

**\*\*\*READ & SAVE THESE INSTRUCTIONS \*\*\***  
**ACCESS LIGHTING**  
**MODEL 62050**  
**INSTALLATION & OPERATION INSTRUCTIONS**

**(1) TOOLS AND MATERIALS REQUIRED**

- ❖ BLADE SCREW DRIVER
- ❖ WIRE CUTTERS
- ❖ WIRING SUPPLIES AS REQUIRED BY ELECTRICAL CODE

***Attention:***

*Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.*

**(2) GENERAL**

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended for mounting to a standard 4" x 2 1/4" deep metal octagon outlet box. The box must be directly supported by the building structure.
4. Before commencing with the installation, **disconnect the power by turning off the circuit breaker** or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

***NOTE:***

*The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.*

**(3) UNPACKING THE FIXTURE**

On checking the contents of the box you will find;

- ❖ Back Plate
- ❖ Mounting Hardware
- ❖ Fixture Base with socket
- ❖ 1 x T-3/118mm/100W Bulb
- ❖ 1 x Bulb Covers

**(4) PREPARE THE FIXTURE**

*Refer to attached illustration of fixture parts and assembly.*

1. If you are replacing an existing fixture disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
2. Secure the **Back Plate** to the junction box with the supplied **Screws (1)**.
3. Pull the Supply wires through the Center Hole in the **Back Plate**.
4. Connect the **BLACK** supply wire to the **Black** wire of the fixture with supplied **Wire Nuts (2)** ensuring a secure connection.
5. Connect the **WHITE** supply wire to the **White** wire from the fixture a secure with supplied **Wire Nuts (2)**.
6. Attach the **ground (GREEN)** wire from the fixture to the **outlet box ground terminal** (or to the box ground wire).
7. Secure all wire nuts connections with UL listed electrical tape. Tuck wires carefully into Junction box.
8. Position the **Fixture Base** over the **Back Plate** ensuring that the holes at the top and bottom of the **Fixture Base** and **Back Plate** are lined up. Direct the thread rods in the back plate through the supplied holes in the fixture base. Secure with the supplied **Brass Nuts (3)**.
9. Secure **Flat Glass (4)** to the **Fixture Base** with the supplied **Brass Nuts (5)**.
10. Insert the supplied **T3/118mm/100Watt HGN bulb (6)**. Do not handle bulb with bare hands, use supplied cloth to handle.

**DO NOT EXCEED WATTAGE SPECIFIED ON WARNING LABEL**

11. Clip on **Tempered Glass Diffuser (7)**.
12. Attach **Glass Diffuser (8)** by fitting into designated slots in **Fixture Base**.
13. Restore electricity and check the operation of your new lighting fixture.


***CAUTION:***

- *Ensure that the Fitting is Cool and Switched off, Before Changing the Bulb.*
- *Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.*

**a c c e s s**

**L I G H T I N G**

Model : 62050

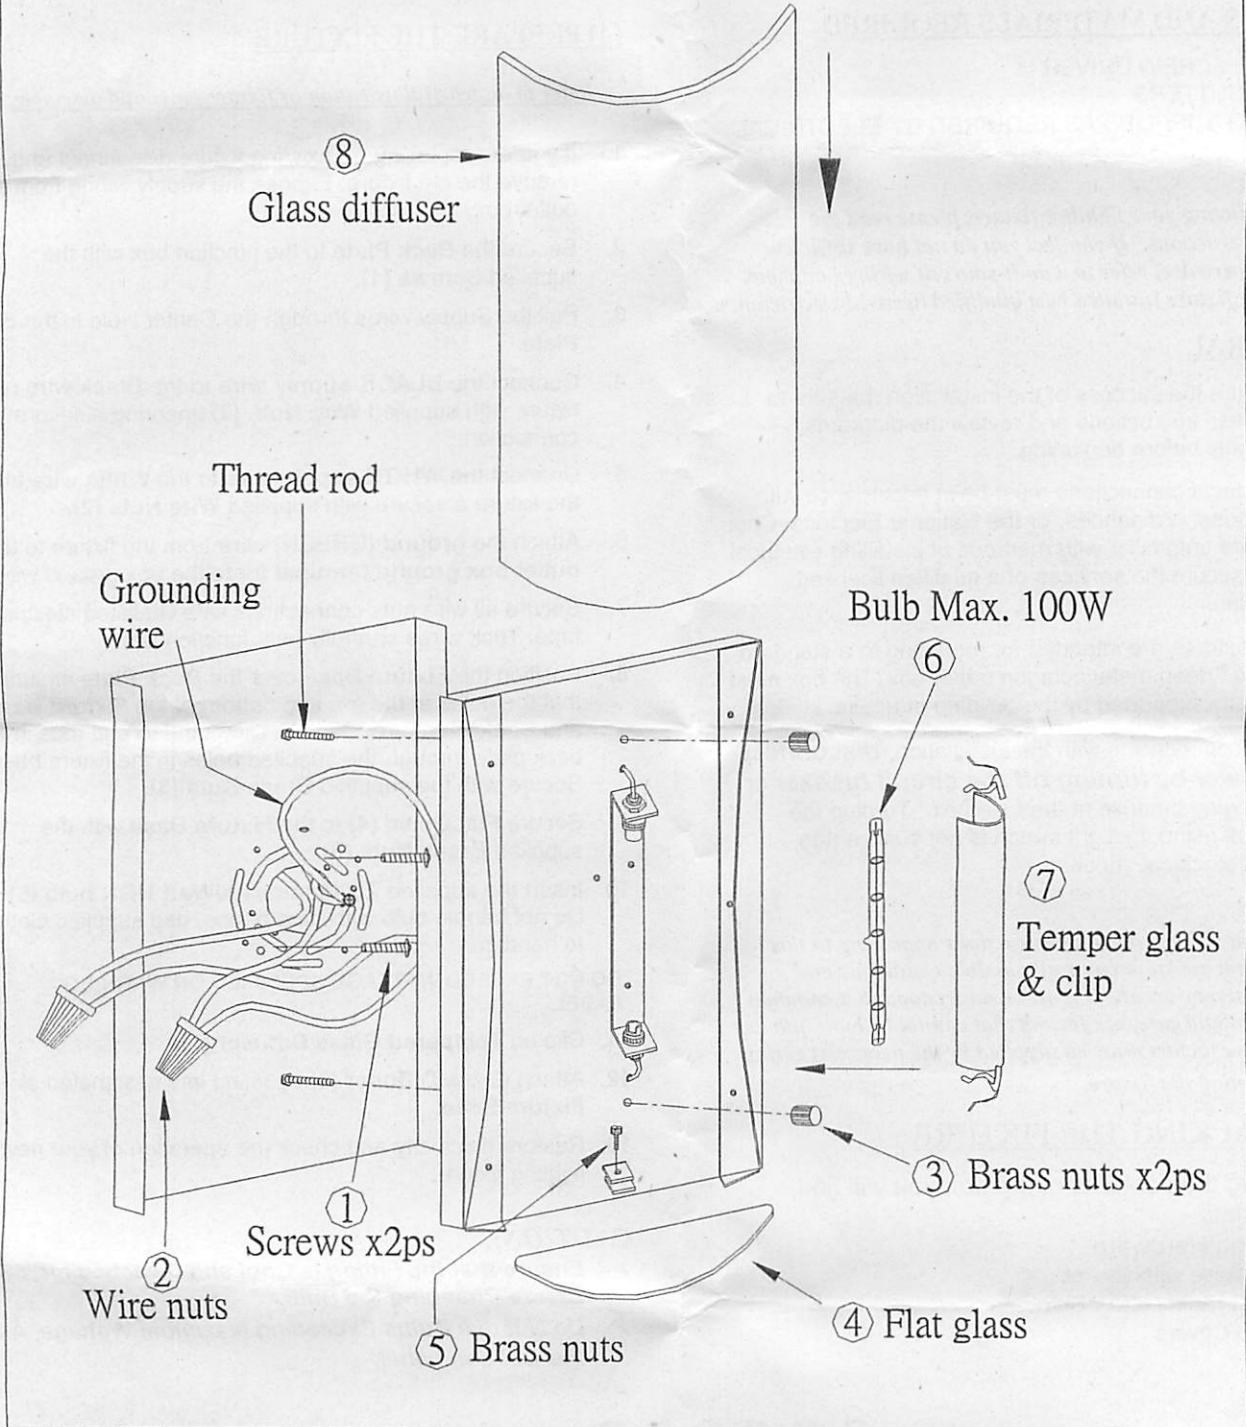

**access**

**LIGHTING**