

AURORALIGHT

REQUIRED TOOLS:


Wire Cutter / Stripper
2-3/4" Hole Saw

CENTRO INSTALL GUIDE

RDL331103 / RDL331203

INSTRUCTIONS:

1. To prevent electrical shock, disconnect transformer from electrical supply and make sure power supply is completely off before installation. Fixtures should always be installed by a licensed electrician.
2. Drill a **2-3/4" hole** in the desired mounting location with a **max thickness of 3/4"** (see figure).
3. Separate the 2-conductor **18AWG lead wires** by pulling apart the ends to desired length. Strip about **1/2"** of the insulation off the ends (see figure).
4. Pull the **main supply cable** through the hole, strip insulation off ends, and connect them to the **18AWG lead wires** using **UL listed wire connectors** suited for the location. Neatly return the connected wires back into the hole (see figure).
5. Compress the **springs** on the side of the fixture by hand and slide it up into the **2-3/4" hole**. Take caution to not release the **springs** until the **fixture** is in the hole and fingers are clear of the area.
6. Apply light upward pressure to the **fixture** until it is flush with the **mounting surface** and **springs** are fully seated and holding it in place.

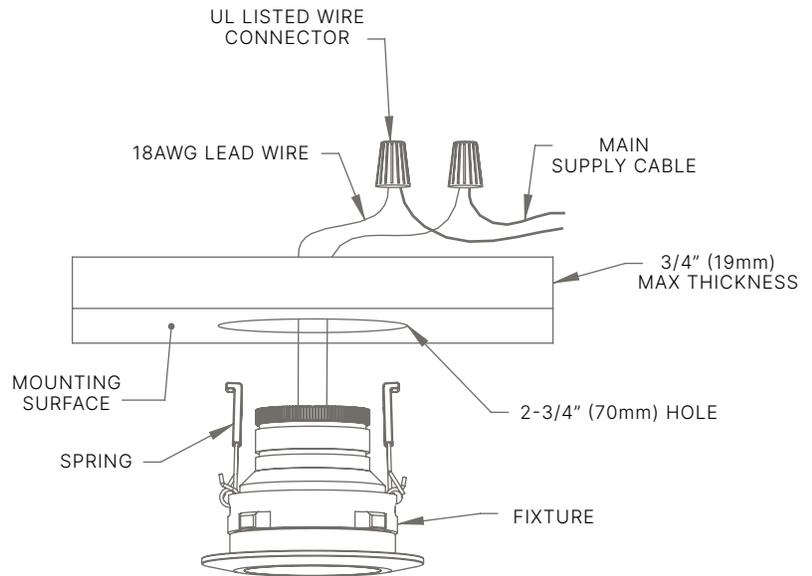

P. 760.931.2910

E. techsupport@auroralight.com

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com

WARNING: Luminaire must be installed in accordance with local codes and the National Electrical Code (NEC). Failure to do so may result in serious injury and or damage to the luminaire.

WARNING: Risk of electric shock. Install per NEC Code 680.22(B) (6), if listed low voltage luminaires are to be located near a pool, spa or fountain.