

AURORALIGHT

REQUIRED TOOLS:


1-3/4" Hole Saw
Wire Cutter / Stripper

CYCLOPS INSTALL GUIDE

DIR060330

INSTRUCTIONS:

1. To prevent electrical shock, disconnect transformer from electrical supply and make sure power supply is completely off before installation. Fixtures should always be installed by a licensed electrician.
2. Drill a **1-3/4" hole** in the desired mounting substrate with a max thickness of $\frac{3}{4}$ " (see figure).
3. Feed the **18GA lead wires** through the hole and **nut** (see figure).
4. Slide the fixture through the hole. Thread the **nut** on the back side and tighten it down by hand.
5. Separate the 2-conductor **18GA lead wires** by pulling apart the ends to desired length. Strip about $\frac{1}{2}$ " of the insulation off the ends (see figure).
6. Connect the **18GA lead wires** to the **main supply cable** using **UL listed connectors** suitable for the mounting location (see figure for configuration).
7. To adjust light aiming, the **ball** can be swiveled around by applying sideways pressure with fingers or hand.

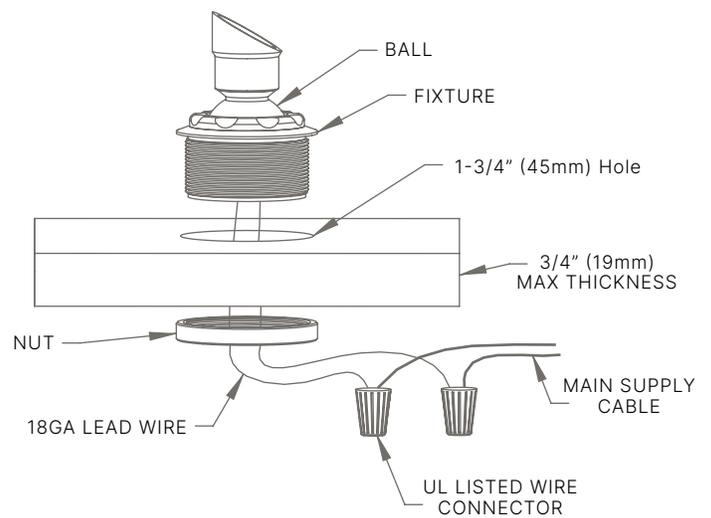

TIP: Small gauge cable is vulnerable to damage in the landscape; Protect by routing in close proximity to the luminaire or adjacent to concrete slab or similar structure. Do not bury more than 6" deep. Do not over tighten.

P. 760.931.2910

E. techsupport@auroralight.com

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com

WARNING: Luminaire must be installed in accordance with local codes and the National Electrical Code (NEC). Failure to do so may result in serious injury and or damage to the luminaire.

WARNING: Risk of electric shock. Install per NEC Code 680.22(B) (6), if listed low voltage luminaires are to be located near a pool, spa or fountain.