

AURORALIGHT

TELLURIDE INSTALL GUIDE

SDL160164

REQUIRED TOOLS:

3/32 Allen Key (Included)
5/32 Allen Key (Included)
3/16 Allen Key
Wire Cutter / Stripper
Phillips Head Screw Driver

INSTRUCTIONS:



1. To prevent electrical shock, disconnect transformer from electrical supply and make sure power supply is completely off before installation. Fixtures should always be installed by a licensed electrician.

If using 1/2" Thread:

2. Secure the **mount** in the desired location, then use the provided Allen key to loosen the **set screws** and remove the **1/2" adapter**.
3. Screw the **1/2" adapter** into the **mount** and tighten down using the 3/16" hex drive. Continue to step 3 below.

If using Surface Mount:

2. Use the provided **#10 wood screws** and anchors (if needed) to screw the **surface mount** down in the desired location (a 1/8" pilot hole is recommended when screwing directly into wood).
3. Slide the **fixture assembly** over the **1/2" adapter/surface mount** and tighten down the **set screws** to lock in place.
4. Strip the outer insulation off the end of the 2-conductor **fixture lead wire** to separate them, then strip about 1/4" of insulation off each conductor.
5. Connect the **fixture lead wire** to the **main supply cable** using **UL listed wire connectors** suitable for the location. Secure all electrical wiring in a neat manner in a desired area.
6. For light angle adjustment about the **fixture rotation point**, apply sideways pressure in the desired direction.
7. To adjust light orientation, loosen the **set screws** and rotate on the **1/2" adapter/surface mount**. Tighten **set screws** down when finished.

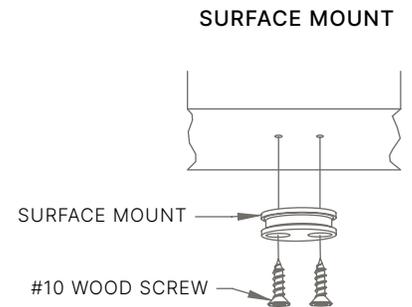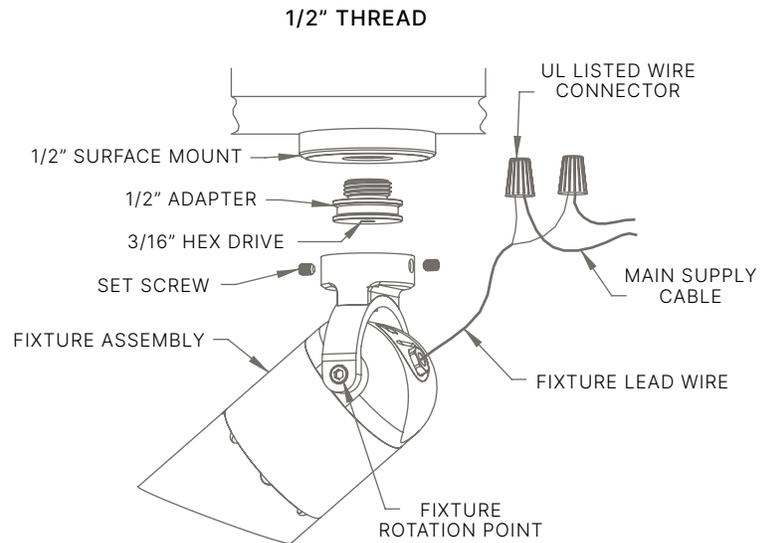

TIP: Small gauge cable is vulnerable to damage in the landscape; Protect by routing in close proximity to the luminaire or adjacent to concrete slab or similar structure. Do not bury more than 6" deep. Do not over tighten.

WARNING: Luminaire must be installed in accordance with local codes and the National Electrical Code (NEC). Failure to do so may result in serious injury and or damage to the luminaire.

WARNING: Risk of electric shock. Install per NEC Code 680.22(B (6), if listed low voltage luminaires are to be located near a pool, spa or fountain.

P. 760.931.2910

E. techsupport@auroralight.com

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com