

access

LIGHTING

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

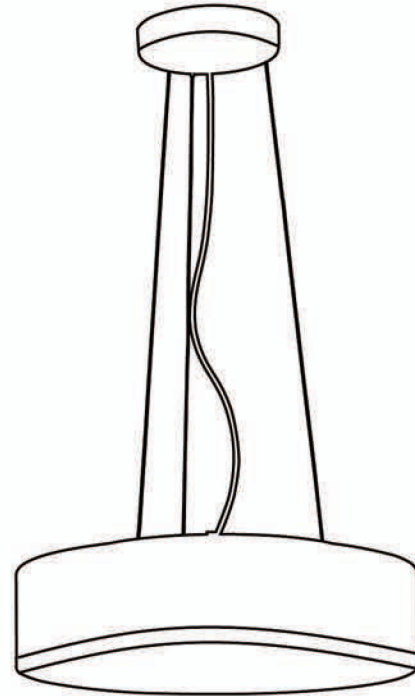

COLLECTION

Aero

APPLICATION

Pendant

MODEL NO.

20673LEDD

WHAT WE PROVIDE

- Crossbar
- Mounting Hardware
- Canopy with Fixture
- 1 x Glass Shade
- LED Module

WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code



PREPARE FIXTURE

1


If there is an existing fixture remove it.

Expose the supply wire from the outlet box .

Determine the desired length of your fixture.

Loosen the strain relief in the center of the canopy and gently pull the wire to the desired length

leaving some slack.Adjust the air craft cable by pushing on the grip lock buttons. Mount the crossbar to the J-Box with the supplied screws ensuring that the additional screws are facing downward.

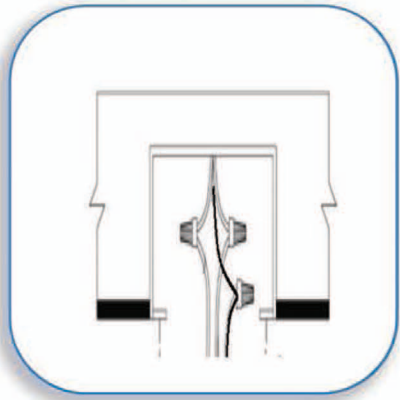

2

CONNECT THE WIRES

Gently pull the supply wires out from the J-box.

Connect the black supply wire to the black fixture wire.

Secure with the supplied wire nuts. Connect the white


supply wires to the white fixture wire. Secure with the

supplied wire nuts. Either wrap the green wire around

one of the protruding screws or connect it to the supply

ground wire. Secure all wires with U.L. Certified electrical tape (not supplied).

Tuck all wires carefully into the J-Box.

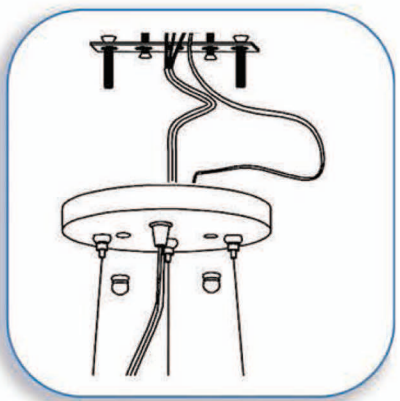

3

MOUNT THE CANOPY

Fit the fixture canopy up to the crossbar. Insert the

hanging screws into the designated holes in the canopy.

Secure with the supplied thumb screws. Adjust the level

of the fixture by pressing on the grip lock buttons

in the canopy and adjusting the air craft cable as

required.



4

SECURE GLASS SHADE

Loosen the screws holding the glass support clips

so that the clips can be adjusted. Fit each clip under

the shelf in the glass and secure by tightening down

the glass support clips.



5

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE

CAUTION Please ensure that the fitting is cool and switched off before replacing the bulb. DO NOT use bulbs that might exceed the maximum wattage, stated on caution label.