SIGNING GENERAL NOTES:

1. *All signs shall be in compliance with the Manual on Uniform Traffic Control Devices (MUTCD), 11th edition, the Arizona supplement to the MUTCD, the ADOT signing and markings drawings and the Traffic Engineering Manual of Approved Signs.*
2. *All sign locations are approximate. The contractor shall verify actual sign locations and actual sign post lengths with the Engineer prior to constructing the foundations for the sign supports.*
3. *The contractor shall be responsible for securing all underground utility locations where foundations are installed. Special care needs to be taken to insure that all underground utilities are avoided. Utility locations are not shown on the signing plans.*
4. *Where signs are being removed or replaced, the foundations shall be removed entirely or the foundation shall be removed a minimum of 2 feet below finished grade, as directed by the Engineer.*
5. *The bottom of each sign shall be at least 7 feet above the nearest edge of pavement and at least 7 feet above the ground under the sign, unless otherwise noted.*
6. *Offsets for all signs shall be measured from the edge of the roadway to the nearest edge of of sign.*
7. *Slip bases shall be installed in accordance with ADOT Standard Drawings S-3 (Sht. 16 of 16).*
8. *Retroflective sheeting on all new signs shall conform to Section 1007 of the specifications and Section 380 of ADOT's Traffic Guidelines and Processes.*
9. *The contractor shall replace any signs, object markers and delineators that are damaged as a result of the construction activities at no additional cost to the Department.*
10. *Signing may be modified as directed by the Engineer.*
11. *All removed signs, structures, and materials shall be the property of the contractor when indicated as being removed, and not relocated, on the sign summary plans.*
12. *Existing signs indicated on the sign summaries that do not need to be removed or relocated shall remain. If construction activities require a sign assembly removal not noted on the plan, the sign assembly shall be replaced as a new and placed as near as possible to the existing location as directed by the Engineer. The removal or replacement for sign assemblies for any construction activity shall be included in the cost of that activity and no further compensation shall be made.*
13. *All new ground-mounted signs shall be installed with two nuts per bolt. All bolts shall have hex heads, not slotted heads. Only cadmium plated or zinc plated plated steel washers shall be used between each bolt head and the face of the panel. The bolts and washers shall not be painted unless the bolt coincides with the sign legend.*
14. *All new signs to be installed on new squared posts with the foundations are indicated in ADOT Standard Drawings.*
15. *Shop drawings will be required.*
16. *The contractor shall contact ADOT Southern Region Signing and Striping, David Lee at (520) 255-1490 or Daniel Acosta at (520) 419-1323, at least 10- days prior to final signing installation to verify the signing layout.*

BID ITEM NO.	ITEM DESCRIPTION	UNIT	TOTAL QNTY
6070048	FOUNDATION FOR SQUARE TUBE POST	EACH	10
6070054	SIGN POST (PERFORATED) (2 S)	L.FT.	12
6070055	SIGN POST (PERFORATED) (2 ½ S)	L.FT.	33
6070057	SIGN POST (PERFORATED) (2 ½ T)	L.FT.	83
6080005	REGULATORY, WARNING, OR MARKER SIGN PANEL	SQ.FT.	68
6080110	REMOVE AND REINSTALL SIGN	EACH	8
6080120	SIGN (REMOVE AND RELOCATE)	EACH	1

NO.	DESCRIPTION OF REVISION - ADDITIONAL SIGN	MADE BY -	DATE -
1		RUB	09/26

Registered Professional Engineer CERTIFICATE NO. 68040 ERIC KOCHER STATE OF ARIZONA — Date Signed 08/26/26

	NAME	DATE
DESIGN	EG	08/26
DRAWN	TB	08/26
CHECKED	EGK	08/26

Kimley»Horn

© 2026 KIMLEY-HORN AND ASSOCIATES, INC.

ARIZONA DEPARTMENT OF TRANSPORTATION
PROJECT DELIVERY AND OPERATIONS DIVISION
PROJECT MANAGEMENT GROUP

SIGNING GENERAL NOTES AND QUANTITIES

ROUTE SR 80
MILEPOST
STRUCTURE NO.

F.H.W.A. Arizona Division

STATE	PROJECT NO.	FEDERAL ID NO.	SHEET NO.	TOTAL SHEETS	RECORD DRAWING
ARIZ.	0000 CH BIS	BIS-0(207)T	17	45	

LOCATION SR80; QUEEN MINE TOUR - OLD BISBEE

DWG NO. T-02.02

TRACS NO. T0621 01C

____ OF____

Plan Sht No.	Sign Number	MOAS Sign Code	Work: New	Work: Existing: Replace Panel	Work: Existing: Relocate Panel	Work: Existing: Relocate Structure	Work: Existing: Remove	Work: Existing: To Remain	Offset (ft)	Mounting Height (ft)	Background Color	Panel: Legend	Panel: Width (in)	Panel: Height (in)	Panel: Area (sq. ft)	Panel: Type	Panel: Bid Item Number	Ground Mounted: Foundations	Ground Mounted: Post: Type	Ground Mounted: Post: Total length (ft)	Ground Mounted: New Slipbases	Ground Mounted: Stringer: Type	Ground Mounted: Stringer: Total length (ft)	Overhead: Structure Type	Overhead: Number of Lights	Remarks
T-02.05	STA 13+51	M3-2						X				EAST														
	+	M1-5a						X				ARIZONA (80)														
	+	M1-4h						X				U.S. Historical Route Marker														
	+	M6-3						X				STRAIGHT ARROW														
T-02.05	STA 13+51	CUSTOM			X					3	BL	VISITOR CENTER					6080110	1	2 1/2S	5						INSTALL BEHIND RETAINING WALL
T-02.05	STA 14+38	W13-6						X				HORIZONTAL ALIGNMENT/ EXIT ADVISORY SPEED (270 DEGREE ARROW)														MOUNTED ON RETAINING WALL
T-02.05	STA 14+42	D17-2						X				NEXT PASSING LANE (500 FEET)														
T-02.05	STA 15+22	W1-2R	X						12	7	YL	Right Curve Symbol	36	36	9.0	RWM	6080005	1	2 1/2T	15	1					
	+	W13-1P	X								YL	20 MPH	30	30	6.3	RWM	6080005									
T-02.06	STA 15+61	D5-105						X				ARIZONA TOURIST INFO														
T-02.06	STA 15+81	R2-1						X				SPEED LIMIT (25)														
T-02.06	STA 16+05	W1-15						X				270 DEGREE LOOP														
	+	W13-1p						X	2			ADVISORY SPEED (15)														
T-02.06	STA 16+07	R2-1	X						12	7	WH	SPEED LIMIT (25)	30	36	7.5	RWM	6080005	1	2 1/2S	13						
T-02.06	STA 16+71	CUSTOM						X				OLD BISBEE														
T-02.06	STA 17+13	R5-1						X				DO NOT ENTER														
T-02.06	STA 17+44	R4-7						X				Keep Right Symbol														
	+	OM1-2						X				TYPE 1 OBJECT MARKER														
T-02.06	STA 17+47	W1-8R						X				Right Chevron														
T-02.06	STA 17+73	W12-2						X				13'-5" CLEARANCE SYMBOL														
T-02.06	STA 17+81	W1-8R						X				Right Chevron														
T-02.06	STA 17+81	R1-1						X				STOP														
T-02.06	STA 17+97	CUSTOM						X				ARIZONA (80) / OLD BISBEE														
T-02.06	STA 18+08	R5-1						X				DO NOT ENTER														
	+	CUSTOM						X				VISITOR CENTER														
T-02.06	STA 18+09	W1-8R						X				Right Chevron														
T-02.06	STA 18+09	W1-8R						X				Right Chevron														
T-02.06	STA 18+09	R5-1						X				DO NOT ENTER														
T-02.06	STA 18+24	R6-1R			X				5	WH		ONE WAY (Right)					6080110	1	2S	12						

NOTES:

1. *The Contractor shall verify post lengths and elevations.*
2. *The Engineer may shift a sign in order to achieve a more desirable location.*
3. *Quantities are approximate and for the Contractor's information only.*

PANEL TYPES:

RWM: Regulatory, Warning, or Marker
F-DA: Flat-sheet aluminum
F-Dem: Flat-sheet aluminum with demountable characters
Ext: Aluminum extrusions
Incr: Aluminum sheet increment
Over: Overhead (New overlaid extrusions)

COLORS:

BK: Black
BL: Blue
BR: Brown
GR: Green
RD: Red
WH: White
YL: Fluorescent Yellow

POST TYPES:

S: Single perforate
T: Telescoping perforated

STRINGER TYPES:

P: Square-tube Post
T: T-section (WT 3x6)

NO.	DESCRIPTION OF REVISION - ADDITIONAL SIGN	MADE BY - RUB	DATE - 09/26

Registered Professional Engineer — CERTIFICATE NO. 68040 — ERIC KOCHER — STATE OF ARIZONA — Date Signed 09/30/26

	NAME	DATE
DESIGN	EG	08/26
DRAWN	TB	08/26
CHECKED	EGK	08/26

Kimley»Horn
© 2026 KIMLEY-HORN AND ASSOCIATES, INC.

ARIZONA DEPARTMENT OF TRANSPORTATION
PROJECT DELIVERY AND OPERATIONS DIVISION
PROJECT MANAGEMENT GROUP

SIGN SUMMARY

ROUTE SR 80
MILEPOST
STRUCTURE NO.

F.H.W.A. Arizona Division

STATE	PROJECT NO.	FEDERAL ID NO.	SHEET NO.	TOTAL SHEETS	RECORD DRAWING
ARIZ.	0000 CH BIS	BIS-0(207)T	19	45	

LOCATION SR80; QUEEN MINE TOUR - OLD BISBEE
DWG NO. T-02.04
TRACS NO. T0621 01C
____ OF ____

MATCH LINE T-02.05

MATCH LINE 14+60

Naco Rd

SR 80

Main St

Dart Rd

Future Improvements

Exst R/W

Existing to be Obiterated

6" Double Yellow

6" White

6" Yellow
3' Stripe
9' Gap

Sta 15+96
Car Symbol
AHEAD

Pedestrian Symbol
KEEP RIGHT
Arrow

New R/W

6" Yellow

Look Legend Arrow

24" Green
48" Space
12" Width

6" White
2' Stripe
4' Gap

6" Yellow
2' Stripe
4' Gap

Look Legend Arrow

Connect to the existing SUP via Project T0413

6" Yellow
2' Stripe
4' Gap
6" Yellow

Sta 15+81 Existing — SPEED LIMIT 25 — Protect In Place

Sta 15+61 Existing — ARIZONA TOURIST INFO — Protect In Place

Sta 15+22 New — 20 MPH

Sta 16+07 New — SPEED LIMIT 25

Sta 16+05 Existing — Protect In Place

Sta 16+71 Existing — OLD BISBEE — Protect In Place

Sta 17+13 Existing — DO NOT ENTER — Protect In Place

Sta 17+42

Sta 17+44 Existing — Protect In Place

Sta 17+47 Existing — Protect In Place

Sta 17+73 Existing — 13.5 — Protect In Place

Sta 17+81 Existing — Protect in Place

Sta 17+97 Existing — OLD BISBEE — 80 WEST — Protect In Place

Sta 18+09 Existing — Protect In Place

Sta 18+09 Existing — DO NOT ENTER — Protect In Place

Sta 18+09 Existing — Protect In Place

Sta 17+81 Existing — STOP — Protect In Place

Sta 18+08 Existing — VISITOR CENTER — DO NOT ENTER — Protect In Place

Sta 18+18 Car Symbol Ahead

Sta 19+13 Existing — STOP — Protect In Place

Sta 16+78 Existing — DO NOT ENTER — Protect In Place

Sta 18+53 Existing — Protect In Place

Sta 19+19 Existing — Protect In Place

Sta 17+68 Existing — ONE WAY — Relocate to Sta 18+24

Sta 18+42 Existing — STOP — Relocate to Sta 18+39

Sta 18+70 Existing — CUSTOM PRIVATE SIGN — Protect In Place

Sta 18+58 Existing — 80 WEST — 80 EAST — Protect In Place

Sta 18+45 Existing — VISITOR CENTER — Relocate to Sta 18+45

Sta 17+21

Sta 17+30

Sta 17+58

15

16

17

18

19

NO.	DESCRIPTION OF REVISION - ADDITIONAL SIGN	MADE BY -	DATE -
1		RUB	09/26

Registered Professional Engineer — CERTIFICATE NO. 68040 — ERIC KOCHER — Date Signed 09/30/26

	NAME	DATE
DESIGN	EG	08/26
DRAWN	TB	08/26
CHECKED	EGK	08/26

Kimley»Horn
© 2026 KIMLEY-HORN AND ASSOCIATES, INC.

ARIZONA DEPARTMENT OF TRANSPORTATION
PROJECT DELIVERY AND OPERATIONS DIVISION
PROJECT MANAGEMENT GROUP

MAIN STREET
SIGNING AND MARKING PLAN
STA 14+60 TO 19+00

ROUTE SR 80
MILEPOST
STRUCTURE NO.

F.H.W.A. Arizona Division

STATE	PROJECT NO.	FEDERAL ID NO.	SHEET NO.	TOTAL SHEETS	RECORD DRAWING
ARIZ.	0000 CH BIS	BIS-0(207)T	22	45	

LOCATION SR80; QUEEN MINE TOUR - OLD BISBEE

TRACS NO. T0621 01C

DWG NO. T-02.07

____ OF ____

8:41:47 AM 9/30/2026 Robert.Brodar K:\PHX_Roadway\Worksets\ADOT_PROJECTS_2022R3_10.12_291728053-T0621_Bisbee SUP West\dgn\Traffic\T0621_SM02.dgn



PLANT LEGEND:

TREES

SYMBOL	BOTANICAL NAME / COMMON NAME
	CHILOPSIS LINEARIS DESERT WILLOW
+	EXISTING TREE TO REMAIN

SHRUBS/ACCENTS

SYMBOL	BOTANICAL NAME / COMMON NAME
*	AGAVE PALMERI PALMER'S AGAVE
*	DASYLIRION WHEELERI DESERT SPOON

MISC. LANDSCAPE MATERIALS

SYMBOL	PRODUCT
	DECOMPOSED GRANITE
	RIPRAP (D$_{50}$ = 9") 1

NO.1	DESCRIPTION OF REVISION - REVISED LANDSCAPE NOTE	MADE BY - RUB	DATE - 09/26

Registered Landscape Architect
50732
REBECA V. FIELD
Date Signed 9.19.26
ARIZONA U.S.A.

	NAME	DATE
DESIGN	EMH	08/26
DRAWN	EMH	08/26
CHECKED	RVF	08/26

Kimley»Horn
© 2024 KIMLEY-HORN AND ASSOCIATES, INC.

ARIZONA DEPARTMENT OF TRANSPORTATION
PROJECT DELIVERY AND OPERATIONS DIVISION
PROJECT MANAGEMENT GROUP

LANDSCAPE PLAN

ROUTE SR 80
MILEPOST
STRUCTURE NO.

F.H.W.A. Arizona Division	STATE	PROJECT NO.	FEDERAL ID NO.	SHEET NO.	TOTAL SHEETS	RECORD DRAWING
	ARIZ.	0000 CH BIS	BIS-0(207)T	33	45	


LOCATION SR80; QUEEN MINE TOUR - OLD BISBEE

DWG NO. R-03.02

TRACS NO. T0621 01C

____ OF____

NO.	DESCRIPTION OF REVISION	MADE BY	DATE
1	REVISED LANDSCAPE NOTE	RJB	09/26

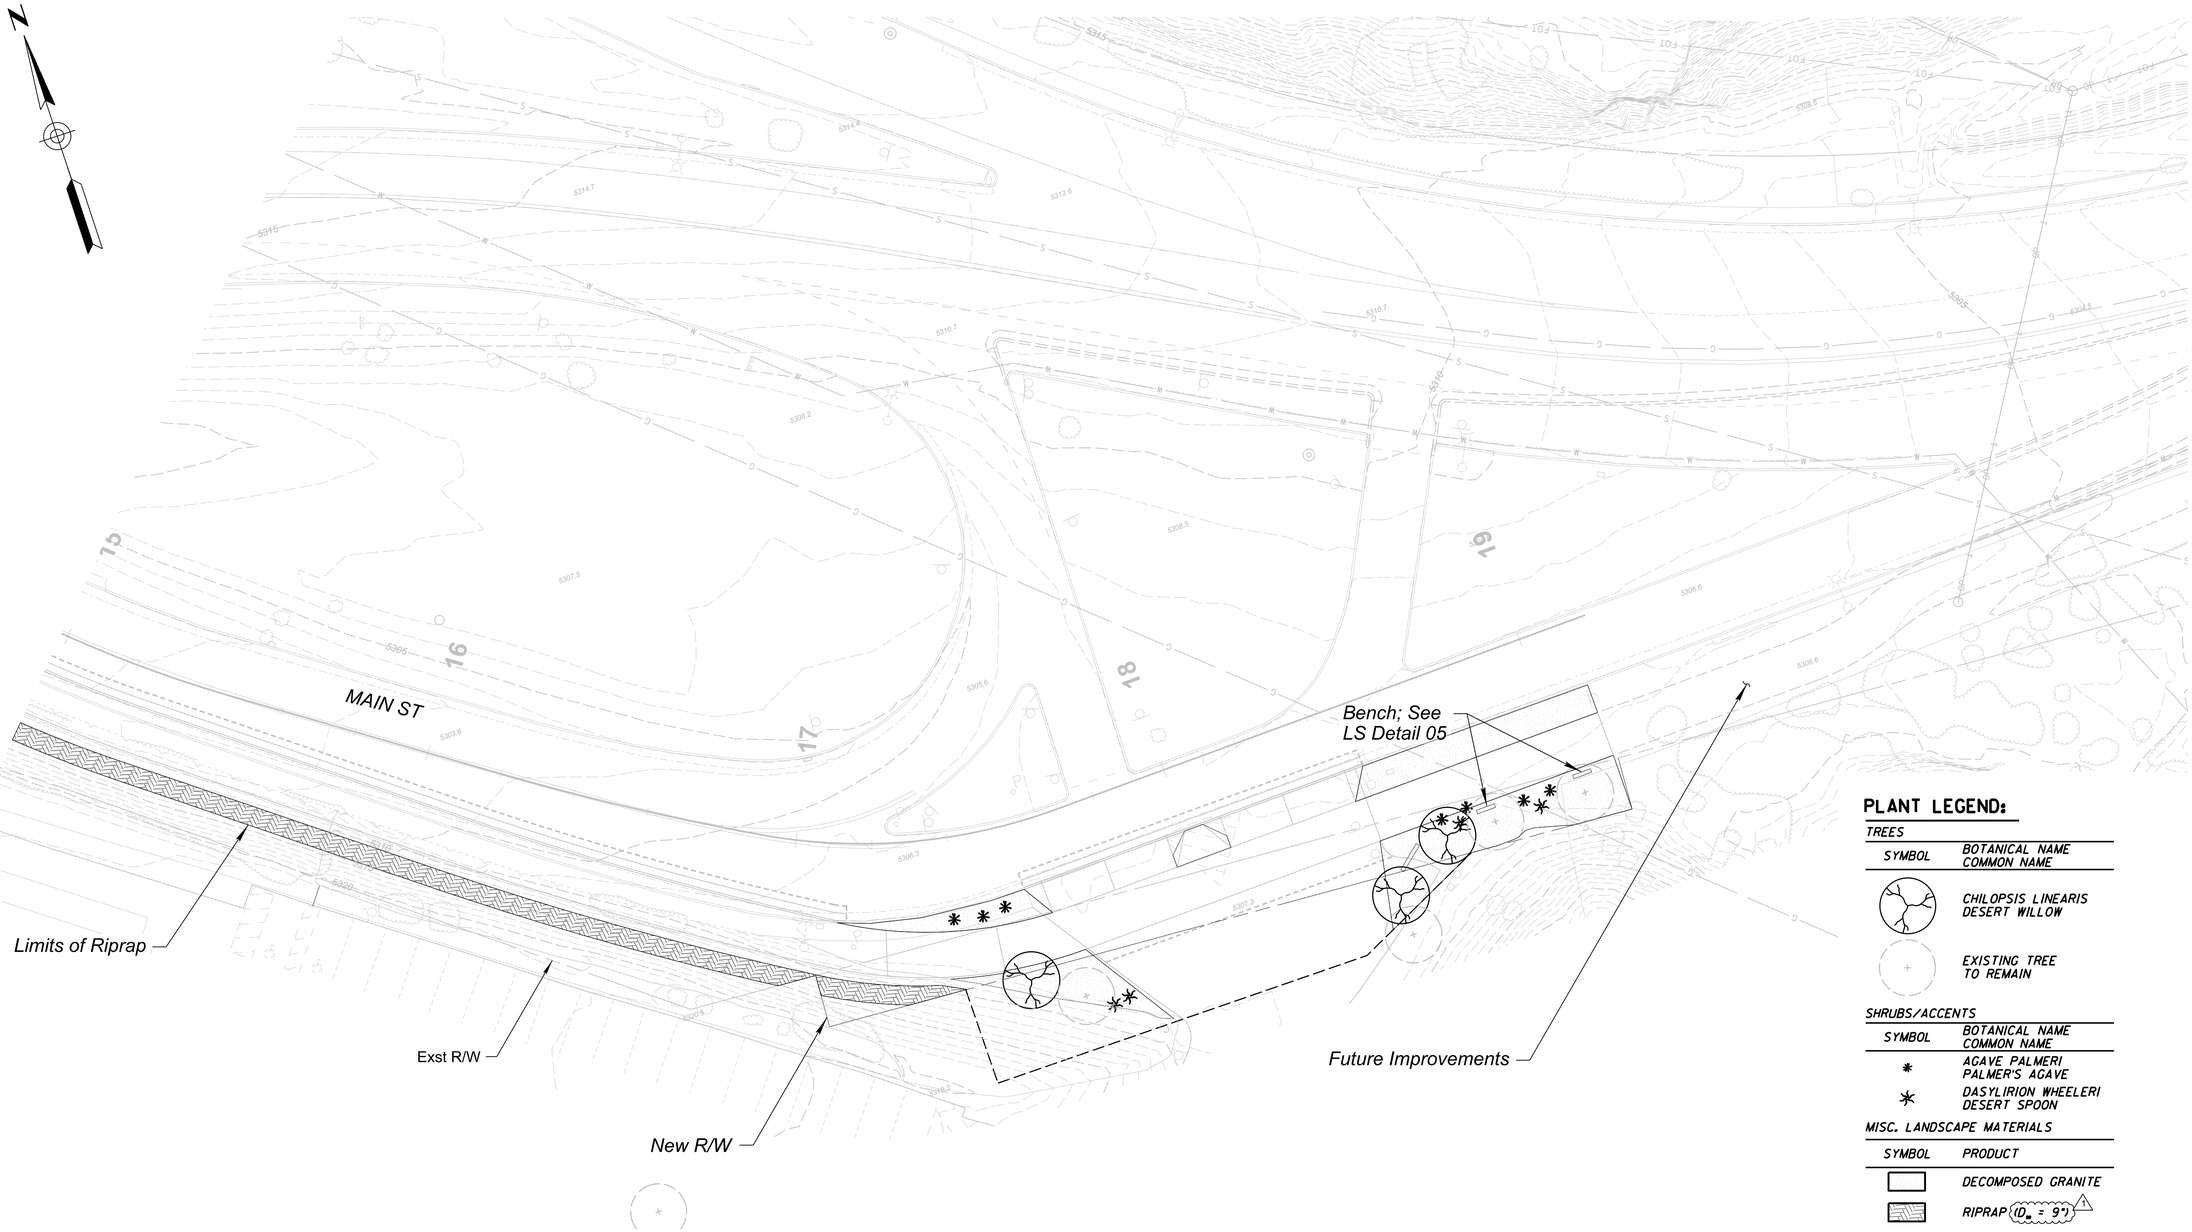

PLANT LEGEND:

TREES

SYMBOL	BOTANICAL NAME COMMON NAME
	CHILOPSIS LINEARIS DESERT WILLOW
+	EXISTING TREE TO REMAIN

SHRUBS/ACCENTS

SYMBOL	BOTANICAL NAME COMMON NAME
*	AGAVE PALMERI PALMER'S AGAVE
*	DASYLIRION WHEELERI DESERT SPOON

MISC. LANDSCAPE MATERIALS

SYMBOL	PRODUCT
	DECOMPOSED GRANITE
	RIPRAP (D_{50} = 9")

Registered Landscape Architect
CERTIFICATE NO.
50732
REBECA V. FIELD
Date Signed 9/30/26
ARIZONA USA

	NAME	DATE
DESIGN	EMH	08/26
DRAWN	EMH	08/26
CHECKED	RVF	08/26

Kimley»Horn

© 2024 KIMLEY-HORN AND ASSOCIATES, INC.

ARIZONA DEPARTMENT OF TRANSPORTATION
PROJECT DELIVERY AND OPERATIONS DIVISION
PROJECT MANAGEMENT GROUP

LANDSCAPE PLAN

ROUTE	F.H.W.A. Arizona Division	STATE	PROJECT NO.	FEDERAL ID NO.	SHEET NO.	TOTAL SHEETS	RECORD DRAWING
SR 80		ARIZ.	0000 CH BIS	BIS-0(207)T	34	45	
MILEPOST	LOCATION SR80; QUEEN MINE TOUR - OLD BISBEE						DWG NO. R-03.03
STRUCTURE NO.	TRACS NO. T0621 01C						____ OF ____