

access

L I G H T I N G

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.

NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.



COLLECTION

Pulse

APPLICATION

Pendant

MODEL NO.


70031LED

WHAT WE PROVIDE

- Crossbar
- Canopy with Fixture
- 1 x Glass shade
- LED

WHAT YOU NEED


- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

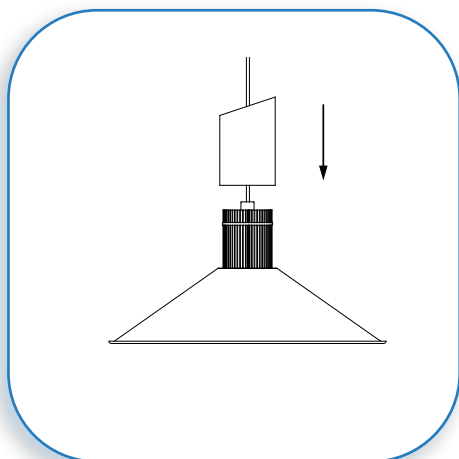

1

PREPARE FIXTURE


Place the glass shade through the wire to the fixture.

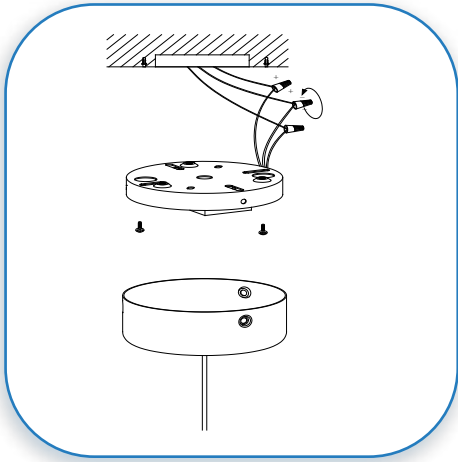

2

CONNECT THE WIRES


Expose the supply wire from the outlet box .
 Gently pull the supply wires. Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground wire. Secure all wires with U.L. Certified electrical tape (not supplied).
 Tuck all wires carefully into the J-Box.
 Mount the crossbar to the J-box with the supplied screws.

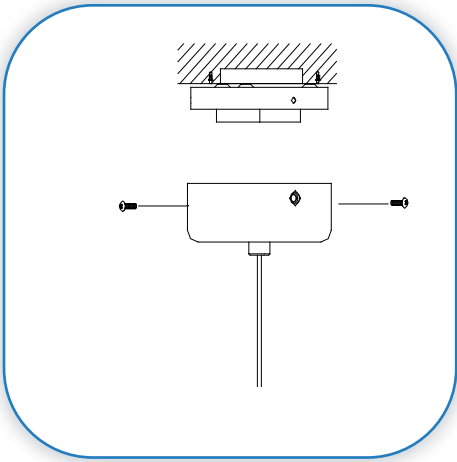

3

MOUNT THE CANOPY

Fit the fixture canopy up to the crossbar. Align the hole of the side of canopy and secure with the supplied screws.

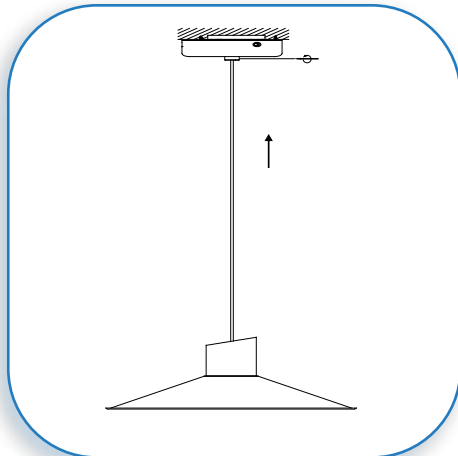

4

SECURE THE STRAIN RELIEF

Adjust the length of fixture and secure with the supplied the strain relief screw.

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE