

**Arxis™**

## Recessed Emergency Light

The Arxis™ Recessed Emergency Light is designed for recessed wall or ceiling application. Under normal conditions, the unit is completely concealed. Once power is lost, the door rotates open to reveal the emergency lights. The powder-coated aluminum head unit is finished in off-white to integrate with most ceiling paints. The rough-in section is constructed from heavy-duty galvanized steel. Mounting hardware and bar hangers are included for T-bar, sheet rock, wall stud, or ceiling beam installation.



	Features
<b>Body</b>	Galvanized steel body designed to be recessed. Panel rotates during power loss to reveal emergency lights
<b>Battery</b>	Lead Calcium or Nickel Cadmium
<b>Illumination</b>	MR16 Halogen lamps; select from 12 to 50 Watts MR16 LED lamps; select from 4 to 6 Watts
<b>Operating Temp</b>	32°F to 104°F (0°C to 40°C)
<b>Electronics</b>	120/277Volt 60Hz Maximum power consumption of .25 Amps. Low-Voltage disconnect, brownout protection, and pulse-plus charging circuitry
<b>Self-Diagnostics</b>	Self-Test is optional on all Self-Powered models. It continuously monitors critical functions in the unit. In the event of a malfunction, the pilot light will change color from green to flashing red. A legend is available on the door back. The Self-Test will be conducted at least 30 seconds every 30 days, for 30 minutes every 6 months and for 90 minutes a year.
<b>Warranty</b>	5 -year limited warranty

**Highlights**

- Recessed design
- Panel rotates in power loss, showing emergency lights
- Ultra bright LED lamps (optional)
- Damplocation rated option

**Compliance**

- ANSI/NFPA-101
- ANSI/NFPA-70
- ICC (IBC & IFC)
- OSHA
- CSA-USA
- NYC Approved




## Arxis™

## Recessed Emergency Light

### Product Dimensions & Details

Weight: 15 lbs. (6.80kg)

### Ordering Information

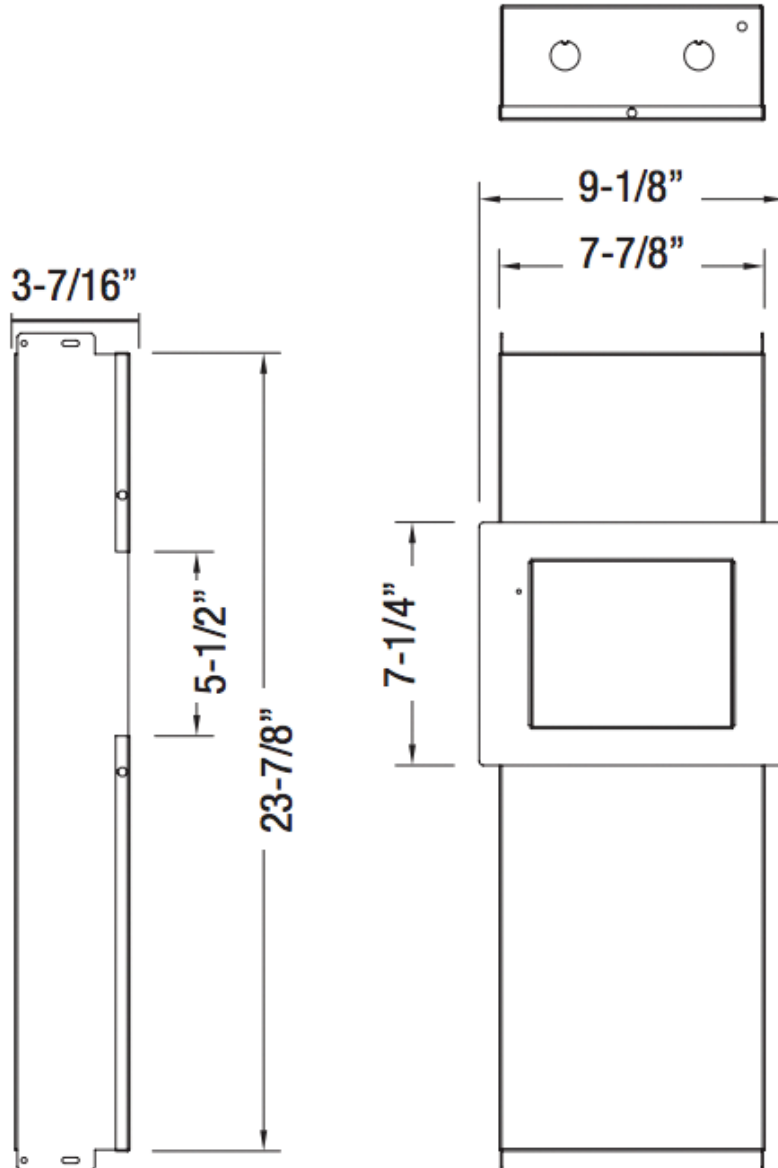

**Example:** ARXS-LC-4C-RC-SD

#### Series

ARXS = Arxis™ Combination Sign

#### Battery Type

LC = Lead Calcium

NC = Ni-Cad

#### Operation

4C = 12V, 40W

4F = 12V, 70W

4H = 12V, 110W

#### Lamp Type

RC = MR16 12V, 12W

RD = MR16 12V, 20W

RE = MR16 12V, 35W

RF = MR16 12V, 50W

LH = MR16 LED 12V, 4W

LJ = MR16 LED 12V, 5W

LK = MR16 LED 12V, 6W

#### Housing Color

SD = Self Diagnostics

TD = 15 Minute Time Delay

LD = Damp Location

The Exit Store LLC  
 303 W Lancaster Ave #138  
 Wayne, PA 19087  
 Toll Free: 844-438-3948 [844-GET-EXIT]  
 Tel: 484-913-1916  
 Fax: 484-913-1919  
 sales@theexitstore.com

[www.theexitstore.com](http://www.theexitstore.com)