



AP Design Ltd

SPECIFICATION


of work to be done and materials to be used in carrying out the works shown on the accompanying drawings

Signature Homes North Ltd

Specification

21 Pajet Street, Lot 428 Prestons Park, Marshlands, Christchurch, New Zealand
Project Ref: 3880

Printed: 08 April 2019

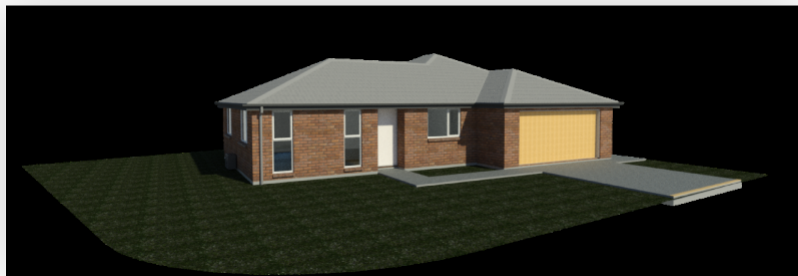

masterspec

Specification built using Masterspec software
Project ID: 174122 - 129559

TABLE OF CONTENTS

1210 PROJECT.	3
1212 COMPLIANCE	4
1213 SELECTIONS	5
1220 GENERAL REQUIREMENTS	9
1233 DOCUMENTS REFERENCED	13
2200 GROUNDWORKS & PREPARATION	16
3110 CONCRETE WORK	18
3800 TIMBER FRAMING	20
4261 BRICK VENEER	22
4310 ROOFING	24
4520 ALUMINIUM WINDOWS & DOORS	26
4610 GLAZING	28
4710 THERMAL INSULATION	29
5110 INTERIOR LININGS & TRIM	30
5230 INTERIOR DOORS & FRAMES	32
6300 FLOOR COVERING	33
6700 PAINTING	35
7120 WATER SYSTEM	37
7150 SANITARYWARE, TAPWARE & ACCESSORIES	39
7410 RAINWATER SPOUTING SYSTEM	40
7420 SANITARY WASTE SYSTEM	41
7430 DRAINAGE SYSTEMS	42
7700 ELECTRICAL	44



masterspec

Verified spec ID: **180054-129559**

This specification has been produced using Masterspec software and completed on 08/04/2019.

Scan to verify or go to masterspec.co.nz/verify

1210 PROJECT.

1 GENERAL

1.1 PROJECT

Street address:	21 Pajet Street, Prestons Park, Marshlands, Christchurch, 8083
Legal description:	Lot 428, DP 525627
Site area:	458m ²
Project type:	New House
Intended use:	Single residential building
Intended life:	Indefinite but not less than 50 years

1.2 PROJECT DESCRIPTION

New single material dwelling with attached garage for Signature Homes North Christchurch

1.3 LBP REQUIREMENT

Any site license LBP's shall have a minimum:
Site license in area of practice 1

Bricklaying 1 : Brick veneer

Carpentry

Foundations 1: Concrete foundation walls and concrete slab-on-ground

Roofing 3: Metal tile roof

1.4 OWNER

Name:	BHC Ltd Signature Homes North Christchurch
Mailing address:	30 Main North Road, Papanui, Christchurch, 8053

1.5 DESIGNER

Name:	AP Design Ltd on behalf of Signature Homes North Christchurch
Mailing address:	128 Montreal Street, Sydenham, Christchurch, 8023
Telephone:	03 942 1977

1.6 CONTRACTOR

Name:	BHC Ltd Signature Homes North Christchurch (Adam Baylis)
Mailing address:	30 Main North Road, Papanui, Christchurch, 8023
Cell (Adam Baylis):	027 2777 122
Telephone:	0800 744 628

1212 COMPLIANCE

1 GENERAL

1.1 SITE DATA

Soil type:	D/E (to NZS 3604 , 3.2 Soil types)
Exposure zone:	Zone C (to NZS 3604 , 4.2 Exposure zones or E2/AS1 Zone E severe marine)
Wind zone:	High (to NZS 3604 , table 5.4 Determination of Wind Zone)
Earthquake zone:	Zone 2 (to NZS 3604 , figure 5.4 Earthquake zones)

1.2 BUILDING DATA

Building classification:	2 Importance Level (to NZS 3604 , table 1.1 Classification of buildings)
Floor live load:	2 KPa (to NZS 3604 , table 1.2 Imposed floor live load reference values)
Overall height:	5.15 metres (in accordance with NZS 3604 , Fig 1.2 Buildings covered by this Standard)
Risk assessment:	3 Total Risk Score (to NZBC E2/AS1 , 3.1 Establishing the risk)

1.3 PRODUCER STATEMENTS

Provide Producer Statements for the following

- Truss design
- Wet area interior waterproofing
- Aluminium joinery
- Glazing

Provide Producer Statements in the required form. Where no form is specified provide in the industry/trade standard form. Provide all Producer Statements before the Building Consent Authority carries out the final inspection.

1.4 RECORDS OF WORK

Provide Records of Work for Restricted Building Work:

- Brick veneer
- Carpentry
- Roofing
- Foundations

Refer to the Building Consent for specific requirements. Provide Records of Work in the required form. Provide all Records of Work before the Building Consent Authority carries out the final inspection.

1213 SELECTIONS

1 GENERAL

The following selections are to be read in conjunction with the related work sections, where they are available, and the general sections.

2 SITE

<< 2200 GROUNDWORKS AND PREPARATION >>

2.1 FILL FOR GROUNDWORK

Type: AP40 & AP65

3 STRUCTURE

<< 3110 CONCRETE WORK >>

3.1 DAMP-PROOF MEMBRANE - UNDER SLAB

Type/thickness: Thermathene Black 250um

3.2 CONCRETE REINFORCEMENT

Type: Refer to Architectural Drawings, Firth RibRaft Floor System Section 2: Installation Information and Section 3: Verification

3.3 CONCRETE

Location: Firth RibRaft Floor System
Strength: Firth RibRaft Raftmix 20 MPa
Surface finish: U3

<< 3800 TIMBER FRAMING >>

3.4 EXTERIOR WALL TIMBER FRAMING

Type/treatment: Radiata pine, Grade SG8, Treated H1.2
Jamb battens: Radiata pine, Treated H3.1

3.5 ROOF TIMBER FRAMING

Type/treatment: Radiata pine, Grade SG8, Treated H1.2

3.6 ROOF TRUSSES

Type/treatment: Radiata pine, Grade SG8, Treated H1.2
Truss supplier: Carters frame & truss_Madras Street

3.7 INTERIOR WALL TIMBER FRAMING

Type/treatment: Radiata pine, Grade SG8, Treated H1.2

4 ENCLOSURE

<< 4160 DAMP-PROOFING, UNDERLAYS AND RIGID AIR BARRIERS >>

There is no work section specification relating to the following selections

4.1 DAMP-PROOF COURSE

Brand/Type: Thermakraft supercourse 500

4.2 WALL UNDERLAY

Brand/Type: Thermakraft CoverTek 403, with strapping

4.3 ROOF UNDERLAY

Brand/Type: Thermakraft CoverTek 407, self supporting & fire retardant

4.4 WINDOW FLASHING TAPE

Brand/Type: 0.55 colorsteel powdercoated to match joinery

<< 4239 SOFFIT LINING >>**4.5 SOFFIT**

Brand/Type/thickness: James Hardie / HardieSoffit / 4.5 mm
 Fixings: Refer to manufactures installation guide
 Joints: uPVC
 Finish: Paint

<< 4261 BRICK VENEER >>**4.6 BRICK VENEER**

Brand/Type: NZ Brick / 70 series, range TBC
 Bond: stretcher
 Pointing: 10mm tooled concave

<< 4310 ROOFING >>**4.7 ROOFING**

Brand/Type: Metalcraft 0.39BMT Chateau metal tiles
 Colour: TBC

<< 4520 ALUMINIUM WINDOWS AND DOORS >>**4.8 ALUMINIUM WINDOWS AND DOORS**

Brand/Type: Residential
 Finish/colour: Powdercoated / TBC
 Jamb liners: 19mm H3.1 Pine
 Hardware: TBC

<< 4710 THERMAL INSULATION >>**4.9 WALL INSULATION**

Brand/Type: Fibreglass
 R value: R 2.6 to house

4.10 CEILING/ROOF INSULATION

Brand/Type: Fibreglass
 R value/Thickness: R3.6 to house

<< 4820 FLASHINGS >>

There is no work section specification relating to the following selections

4.11 FLASHINGS - GENERALLY

Type: 0.55 Colorsteel

5 INTERIOR**<< 5110 INTERIOR LININGS AND TRIM >>****5.1 WALL LININGS**

Location: Refer to plans
 Brand/Type/thickness: GIB / standard & aqualine / 10mm
 Finish: L4

5.2 CEILING LININGS

Location: Refer to plans
 Brand/Type/thickness: GIB / standard & aqualine / 13mm
 Finish: L4

5.3 INTERIOR TRIM

Skirtings: 60mm Pine

<< 5230 INTERIOR DOORS & FRAMES >>**5.4 INTERIOR DOORS**

Location: Refer to plans
 Leaf type/finish: TBC / 810mm / paint
 Frame type/finish: 19mm Pine rebate
 Hardware: TBC

<< 5520 HARDWARE >>

There is no work section specification relating to the following selections

5.5 HARDWARE BRAND TYPE

TBC

6 FINISH**<< 6200 TILING >>****6.1 VINYL**

Location: Entry, Kitchen, Pantry, Bath rm, Ensuite
 Vinyl /substrate: TBC / New concrete

<< 6700 PAINTING >>**6.2 EXTERIOR PAINTING**

Soffit: Resene or Dulux equivalent

6.3 INTERIOR PAINTING

Walls: Resene Waterborne lumbersider
 Ceiling: Resene waterborne lumbersider
 Doors: Resene Enamel
 Cabinetry: Resene Enamel
 Trim: Resene Enamel

7 SERVICES**<< 7120 WATER SYSTEM >>****7.1 WATER SYSTEM**

Water heater type: 180L HWC
 Water heater brand/model: TBC

<< 7410 RAINWATER SPOUTING SYSTEM >>**7.2 SPOUTING**

Brand/type/size: Metalcraft Colonial Quad

7.3 DOWNPIPES

Brand/type/size: uPVC80mmØ

<< 7550 HEATING >>

There is no work section specification relating to the following selections

7.4 SPACE HEATING

Brand/type/reference: Heat Pump

8 EXTERNAL

<< 8000 LANDSCAPE >>

There is no work section specification relating to the following selections

8.1 DRIVEWAY

Type/finish: Plain concrete

1220 GENERAL REQUIREMENTS

1 GENERAL

1.1 THE WORKS

The works are as described in this specification and shown on the drawings.

1.2 PERSONNEL

Owner: The person defined as "owner" in the New Zealand Building Code.

Contractor: The person contracted by the owner to carry out the contract.

1.3 THE SITE

The site of the works, the site address and the legal description are listed under the sections 1210 PROJECT. Confine access and work to the area of site indicated on the drawings.

1.4 SPECIFICATION SECTIONS

Sections are for reference and convenience only and do not constitute individual trade sections or work elements. Read all sections together and read this section with all other sections.

1.5 INTERPRETATIONS

Required:	Required by the documents, or by a statutory authority.
Proprietary:	Identifiable by naming the manufacturer, supplier, installer, trade name, brand name, catalogue or reference number.
Approval:	Approval in writing.
Direction:	Direction in writing.
Notified:	Notified in writing.

1.6 ABBREVIATIONS

The following abbreviations are commonly used throughout the specification:

AS	Australian Standard
AS/NZS	Joint Australian/New Zealand Standard
BCA	Building Consent Authority
BRANZ	Building Research Association of New Zealand
LBP	Licensed Building Practitioner
NZBC	New Zealand Building Code
NZS	New Zealand Standard
NZS/AS	Joint New Zealand/Australian Standard
NUO	Network Utility Operator
OSH	Occupational Safety and Health
RBW	Restricted Building Work
TA	Territorial Authority

1.7 INCONSISTENCIES

If there are any inconsistencies, errors or omissions in or between documents, the contractor must seek direction in resolving it. Figured dimensions take precedence over scaled dimensions; drawings to a larger scale take precedence over drawings to a smaller scale and drawings take precedence over specification.

1.8 SUBSTITUTIONS

A substitution may be proposed where specified products are not available, or if substitute products are brought to the attention of and are considered by the owner as equivalent or superior to those specified. Except where a specified product is not available, the owner is not bound to accept any substitutions.

Notify proposed substitution of specified products. Include sufficient information to allow the owner to confirm that the substitution is equivalent or superior to that specified. Advise the owner whether an amendment will or may be required to the Building Consent and the expected costs of such amendment.

1.9 THE WORDS "PROVIDE" OR "FIX"

The words "provide" (or "supply") or "fix" if used separately mean "provide and fix" unless explicitly stated otherwise.

1.10 MANUFACTURERS AND SUPPLIERS

Manufacturers and suppliers requirements, instructions, specifications or details are those issued by them for their particular material, product or component and are the latest edition.

1.11 REFERENCED DOCUMENTS

Reference is made to various New Zealand Building Code (NZBC) acceptable solutions (AS) and verification methods (VM) for criteria and/or methods used to establish compliance with the [Building Act 2004](#). Reference is also made to various Standards produced by Standards New Zealand (NZS, AS/NZS) and to listed Acts, Regulations and various industry codes of practice and practice guides. The latest edition (including amendments and provisional editions) at the date of this specification applies unless stated otherwise. Documents cited both directly and within other cited publications are part of this specification.

1.12 PRECEDENCE OF REFERENCED DOCUMENTS

This specification takes precedence in the event of it being at variance with and requiring a higher standard than, the cited documents. Resolution of any variance must be confirmed in writing and where Building Consent is affected, the change notified to the BCA for advice as to whether an amendment is required to the Building Consent Authority.

1.13 BUILDING CONSENT COMPLIANCE

It is an offence under the [Building Act 2004](#) to carry out any work not in accordance with the Building Consent. Refer the resolution of matters concerning compliance to the owner for a direction. Where Building Consent is affected refer any change to the BCA for advice as to whether an amendment is required to the Building Consent.

1.14 STATUTORY OBLIGATIONS

Comply with all statutory obligations and regulations of regulatory bodies controlling execution of the works.

1.15 BUILDING CONSENT

Obtain the original or copies of the Building Consent form and documents from the owner and keep on site. Liaise with the BCA and/or the building certifier for all required notices and all inspections required during construction to ensure compliance. Return the consent form and documents to the owner on completion.

1.16 INSPECTIONS

Do not proceed with work noted on the Building Consent for inspection until it has been inspected and passed by the BCA inspector.

1.17 KEY PERSONNEL

Provide names and contact detail of LBP's/ key personnel. Prior to Restricted Building Work being carried out, provide names, registrations numbers (where appropriate) and contact detail of LBP's that are required for RBW by the Building Consent Authority as part of the Building Consent.

Include the following as applicable:

- Person with the appropriate site license
- Carpenter
- Registered drainlayer
- Registered plumber
- Registered electrician
- Roofer
- Bricklayer
- External window manufacturer

1.18 PRODUCER STATEMENTS AND LBP DOCUMENTATION

When Records of Work or producer statements verifying construction are required, for the application for the Code Compliance Certificate, provide copies to both the BCA and the owner. Provide LBP documents and producer statements in the form required by the BCA.

1.19 CERTIFICATE OF COMPLIANCE

Provide Certificates of Compliance for electrical and gas work carried out.

1.20 CODE COMPLIANCE CERTIFICATE

Provide documentation that the Owner requires in order to obtain a Code Compliance Certificate for the consented work.

1.21 TRADE GUARANTEES AND WARRANTIES

Where specific trade guarantees/warranties are offered covering materials and/or execution of proprietary products or complete installations, or are required as a condition of Building Consent, provide guarantees/warranties to the owner.

1.22 SITE ACCOMMODATION

Provide, erect and maintain scaffolding, sheds, toilets, water, power and hoardings. Allow for cartage, craneage, plant hire and storage. Arrange for temporary works and services necessary for the completion of the works.

1.23 HEALTH AND SAFETY

Make the works safe and provide and maintain a safe working environment, to the requirements of the [Health and Safety at Work Act 2015](#). Ensure that all those working on or visiting the site are aware of the rules governing site safety, are properly supervised and are not unnecessarily exposed to hazards and risks.

1.24 PROTECT THE WORKS

Protect parts of the work liable to damage until completion of the works. Take all precautions necessary to protect the works from damage by unauthorised entry or inclement weather. Brace and support all parts of the works against damage during construction.

1.25 STORAGE AND PROTECTION

Provide temporary storage areas and protective covers and screens. Fillet stack and protect all framing and structural members from moisture and contamination. Completely protect finishing materials from the weather and damage and store in accordance with the manufacturer's requirements. Protect fabricated elements from the weather and damage, and store in accordance with suppliers requirements.

1.26 ANTIQUITIES AND ITEMS OF VALUE AND INTEREST

Report immediately the finding of any fossils, antiquities, pre-1900 items, or objects of value. Ensure they remain undisturbed until approval is given for their removal.

1.27 MEANS OF COMMUNICATION

All directions and approvals in writing.

1.28 WORKING HOURS

Work on site is restricted to between 0800 to 1800, Monday to Friday, excluding statutory holidays. Work outside these hours may be permitted, with prior approval in writing by the owner.

1.29 RESTRICTIONS

Do not:

- smoke on site
- light rubbish fires on the site
- bring dogs on to or near the site
- bring radios/audio players on to the site.

1.30 QUALITY ASSURANCE

Carry out and record regular checks of material quality and accuracy. Provide all necessary materials, equipment, plant, attendances, supervision, inspections and programming to ensure required standards are met.

1.31 DAMAGE AND NUISANCE

Prevent damage and nuisance from water, fire, smoke, vehicles, dust, rubbish, noise and other causes resulting from the contract works. Comply with the requirements of the TA and relevant Acts and Standards.

1.32 SET-OUT AND DATUM

Set out the works to conform with the drawings. Client to approve setout or appoint a surveyor, Establish a permanent site datum to confirm the existing ground floor level and its relationship to other existing and new building levels.

1.33 EXECUTION OF THE WORK

Conform to the requirements of this specification. Ensure work is level, plumb, and true to line and face. Employ only experienced workers familiar with the materials and techniques specified.

1.34 MATERIALS AND PRODUCTS

Use only new materials and products, unless stated otherwise, of the specified quality and complying with cited documents.

1.35 COMPATIBILITY

Ensure all parts of a construction or finish are compatible and their individual use approved by the manufacturers and suppliers of other parts of the system. Source all parts of a system from a single manufacturer or supplier.

1.36 COMPLETE ALL SERVICES

Ensure completed building services are operational, with temporary labelling removed, required labelling fixed and service instructions provided.

1.37 CLEAR AWAY

Regularly clear away trade debris, unused materials and elements from the site. On completion of the work leave the building clean and ready for occupancy, with all services operating and mechanical parts in good working order. Remove temporary markings, coverings and protective wrappings.

1.38 CLEAN

Clean and wash down external surfaces to remove dirt, debris and marking. Clean interior surfaces including floors, glass, cabinetwork, joinery, sanitary and hardware items.

1233 DOCUMENTS REFERENCED

1 GENERAL

Documents listed below are, when referred to in the text, part of this specification. However, this specification takes precedence in the event of it being at variance with and requiring a higher standard than any cited document.

The latest edition of the cited document (including amendments and provisional editions) at the date of this specification applies unless stated otherwise.

1.1 ACTS AND REGULATIONS

[Building Act 2004](#)

[Gas \(Safety and Measurement\) Regulations 2010](#)

[Health and Safety at Work Act 2015](#)

[Health and Safety at Work \(Asbestos\) Regulations 2016](#)

[Electricity \(Safety\) Regulations 2010](#) (Reprint as at 4 April 2016)

[Plumbers, Gasfitters and Drainlayers Act 2006](#)

1.2 NEW ZEALAND BUILDING CODE VERIFICATION METHODS

[NZBC E2/VM1](#) External moisture

[NZBC G12/VM1](#) Water supplies

1.3 NEW ZEALAND BUILDING CODE ACCEPTABLE SOLUTIONS

[NZBC B1/AS1](#) Structure - general

[NZBC B2/AS1](#) Durability

[NZBC C/AS1-AS7](#) Protection from fire

[NZBC D1/AS1](#) Access routes

[NZBC E1/AS1](#) Surface water

[NZBC E2/AS1](#) External moisture

[NZBC E2/AS3](#) External moisture

[NZBC F2/AS1](#) Hazardous building materials

[NZBC F7/AS1](#) Domestic smoke alarms

[NZBC G1/AS1](#) Personal hygiene

[NZBC G10/AS1](#) Piped services - Gas

[NZBC G11/AS1](#) Gas as an energy source

[NZBC G12/AS1](#) Water supplies

[NZBC G13/AS2](#) Foul water - Drainage

1.4 NEW ZEALAND STANDARDS

AS/NZS 1604.3	Specification for preservative treatment - Plywood
NZS/AS 1884	Floor coverings - Resilient sheet and tiles - Installation practices
AS/NZS 2269.0	Plywood - Structural - Specifications
AS/NZS 2455.1	Textile floor coverings - Installation practice - General
AS/NZS 2455.2	Textile floor coverings - installation practice - Carpet tiles
AS/NZS 2589	Gypsum linings - Application and finishing
AS/NZS 2642.2	Polybutylene pipe systems - Polybutylene pipe for hot and cold water applications
AS/NZS 2699.1	Built-in components for masonry construction Wall ties
AS/NZS 3000	Electrical installations (known as the Australian/NZ Wiring Rules)
NZS 3101.1	Concrete structures standard
NZS 3103	Sands for mortars and plasters
NZS 3104	Specification for concrete production
NZS 3109	Concrete construction
NZS 3114	Concrete surface finishes
AS/NZS 3500.2:2015	Plumbing and drainage - Sanitary plumbing and drainage
NZS 3501	Specification for copper tubes for water, gas and sanitation
NZS 3602	Timber and wood-based products for use in building
NZS 3603	Timber structures standard
NZS 3604	Timber-framed buildings
NZS 3622	Verification of timber properties
NZS 3631	New Zealand national timber grading rules
AS/NZS 4130:2009	Polyethylene (PE) pipes for pressure applications
NZS 4210	Masonry construction materials and workmanship
NZS 4211	Specification for the performance of windows
NZS 4218	Thermal insulation - Housing and small buildings
NZS 4223.1	Glazing in buildings - Glass selection and glazing
NZS 4223.2	Glazing in buildings - Insulating glass units
NZS 4223.3	Glazing in buildings - Human impact safety requirements
NZS 4223.4	Glazing in buildings - Wind, dead, snow and live actions
NZS 4229	Concrete masonry buildings not requiring specific engineering design
NZS 4246	Energy efficiency - Installing bulk thermal insulation in residential buildings
NZS 4251.1	Solid plastering - Cement plasters for walls, ceilings and soffits
AS/NZS 4666	Insulating glass units
AS/NZS 4671	Steel reinforcing materials
AS/NZS 4858	Wet area membranes
AS/NZS 5601.1	Gas installations - general installations
NZS 6803	Acoustics - Construction noise

1.5 BUILDING RESEARCH ASSOCIATION OF NEW ZEALAND (BRANZ)

Weathertight Solutions Vol. 2: Stucco
 Good practice guide: Tiling
 Good practice guide: Membrane roofing
 Bulletin 441 - Sealed joints in external claddings - 2. Sealants
 Bulletin 519 - Fasteners selection

1.6 OTHER DOCUMENTS

Cement & Concrete Association of New Zealand

- [CCANZ CP 01](#): Code of practice for weathertight concrete and concrete masonry construction

WorkSafe New Zealand (OSH)

- [Good Practice Guidelines - Excavation Safety](#)
- [Repainting lead based paints](#)
- [Management and Removal of Asbestos \(Approved CoP\)](#)

Waterproofing Membrane Association Inc.

- [WMAI CoPTM](#): Code of practice for torch-on membrane systems for roofs and decks

New Zealand Demolition and Asbestos Association (NZDAA)

- [Best Practice Guideline for Demolition in New Zealand](#).

New Zealand Metal Roofing Manufacturers Inc

- [NZMRM COP](#): NZ Metal roof and wall cladding: Code of practice

Window & Glass Association NZ (WGANZ)

- [PQAS](#): Powder Coating Quality Assurance System
- [Window Installation Guide](#): Guide to Window Installation as described in E2/AS1 Amendment 7.

2200 GROUNDWORKS & PREPARATION

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out work using persons competent and experienced in the trade.

1.2 SITE SAFETY

Provide proper support for excavations. Cover holes and fence off open trenches and banks.

2 PRODUCTS

2.1 FILLING MATERIALS

Volcanic tuff:	Scoriaceous tuff of variable grading excluding silt or clay material, capable of being placed and compacted as specified.
Rock fill:	Hard material comprising rock, broken stone, hard brick, concrete, run of pit scoria, or other comparable inert material capable of being placed and compacted as specified.
Sand fill:	Clean sand of such grading in particle size as to allow for mechanical compaction to 90% maximum density.
Hardcore:	Scoria or crushed rock to GAP (General All Passing) 40 grading.
Granular base:	Screened crushed gravel or scoria graded in size from 20mm to 7mm, clean. When tested with a standard sieve of 4.75 opening no material is to pass.
Dressing course:	Scoria to GAP 20 grading, or "dirty footpath scoria", or equivalent "all in" graded crushed metal aggregate.
Free-draining aggregate:	Scoria or crushed gravel graded 50 to 14 clean.

3 EXECUTION

3.1 EXCAVATION GUIDELINES

Carry out excavation to the guidelines set in WorkSafe NZ, [Good Practice Guidelines - Excavation Safety](#).

3.2 PROTECT EXISTING

Protect from damage existing buildings, structures, roads, paving and services nominated on the drawings as being retained, throughout the course of the work.

3.3 SURFACE PREPARATION

To [NZS 3604](#), 3.5 **Site preparation**, remove all turf, vegetation, trees, topsoil, stumps and rubbish from the area being built on.

3.4 UNDERGROUND ELEMENTS AND SERVICES

Break out and remove underground elements and redundant services. Report for instructions when unexpected voids, made-up ground or services are encountered. Seal off the ends of drains or remove to NUO approval.

3.5 STOCKPILE TOPSOIL

Stockpile excavated topsoil on site where directed. Keep separate from other excavated materials. Spread and level where directed before completion of the works.

3.6 GENERAL EXCAVATION

Trim ground to required profiles, batters, falls and levels. Remove loose material. Protect cut faces from collapse. Keep excavations free from water.

3.7 EXCAVATION FOR FOUNDATIONS

Take foundation excavations to depths shown. Keep trenches plumb and straight, bottoms level and solid, stepped as detailed and clean and free of water.

3.8 INADEQUATE BEARING

If bearing is inadequate then excavate further and backfill with material as follows:

Slabs on grade:	Hardfill
Footings:	10 MPa concrete
Service trenches:	Hardfill

If excavation exceeds the required depths, backfill and compact to the correct level with listed material.

3.9 GRANULAR BASE FOR SLABS

To [NZS 3604](#), 7.5.3 **Granular base**. Consolidate with a vibrating roller. Blind the surface with coarse sand or sand/cement and roll ready to receive a damp-proof membrane.

3.10 GENERAL BACKFILLING

Compact backfilling in 150mm layers, with the last 200mm in clean topsoil, lightly compacted and neatly finished off.

3110 CONCRETE WORK

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out work using persons competent and experienced in the trade. Structural and foundation work to be carried out by or supervised by the appropriate LBP.

2 PRODUCTS

2.1 REINFORCEMENT

Refer to Architectural Drawings, Firth RibRaft Floor System Section 2: Installation Information and Section 3: Verification

2.2 MESH FOR SLABS

665 mesh reinforcing. Refer to Firth RibRaft Floor System Section 2: Installation Information and Section 3: Verification

2.3 SPACERS AND CHAIRS

Use Firth purpose made moulded PVC spacers and chairs.

2.4 CONCRETE

Strength as selected. Firth Raftmix or Raftmix Pump.

3 EXECUTION

3.1 HANDLE AND STORE REINFORCING

Handle and store reinforcing steel and accessories without damage or contamination. Ensure reinforcement is clean and remains clean and free of contamination that may reduce bonding capacity.

3.2 FALSEWORK AND FORMWORK

Use falsework and formwork of sufficient strength to retain and support the wet concrete to the required profiles and tolerances. Select formwork finish to produce the specified finished quality.

3.3 CUT AND BEND

Cut and bend bars using proper bending tools to avoid notching and to the requirements of [NZS 3109](#). Do not rebend bars without written approval. Bend main reinforcing bars, stirrups and ties to the former pin diameters as given in [NZS 3109](#), figure 3.1, **Standard bend, hook and stirrup**.

3.4 SECURE REINFORCEMENT

Secure reinforcement adequately with tying wire and place, support and secure against displacement when concreting. Bend tying wire back well clear of the formwork. Spacing as dimensioned, or if not shown, to the clear distance minimums laid down in [NZS 3109](#), 3.3. **Hooks and bends**.

3.5 LAPPED SPLICES

Refer to Firth RibRaft Floor System Section 2: Installation Information and Section 3: Verification

3.6 MESH LAPS FOR SLABS

For slabs on ground, mesh to be lapped and tied, so the outermost wires overlap by the greater of: 225mm minimum to Firth RibRaft Floor System requirements. Do not count bar extensions beyond the outermost cross wire.

3.7 REINFORCEMENT COVER

Minimum cover to all reinforcing bars, stirrups, ties and spirals, as shown on drawings. Where cover is not shown on drawings provide minimum cover to [NZS 3604](#) requirements.

3.8 CONCRETE PLACEMENT

To comply with [NZS 3109:1997, Clause 7](#). Refer to Firth RibRaft Floor System Section 2: Installation Information and Section 3: Verification

3.9 SURFACE FINISHES

To comply with [NZS 3114:1987](#), section 105 **Specification of finishes**, or as denoted on the drawings. Formwork linings and surface finishes as nominated for both fair face and concealed or exposed surfaces. Surface tolerances to comply with [NZS 3114](#), section 104 **Surface tolerances** and 105.3.2.

3.10 DAMP-PROOF MEMBRANE

Apply membrane to prepared basecourse with 150mm laps between sheets. Tape seal laps and penetrations with 50mm wide pressure sensitive plastic tape. Refer to drawings for perimeter details.

3.11 CASTING IN

Build in grounds, bolts and fixings for wall plates and bracing elements, holding down bolts, pipes, sleeves and fixings as required. Form pockets, chases and flashing grooves as required. No grounds exceeding 100mm in length. Minimum cover on conduits 40mm. Do not encase aluminium items in concrete. Do not paint steel embedded items more than 25mm into the concrete encasement. Cut back form ties to specified cover and fill the cavities with mortar. Wrap all pipes embedded in concrete with tape to break the bond and to allow for expansion.

3.12 FLOOR SLABS

Construct to Firth RibRaft Floor System Section 2: Installation Information and Section 3: Verification Lay to true and straight surfaces, screeded, floated and steel (manual or power) trowelled finish. Tolerance on flatness: maximum 3mm gradual deviation over a 3 metre straight-edge, to [NZS 3114](#), 304, **Surface tolerances**.

3.13 SAW CUTS

Cut slabs where indicated on the drawings as required to control shrinkage cracking. Form by saw cutting the slab (blade width approximately 5 mm) to a depth of 25mm after it has hardened (saw cutting shall take place no later than 24 hours after initial set for average ambient temperatures above 20 °C, and 48 hours for average ambient temperatures below 20 °C). For saw cuts filled with sealant, increase width of cut to suit sealant.

3.14 SURFACE REPAIRS

Make good surface defects as soon as forms are stripped. Make good hollows or bony areas with 1:2 mortar, finished to the same tolerances as the parent concrete. Fill tie rod holes with 1:2 mortar.

3.15 CURING OF CONCRETE

Keep damp for not less than seven days. Ensure curing of slabs commences as soon as possible after final finishing, by the use of continuous water sprays, or ponding. Alternately, apply a curing membrane. Ensure any membrane used will not affect subsequent applied finishes.

3.16 STRIKE FORMWORK

Strike formwork without damaging or overloading structure.

3.17 CLEAN OUT

Clean out saw cuts. Fill with cement grout where the floor will be covered with carpet or vinyl.

3800 TIMBER FRAMING

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

Use experienced competent carpenter familiar with the materials and techniques specified. Work to be carried out by or supervised by the appropriate LBP.

2 PRODUCTS

2.1 TIMBER FRAMING GENERALLY

Species, grade and level of treatment to [NZBC B2/AS1](#), [NZS 3602](#), tables 1 to 3 **Requirements for wood-based building components** ..., and moisture content to [NZS 3602](#), table 4 **Allowable moisture content** Structural Grade (SG) to [NZS 3604](#), [NZS 3622](#) with properties to [NZS 3603](#).

2.2 TIMBER TRUSSES

To FTMA Code of Practice. Moisture content 16% at supply.

2.3 ACCESSORIES

Damp-proof course:	High impact embossed polyethylene
Stud straps	Polypropylene tape run horizontal at 300mm centres over flexible wall underlay, for drained cavities with stud spacings greater than 450mm.
Nails, bolts and screws:	Steel, stainless steel, galvanized steel of pattern to suit the location and to BRANZ BU 519: Fasteners selection. To NZS 3604 , 4 Durability and NZBC E2/AS1 .
Nail plates connectors:	Stainless steel and/or galvanized steel toothed or nailed plates to the plate manufacturer's design for the particular locations as shown on the drawings and to NZS 3604 , 4 Durability . Galvanized steel and stainless steel connectors and brackets to the connector manufacturer's design for locations shown on drawings and to NZS 3604 , 4 Durability and NZBC E2/AS1
Corrosion risk	For exterior timber, timber in damp areas and timber subject to occasional wetting, use only stainless steel (or equivalent) fixings and connectors, when the timber is treated with; Copper Azole (CuAz, Preservative code 58), Alkaline Copper Quaternary (ACQ, Preservative code 90), Micronise Copper Azole (code 88) or Micronised Copper Quaternary (code 89). For interior timber, treated with copper-based timber preservatives (H3.2 or higher), use a minimum of hot-dipped galvanized steel fixings and fasteners.

3 EXECUTION

3.1 ATTENDANCE

Provide and fix blocks, nogs, openings and other items as required by others.

3.2 MOISTURE CONTENT

Maximum allowable moisture content to [NZS 3602](#), table 4 **Allowable moisture content...**, for framing supporting interior linings:

Framing at erection	24%
Framing at enclosure	20%
Framing at lining	16%

3.3 EXECUTION GENERALLY

To [NZS 3604](#) except as varied in this specification. To include those methods, practices and processes contained in the unit standards for the National Certificate in Carpentry and the National Certificate in Joinery (cabinetry, exterior joinery, stairs). When necessary provide framing to suit any required cladding/lining control joints. Set out framing in accordance with the requirements of [NZS 3604](#) and as required to support sheet linings and claddings.

3.4 INSTALL FLOOR, WALL AND ROOF FRAMING

Floors and bottom plates framed and fastened to [NZS 3604](#), 7 **Floors**. Frame walls to required loading and bracing complete with lintels, sills and nogs, all fabricated and fastened to [NZS 3604](#), 8 **Walls**. Frame roof to required loading and bracing complete with valley boards, ridge boards and purlins to [NZS 3604](#), 10 **Roof framing**. Design and fit roof trusses complete with anchorage. All fabricated and fastened to [NZS 3604](#), 9 **Posts**, and [NZS 3604](#), 10 **Roof framing**.

3.5 BATTENS

For drained cavity construction nominal 20mm H3.1 cavity battens (non-structural) to [NZBC E2/AS1](#), 9.1.8.4 **Cavity battens**. For direct fix cladding window and door openings nominal 20mm H3.1 jamb battens to [NZBC E2/AS1](#), Fig. 72A.

4261 BRICK VENEER

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out brickwork with persons competent and experienced in the trade. Work to be carried out by or supervised by the appropriate LBP.

2 PRODUCTS

2.1 ACCESSORIES

Lintels:	Fit angle lintels to openings, sized to NZBC E2/AS1, 9.2.9, Openings in masonry veneer Table 18E and placed to NZBC E2/AS1, 9.2.9, Openings in masonry veneer .
Vermin stop:	Galvanized steel wire netting strip with reinforced edges and galvanized staples for fixing.
Damp-proofing:	Heavy kraft strip laminates saturated and coated with bitumen, heavy duty polyethylene or bituminous brush-applied liquid membrane to suit location and detail.
Ties:	To AS/NZS 2699.1 , Veneer ties screw fixed to framing.
Sand for mortar:	To NZS 3103 . Chloride levels to not exceed 0.04% by dry weight of sand.

2.2 MORTAR

Composed of Portland cement, sand and water with an admixture to the provisions of [NZS 4210](#), 2.2 **Mortar**. Obtain written approval if intending to use cement mortar as a damp-proof course and where or if intending to use hydrated lime in the mortar.

3 EXECUTION

3.1 STORAGE

Store bricks and other materials clear of the ground, under cover and well ventilated until placed in the work.

3.2 VENEER WORK GENERALLY

Comply with [NZS 4229](#), [SNZ HB 4236](#) and [NZS 4210](#), section 2.9 **Veneer and cavity wall construction**.

3.3 LAYING GENERALLY

To [NZS 4210](#). Ensure bricks are dry when laid. Use bricks equally off all pallets as work proceeds. Distribute facing bricks of varying colour randomly throughout so no patches or striping appears.

3.4 BOND

Stretcher bond, single width unless detailed or stated otherwise.

3.5 INSTALLING WALL TIES

Screw fix to face of studs without otherwise piercing or damaging the wall underlay. Ties placed, spaced and installed to [NZS 4210](#), and [NZBC E2/AS1, 9.2.7, Wall ties](#), Tables 18A, 18B and 18C, screw fixings to Table 18C.

3.6 MORTARING

To maximum practical density. Mortar fully laid, firmly placed, correctly cured and not re-tempered. Discard any mortar not used within 11/2 hours of mixing. Joint thickness 10mm plus or minus 2mm.

3.7 RAKE OUT

Rake out joints as work proceeds, for pointing as detailed. Maximum depth of rake 6mm.

3.8 POINTING

Joints tooled concave after initial stiffening.

3.9 WEEPHOLES

Rake out every third perpend where weep holes are required, and vent veneer to [NZS 4210](#), 12.4 **Cavities** and [NZBC E2/AS1](#), 9.2.6, **Cavities**.

3.10 CO-ORDINATE

Co-ordinate the building-in of exterior joinery and items required for fitting as the work proceeds. Rake out for or build in flashings as required.

3.11 KEEP CAVITY AND TIES CLEAR

Keep cavity and ties clear of mortar droppings and clean the brickwork face of any marking as the work proceeds. Repair damage to wall underlay immediately it occurs.

3.12 BASE OF CAVITY

Flaunch base of cavity to provide stepped rebates supporting brick veneer and damp-proof, to E2/AS1, 9.2.5, **Foundation support and damp-proofing**.

3.13 CLEAN DOWN

Clean down brickwork to remove stains. Remove efflorescence with a stiff bristle broom, blot with a damp sponge and wash walls with a plentiful supply of clean water during fine weather.

4310 ROOFING

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Use experienced competent roofers familiar with the materials and techniques specified. Work to be carried out by or supervised by the appropriate LBP.

1.2 WIND AND EARTHQUAKE LOADINGS

Use fixings and methods capable of sustaining the loads appropriate to the area as set out in [NZS 3604](#), section 5 **Bracing design**, and confirmed under 1212 COMPLIANCE.

2 PRODUCTS

2.1 METAL TILES

Profile, metal and finish as selected. Accessories, cappings, flashings, and fixings to match and to the roofing manufacturer's requirements.

2.2 ACCESSORIES

Tile battens:	Douglas fir or radiata pine, SG6, treated H1.2, size, spacing and fixing to NZS 3604 , table 10.12, Tile battens for all wind zones .
Roof underlays:	As selected.
Nails, screws, fastenings:	Metal, size and pattern, to roofing manufacturer's requirements and complying with the relevant aspects of NZS 3604 , section 4 Durability and NZBC E2/AS1 .
Flashings:	As required.

3 EXECUTION

3.1 STORAGE

Stack roofing and accessories on clean, level areas of the site. Cover and protect from damage and from weather until ready to fix in place.

3.2 SET-OUT

Set out the planned layout before fixing commences, to ensure true lines and the correct relationship to module, grid and roof features. Overlaps to face away from prevailing wind direction.

3.3 LAY ROOF UNDERLAY

Lay and fix to [NZBC E2/AS1](#), 8.1.5 **Roof Underlays**.

3.4 TAKE CARE

Take care to avoid damaging pre-finished roofing both during and after fixing. Mark only with chalk or spirit-based pen. Wear only soft-soled shoes on the finished surface. Remove metal filings daily.

3.5 INSTALL TILE BATTENS

Install to the roofing manufacturer's requirements, with joints fully supported and staggered.

3.6 INSTALL METAL TILES

Cut with tools specified by the roofing manufacturer. Fold ends and seal cut edges of tiles and accessories without damaging their integrity or finish, all to the roofing manufacturer's requirements. Lap metal tiles and fix complete with matching accessories, flashed to roof features and penetrations; all to the roofing manufacturer's requirements.

3.7 FIXINGS AND SEALANTS

Refer to the roofing manufacturer's literature for fixing details and to [NZS 3604](#) for fixings durability requirements. Select and use sealants only as recommended by the roofing manufacturer.

3.8 INSTALL COVERS AND FLASHINGS

Provide apron, verge and ridge flashings. Install and fix as detailed and to the roofing manufacturer's details and to comply with [NZBC E2/AS1, 4.0 Flashings](#), [NZBC E2/AS1: 5.0 Roof/wall junctions](#), and [NZBC E2/AS1: 6.0 Parapets](#).

3.9 PENETRATIONS

Flash and overflash penetrations through the roof. Fit proprietary boots to pipework penetrations.

3.10 COMPLETE

Ensure the work is complete with flashings, undercloaks, valleys, ridges and hips properly installed so the finished roof is completely weathertight.

3.11 CLEAR

Clear trade debris and unused materials from the roof and surrounds regularly during the work and at completion. Sweep down the completed roof and flush out spoutings, gutters and rainwater pipes.

4520 ALUMINIUM WINDOWS & DOORS

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Fabricators/Installers to be experienced, competent trades people familiar with the materials and techniques specified.

1.2 CERTIFICATION

Provide documentation that the windows and doors comply with [NZS 4211](#) and safety glass complies with [NZS 4223.3](#).

1.3 WIND LOADINGS

Refer to section 1212 COMPLIANCE for wind zone.

2 PRODUCTS

2.1 WINDOW AND DOOR REVEALS

As selected, manufactured to comply with [NZS 4211](#). Timber jamb liners to [NZS 3602](#).

2.2 FLASHINGS

To [NZBC E2/AS1](#), 9.1.10 **Windows and Doors** and as required.

2.3 POWDER COATING FINISH

To Window & Glass Association NZ: Powder Coating Quality Assurance System. All finished surfaces to show uniformity of gloss and colour (to match sample) free of all coating defects.

2.4 SEALANT, GLAZING TAPE AND GASKETS

To the window manufacturer's requirements.

2.5 FIXINGS

Ensure fixings and bracketing are compatible with aluminium. Do not use electroplated zinc fasteners or brass fastenings.

3 EXECUTION

3.1 OPENING PREPARATION

Confirm framing openings (including jamb battens for direct fix cladding) on site for dimension, plumb and straightness prior to fabrication or ordering of aluminium joinery. Prepare and trim to Window & Glass Association NZ: Guide to Window Installation requirements. For openings over 600mm wide on cavity construction provide sill support bars.

3.2 EXECUTION GENERALLY

To [NZBC E2/VM1](#) and [NZBC E2/AS1](#). Install to the Window & Glass Association NZ: Guide to Window Installation requirements.

3.3 HANDLING

Avoid distortion of elements during transit, handling and storage. Prevent pre-finished surfaces from rubbing together. Prevent contact with mud, plaster and cement. Do not deliver to site any elements which cannot be immediately unloaded into suitable conditions of storage.

3.4 CORROSION PROTECTION

Seal or suitably coat cut ends and holes drilled in aluminium before the frames are installed. Before fixing, apply bituminous coatings, slips or underlays between dissimilar metals in contact, or aluminium in contact with concrete.

3.5 FIX FRAMES

Fix frames rigidly in place without distortion, to the window manufacturer's requirements and to [NZBC E2/AS1](#), 9.1.10.8, **Attachments for windows and doors**, plumb, true to line and face, weathertight and with all openings operating freely.

3.6 DRAINAGE

Anti-condensation channels to sills. All sills to sashes and fixed lights to incorporate positive drainage to the exterior.

3.7 GLAZING INSTALLATION

All glass held in aluminium beads and black PVC gaskets.

3.8 SAFETY GLASS INSTALLATION

Use in doors, sidelight panels, low level windows and all other locations to comply with [NZS 4223.3](#).

3.9 INSTALL FLASHINGS

Install flashings to heads, jambs and sills of frames as supplied and required by the window manufacturer and as detailed on the drawings. Finish on head flashings to match window finish.

3.10 SEAL FRAMES ON SITE

Seal frames to each other and to adjoining structure and finishes, all as required by the window manufacturer and to make the installation weathertight. Provide a continuous internal air seal between reveals and framing, using sealant over a backing rod.

3.11 SAFETY

Indicate the presence of transparent glasses for the remainder of the contract period, with whiting, tape or signs compatible with the glass type. Indicators other than whiting must not be applied to the glass surface. Permanent manifestations, if required, to [NZS 4223.3](#), 2.2 Manifestation (making glass visible).

3.12 CLEAN GLASS AND FRAMES

Clean off or remove glass indicators at completion of the building. Clean glass inside and out to a shining finish. Clean down both sides of window and door frames using the methods required by the window and door manufacturer.

4610 GLAZING

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Glaziers to be experienced, competent trades people familiar with the materials and techniques specified.

1.2 CERTIFICATION

If not supplied with windows, provide documentation that the safety glass complies with [NZS 4223.3](#).

2 PRODUCTS

2.1 GLAZING TAPE

Pressure sensitive, self-adhesive vinyl foam tapes, selected to suit the glazing detail.

2.2 GLASS THICKNESS

As selected and to [NZS 4223.1](#), [NZS 4223.3](#), [NZS 4223.4](#).

2.3 FLOAT GLASS

Clear ordinary annealed glass for general window glazing. Thickness as required by [NZS 4223.1](#).

2.4 TOUGHENED GLASS

To [NZS 4223.3](#).

Heat soaked toughened glass to [NZS 4223.1](#), Appendix E required for critical areas (balustrades etc) to reduce inclusion failure.

2.5 INSULATED GLASS UNITS

As selected and to [AS/NZS 4666](#). and [NZS 4223.2](#)

2.6 SETTING BLOCKS

Neoprene, 80-90 Shore A hardness, set at quarter points or to detail, at the base of glass panes.

3 EXECUTION

3.1 EXECUTION GENERALLY

To [NZS 4223.1](#), and for human impact safety glazing to [NZS 4223.3](#). Insulating glass units to [AS/NZS 4666](#) and [NZS 4223.2](#).

3.2 INSTALL GLASS TO ALUMINIUM FRAMES

Install glass to [NZS4223.1](#).

- Bead glaze to Section 4 Glazing.
- Channel glaze to Section 4 Glazing, and Section 5 for Framed, Unframed, Partly Framed Glass Assemblies.

3.3 SAFETY GLASS INSTALLATION

Use in doors, sidelight panels, low level windows, bathrooms and all other locations to comply with [NZS 4223.3](#).

3.4 SAFETY

Indicate the presence of transparent glasses, with whiting, tape or signs compatible with the glass type. Do not apply indicators other than whiting to the glass surface. Permanent manifestations if required, to comply with [NZS 4223.3](#), 2.2 Manifestation (making glass visible).

3.5 CLEAN

Clean off or remove indicators at completion of the building. Clean glass inside and out to a shining finish.

4710 THERMAL INSULATION

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Installers to be experienced, competent trades people familiar with the materials and techniques specified.

2 PRODUCTS

2.1 THERMAL INSULATING BLANKET

Roll form insulation blanket manufactured from fibreglass or polyester.

3 EXECUTION

3.1 INSTALL INSULATION - GENERAL

Lay, install, fit and fix to [NZBC H1/AS1](#): Energy efficiency, 2.0 Building thermal envelope, and to the insulation manufacturer's requirements. Install in housing to [NZS 4218](#) and [NZS 4246](#).

3.2 FIT THERMAL INSULATING BLANKET

Install in ceiling/roof cavity and mid-floor cavity where specified. Slightly oversize length for friction fit and tear by hand across pad and fill cavity. Tear to smaller pieces for smaller spaces and around penetrations. Leave no gaps between, and maintain full thickness of the insulating segments over the whole of the installation. Do not cover vents.

3.3 GAPS AROUND RECESSED LIGHTS AND FLUES

New recessed light fittings to [AS/NZS 3000](#), must be types IC-F, IC, CA-80 or CA-135 and do not require clearance from most, fibre glass, polyester or wool insulation. For all other insulation types and lighting types, or existing undefined types, allow clearance from the insulation of 100mm clear gap to incandescent or halogen lights, or as recommended by the lighting manufacturer. Around metal flues allow 200mm minimum clear gap or as recommended by the fireplace/flue manufacturer.

5110 INTERIOR LININGS & TRIM

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 FRAMING MOISTURE CONTENT

Maximum allowable moisture content to [NZS 3602](#), table 4 **Allowable moisture content...**

1.2 PROTECT

Protect joinery, fittings and finishes already in place from water staining or damage from lining installation. Ensure building is weatherproof before lining work commences.

2 PRODUCTS

2.1 PLASTERBOARD

Gypsum plaster core encased in a durable face and backing paper formed for standard use, bracing use, fire rated use and water resistance use.

2.2 PLASTERBOARD ACCESSORIES

External angles:	Slim type 0.5mm galvanized steel.
Casing bead:	Slim type 0.5mm galvanized steel or PVC.
Cornice:	Plasterboard scotia type.
Nails:	Galvanized clouts 40mm x 2.5mm.
Screws:	40mm x 6 gauge zinc electro-plated bugle head gypsum drywall screws
Jointing compound & paper tape:	To the board manufacturer's requirements.
Adhesive:	Multi-purpose water based wallboard adhesive.

2.3 NAILS

Zinc-plated steel, stainless steel and galvanized steel of pattern to suit location and to BRANZ BU 519: **Fasteners selection**.

2.4 INTERIOR FINISHING TRIM

Timber selection to [NZS 3602](#), table 3 **Requirements for wood-based building components....** Profile as selected or to match existing. Jointer profiles to suit location.

3 EXECUTION

3.1 SUBSTRATE

To [NZS 3604](#), section 8 **Walls**, section 10 **Roof framing**, section 12 **Interior linings**, section 13 **Ceilings**, and the standard required by the lining manufacturer's requirements. Ensure moisture content of timber framing is at or below specified levels.

3.2 CONFIRM LEVELS OF PLASTERBOARD FINISH

Before commencing work, confirm the surface finish assessment procedures necessary to ensure the specified levels of finish will be obtained. Provide levels of finish as laid down in [AS/NZS 2589](#).

3.3 LINE PLASTERBOARD CEILINGS AND WALLS

Line walls and ceilings with plasterboard sheets, fastened to the plasterboard manufacturer's requirements.

3.4 SPECIAL PLASTERBOARD LININGS

Line wet area walls with water resistant plasterboard sheets using adhesive and nail fixing to studs at centres to suit the surface finish. Form bracing panels using high density plasterboard sheets fixed with clout-washers and clouts and to conform to [NZS 3604](#), 5.4 **Wall bracing design**, and 13.5 **Structural ceiling diaphragms**. Form sound rated panels following the sheet manufacturer's specifications and details for the required sound rating. Form fire rated panels following the sheet manufacturer's specifications and details for the required fire rating.

3.5 FIX PLASTERBOARD EXTERNAL ANGLES

Fix full length to external corners, with clouts at 100mm each side staggered.

3.6 PLASTERBOARD JOINTING AND STOPPING

Fill joint recess with bedding compound, centre the paper tape, apply second coat of bedding compound followed by a coat of finishing compound. Allow to dry and lightly sand off. Fill nail holes and flush up external angles with two successive coats of bedding compound followed by a coat of finishing compound. Allow to dry and lightly sand off. All to the plasterboard manufacturer's requirements.

3.7 LEVELS OF FINISH

Provide levels of finish to standards laid down by [AS/NZS 2589](#) as follows:

Level 4: For thin coating finishes (paint) and surfaces receiving light texture or wall covering finishes

Level 5: Where specifically detailed for surfaces receiving thin coating finishes (paint).

3.8 INSTALL TRIM

Scribe and fit reveal linings to exterior timber joinery, architraves to interior joinery, skirtings to walls and timber beads to wall/ceiling junctions, and other trim as detailed.

5230 INTERIOR DOORS & FRAMES

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Trades people qualified or experienced in those methods, practices and processes contained in the unit standards for the National Certificate in Carpentry and the National Certificate in Joinery (cabinetry, exterior joinery, and stairs).

2 PRODUCTS

2.1 DOORS GENERALLY

As selected.

2.2 INTERIOR CAVITY SLIDERS

Hollow core door within a proprietary cavity slider frame, with brand-matched sliding door gear.

2.3 INTERNAL JOINERY FRAMES

Fabricate as detailed.

2.4 DOOR HINGES

Type:	loose-pin zinc-plated steel
Size:	89mm
Material:	zinc-plated steel
Number:	3 hinges per door

2.5 INTERIOR SLIDING DOOR GEAR

To suit door size and weight and as detailed.

2.6 DOOR HARDWARE

As selected.

2.7 NAILS

Zinc-plated steel, stainless steel and galvanized steel of pattern to suit location and to BRANZ BU 519: **Fasteners selection**.

3 EXECUTION

3.1 PROTECT

Protect joinery, fittings and finishes already in place from water staining or damage from lining installation. Ensure building is weatherproof before lining work commences.

3.2 FIT INTERNAL JOINERY FRAMES

Wedge and rigidly fix in place without distortion, plumb, and true to line and face.

3.3 INTERNAL CAVITY SLIDERS

Install in accordance with the door manufacturer's requirements.

3.4 FIT HARDWARE

Fit hardware selected and provided, all in accordance with the hardware manufacturer's requirements.

3.5 CHECK

Check and adjust operation of doors sets, hardware and furniture.

6300 FLOOR COVERING

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Use flooring trades people appropriately experienced with the materials and techniques specified.

2 PRODUCTS

2.1 ADHESIVES COMPATIBILITY

Use only compatible adhesives approved by the respective manufacturers.

2.2 RESILIENT FLOOR COVERING

Includes vinyl, linoleum or rubber, either sheet or tile

2.3 ACCESSORIES - RESILIENT FLOOR COVERING

Primer and sealers:	To the adhesive manufacturer's requirements for the particular substrate.
Adhesive:	To the manufacturer's requirements.
Trims and edging:	As supplied by the manufacturer to complete the work.

2.4 CARPET

Textile floor coverings to, [AS/NZS 2455.1](#) for broadloom or [AS/NZS 2455.2](#) for tiles.

2.5 ACCESSORIES - CARPET

Underlay:	To AS/NZS 2455.1 Soft underlay and underlays manufacturer's requirements.
Adhesives:	To the manufacturer's requirements.
Edge grippers:	To the manufacturer's requirements.
Tape:	To the manufacturer's requirements.
Trims and edging:	Binder bars, divider strips and nosings to complete the work.

3 EXECUTION

3.1 HANDLING AND STORAGE

Maintain materials and accessories undamaged and dry. Store any rolls and other material to manufacturers requirements, on level surfaces, in non-work areas that are enclosed, clean and dry. Avoid distortion, marking and damage to edges while shifting and handling materials and accessories. Do not use faulty or damaged material.

3.2 SUBSTRATE

Ensure the building is enclosed, wet work complete, finishes and trim complete, and good lighting available. Inspect the substrate to ensure it is of the standard required for work in this section.

3.3 TEMPERATURE

Acclimatize flooring to a room temperature above 16°C to manufacturer's requirements. In air-conditioned buildings run air-conditioning to flooring manufacturer's requirements. Turn off floor heating for at least 48 hours before and after laying.

3.4 LAYOUT

Before beginning the installation confirm the proposed layout of material, location of joins and other visual considerations of the finished work.

3.5 SURFACE PREPARATION - RESILIENT FLOORING

To [NZS/AS 1884](#) including necessary repairs and sealing. Check for moisture content to [NZS/AS 1884](#), Appendix A, and do not commence final sanding or laying until readings for the whole area show a maximum moisture content of, 75% RH for concrete, 14% for timber or 12% for timber with air conditioning. Clean surface.

3.6 SURFACE PREPARATION - CARPET

To [AS/NZS 2455.1](#), section 2. including necessary repairs and sealing. Check for moisture content to [AS/NZS 2455.1](#), Appendix B, and do not commence laying until readings for the whole area show a maximum moisture content of, 75% RH for concrete, 14% for timber or 12% for timber with air conditioning. Clean surface.

3.7 RESILIENT FLOOR LAYING

Carry out the whole of the work to [NZS/AS 1884](#), and the flooring manufacturer's requirements.

3.8 RESILIENT FLOOR JOINTING

Provide the joints/seams described in 1213 SELECTIONS or the drawings, to [NZS/AS 1884](#), and the flooring manufacturer's requirements.

3.9 CARPET INSTALLATION, CONVENTIONAL SYSTEM

Install underlay to manufacturer's requirements, and lay at right angles to the carpet direction. Tape carpet joints, fix grippers to floor and install underlay and carpet to [AS/NZS 2455.1](#), section 3. Stretch carpet tight in both width and length evenly without bowing, square with walls. Fix trim.

3.10 CLEAN

Upon completion clean to manufacturer's requirements.

6700 PAINTING

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out work using competent and experienced painters.

1.2 HEALTH AND SAFETY

Refer to the requirements of the [Health and Safety at Work Act 2015](#) and if elimination or isolation is not possible, then minimise the hazards in this work. Refer to WorkSafe NZ publication, [Repainting lead based paints](#), for the required procedures and precautions when treating or removing lead based paint, burning or sanding off paint, or using solvent based paint removers.

1.3 SELECTIONS

Confirm all selections, colours and finishes with the owner.

2 PRODUCTS

2.1 PAINT

As selected and to the paint manufacturer's standards for exterior and/or interior primers, undercoats, sealers, stains, clear coatings, solvent-borne and water-borne paints.

2.2 GAP FILLERS

Linseed oil, putty, plastic wood, wood filler or plastic filler, to suit and to match the surface being prepared.

3 EXECUTION

3.1 INSPECT SURFACES

Inspect surfaces being painted and report to the owner any that will not, after the preparatory work laid down by the paint manufacturer, allow work of the required standard. Confirm that all areas have adequate lighting and are sufficiently free of other construction activities to enable painting work to proceed.

3.2 PROTECT

Cover up adjoining surfaces and areas liable to damage or over-painting.

3.3 REMOVE HARDWARE

Remove hardware and door/window furniture and replace on completion. Do not paint over permanently attached hinges, or any hardware items which cannot be removed.

3.4 PRIMING AND SEALING

Ensure that priming and sealing work needed before or during construction is carried out when required.

3.5 ENVIRONMENTAL CONDITIONS

Carry out work within acceptable temperature and humidity limits, with timber dry, all to the requirements of the paint manufacturer.

3.6 SHARP EDGES, CRACKS AND HOLES

Repair as required by the paint manufacturer.

3.7 PREPARE SURFACES

Prepare surfaces as required by the paint manufacturer. Make good all damage and defects.

3.8 PAINT APPLICATION

Apply paint by brush and/or roller to suit the location of the coating and to the paint manufacturer's requirements. Do not spray on site without express permission.

3.9 MANUFACTURER'S MANUALS

Refer to the paint manufacturers' manuals and follow their preparation, sequence and application requirements applying to each system. Ensure all paint coats in any system are supplied by the same manufacturer.

3.10 SCUFF BETWEEN COATS

Scuff between all coats to remove any dust pick-up, protruding fibres and coarse particles.

3.11 FINISHED PAINT SURFACES

Finished paint surfaces to show uniformity of gloss and colour, with the correct thickness for each coat, and freedom from painting defects. Ensure finished work is clean and free of any disfigurement.

3.12 CLEAN

Clean adjoining surfaces, glass and fittings of any paint contamination.

3.13 REFIT HARDWARE

Refit hardware without damage to the hardware or the adjoining surfaces.

7120 WATER SYSTEM

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out work by or under the direct supervision of a certifying person under the [Plumbers, Gasfitters and Drainlayers Act 2006](#).

2 PRODUCTS

2.1 COPPER WATER PIPE

To [NZS 3501](#).

2.2 POLYBUTYLENE WATER PIPE

Polybutylene tubing complete with fittings and accessories brand-matched to [AS/NZS 2642.2](#).

2.3 POLYPROPYLENE WATER PIPE

PP-R Polypropylene pipes complete with fusion welded fittings and accessories brand-matched to [NZBC G12/VM1](#).

2.4 INSULATION FOR HOT WATER PIPES

Preformed closed cell foam.

2.5 WATER METER

Meter, gate valve and back flow prevention to the requirements of the network utility operator. Minimum 25mm OD Polyethylene cold water main. Allow to excavate, install and back fill for the water main.

2.6 VALVES AND FITTINGS

All valves and fittings required for the system, to [NZBC G12/AS1](#).

2.7 WATER HEATERS

Generally to [NZBC G12/AS1](#), 6.0 **Hot Water Supply Systems** as applicable. Refer to 1213 SELECTIONS/drawings for specific water heater.

3 EXECUTION

3.1 EXECUTION GENERALLY

Carry out work and tests as applicable to [NZBC G12/AS1](#).

3.2 INSTALL COPPER WATER SUPPLY

Size the piping layout to eliminate loss of pressure at any point by simultaneous draw-off. Run pipes in straight runs, firmly fixed to falls, with long radius bends and jointed by brazing or with crox fittings, all to [NZBC G12/AS1](#), 5.0 **Water supply**. Conceal piping, insulate hot water pipework and pressure test before the wall linings are fixed.

3.3 INSTALL POLYBUTYLENE/POLYETHYLENE/POLYPROPYLENE WATER SUPPLY

Type as selected. Size the piping layout to eliminate loss of pressure at any point by simultaneous draw-off. Run pipes complete with all fittings, support and fixing, and jointed to the pipe manufacturer's specifications, all to [NZBC G12/AS1](#), 5.0 **Water supply**. Conceal pipework and pressure test before wall linings are fixed.

3.4 OUTLET LOCATIONS

Ensure wall outlets for exposed pipes are level and centred on the fixture to ensure the neat installation of exposed pipework.

3.5 BACKFLOW PREVENTION

Fit back flow prevention devices to all outlets where it is possible for water or contaminants to backflow in to the potable water supply system.

3.6 INSTALL HOT WATER PIPE INSULATION

Insulate hot water pipes in accordance with the insulation manufacturer's instructions. Cut insulation sections tight between timber framing and tight between the webs of steel studs. Where hair felt is used, wrap around pipes in two layers in opposite directions and secure with galvanized steel wire ties.

3.7 INSTALL WATER HEATER

Install where shown complete with all the necessary fittings to the water heater manufacturer's requirements and [NZBC G12/AS1, 6.11 Water heater installation](#). Gas water heaters also to [AS/NZS 5601.1](#) and [NZBC C/AS1-AS7, 7.2 Gas-burning appliances](#).

3.8 PENETRATIONS

Provide and fit collars and escutcheon plates to match pipework at penetrations through constructions.

3.9 COMPLETION

Pressure test to ensure no leakage and leave in proper working order. Clean tapware and fittings.

7150 SANITARYWARE, TAPWARE & ACCESSORIES

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out work by or under the direct supervision of a certifying person under the [Plumbers, Gasfitters and Drainlayers Act 2006](#).

2 PRODUCTS

2.1 SANITARY FIXTURES, TAPWARE, APPLIANCES AND ACCESSORIES

Refer to 1213 SELECTIONS and drawings for product selections.

3 EXECUTION

3.1 EXECUTION GENERALLY

Carry out installation work and tests to [AS/NZS 3500.2](#), as applicable.

3.2 INSTALL SANITARYWARE

Fit and install sanitaryware and associated screens, elements and hardware, plumb, true to line and rigid, to the fixture manufacturer's requirements. Supply standard chrome plated brass wastes and plastic plugs on chrome plated chains with all basins, tubs and baths.

3.3 INSTALL TAPWARE

Install tapware in accordance with the tap manufacturer's requirements. Flush out on completion. Check that washers or ceramic discs are operating correctly.

3.4 INSTALL SHOWER CUBICLE

Install to [NZBC G1/AS1](#) and in accordance with shower manufacturer's details and requirements. Ensure that screens and doors fit closely and accurately. Test for water egress around sides and base.

3.5 TEST

Test soil and waste disposal systems to ensure no leakage exists and leave in working order.

3.6 ENSURE

Ensure all sanitary plumbing fittings and pipework are complete and operational.

7410 RAINWATER SPOUTING SYSTEM

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 LIAISON

Ensure liaison with associated installations to ensure material selections are compatible and required flashing work is completed.

1.2 ELECTROLYTIC ACTION

Avoid electrolytic action by eliminating contact or continuity of water between dissimilar metals.

2 PRODUCTS

2.1 ALUMINIUM/ZINC ALLOY COATED PRE-PAINTED STEEL SPOUTING

Profile, jointing, brackets and fittings brand matched and complete to the spouting manufacturer's specifications.

2.2 ALUMINIUM/ZINC ALLOY COATED PRE-PAINTED STEEL DOWNPIPES

Seam jointed and complete with stand-off brackets, galvanized screw fixed.

3 EXECUTION

3.1 INSTALL ALUMINIUM/ZINC ALLOY COATED STEEL PRE-PAINTED SPOUTING AND DOWNPIPES

Screw fix brackets, set to falls to outlets, with spouting joints silicone sealed and pop-riveted to the spouting manufacturer's requirements. Screw fix stand off brackets, set pipes plumb and clear of the wall, with joints silicone sealed. Discharge into stormwater bends.

3.2 ENSURE

Ensure rainwater services are operational, flashings complete and the building weathertight.

7420 SANITARY WASTE SYSTEM

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out work by or under the direct supervision of a certifying person under the [Plumbers, Gasfitters and Drainlayers Act 2006](#).

2 PRODUCTS

2.1 PVC-U WASTE, SOIL AND VENT PIPES

PVC-U pipe, complete with fittings brand-matched to the pipe manufacturer's requirements.

2.2 EXPOSED PIPES AND TRAPS

As selected and to the following details:

- chrome plate on copper pipes and associated copper and brass fittings
- white polybutylene or PVC, including all associated fittings.

3 EXECUTION

3.1 EXECUTION GENERALLY

Carry out sanitary plumbing work and tests as applicable to:

- [NZBC G13/AS1](#)

3.2 ELECTROLYTIC ACTION

Avoid electrolytic action by eliminating actual contact or continuity of water between dissimilar metals.

3.3 INSTALL TRAPS, WASTE AND VENT PIPES

Connect waste outlets to traps and run waste pipes and back vents concealed, sized and fixed to [NZBC G13/AS1](#). Discharge wastes into floor waste gully, drainage system stack, soil pipe, or gully trap as shown. Bird proof mesh to roof vents and vermin proof mesh to untrapped waste pipes.

3.4 PENETRATIONS

At penetrations through constructions provide and fit collars and escutcheon plates to match pipework. Exterior roof and wall penetrations to [NZBC E2/AS1](#).

3.5 TEST

Test soil and waste disposal systems to [NZBC G13/AS1](#), to ensure no leakage exists and leave in working order.

3.6 ENSURE

Ensure all sanitary plumbing fittings and pipework are complete and operational.

7430 DRAINAGE SYSTEMS

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 QUALIFICATIONS

Carry out work by or under the direct supervision of a person registered under the [Plumbers, Gasfitters and Drainlayers Act 2006](#).

1.2 AS BUILT DOCUMENTS

Supply a 1:100 as-built drawing to the BCA and the owner on completion.

2 PRODUCTS

2.1 MATERIALS

Concrete:	17.5 MPa prescribed grade.
Reinforcement:	Grade 300 deformed bars.
PVC-U pipes:	PVC-U pipes bends, junctions, fittings and joints.
Field drains:	Plastic pipes for field drains perforated and coiled with filter fabric over.
Drainage/filling materials	
Granular fill:	Clean gravel or crushed stone or a blend of these. Particle size from minimum 7mm to maximum 20mm.
Selected fill:	Fine grain soil or granular material suitable for bedding, excluding topsoil.
Ordinary fill:	Top soil or other excavated materials.

2.2 FITTINGS

Gully traps:	To NZBC G13/AS2 , 3.3 Gully traps , complete with grating.
Strip drain channel:	Proprietary, modular, variable invert, PVC-U or precast concrete drainage channel sections and drainage sump, embedded in site concrete and fitted with selected metal gratings.

3 EXECUTION

3.1 EXCAVATE

Excavate for drains to a firm even base with correct gradients set in straight runs.

3.2 MANUFACTURER'S REQUIREMENTS

All drainage installations to the pipe and fitting manufacturer's requirements.

3.3 EXECUTION GENERALLY

Carry out drainage work as applicable to:

- [NZBC G13/AS2](#) and [NZBC E1/AS1](#).

3.4 LAY WASTEWATER DRAINS

Lay drains in straight runs to correct gradients, to discharge into the NUO's sewer. Set inspection fittings on a concrete base.

3.5 INSTALL GULLY TRAPS

Set on concrete 50mm above surrounding ground or paving and brought up to protect the top of the fitting. Trowel off.

3.6 LAY STORMWATER DRAINS

Confirm the required location of downpipes and finished ground levels before commencing pipework. Set downpipe bends in concrete brought up to protect the top of the bend from damage. Lay drains in straight runs to correct gradients to discharge into the NUO's stormwater system.

3.7 INSTALL STRIP DRAIN CHANNEL

Excavate trench and form site concrete base to fall. Set interlocking channel sections, sumps and accessories in place, all in accordance with the channel manufacturer's requirements. Check falls and install gratings and covers.

3.8 CONCRETE ENCASEMENT

Concrete encase shallow drains and drains under driveways, on a 100mm deep 17.5 MPa concrete bed reinforced with three 10mm mild steel bars. Surround pipes with a polythene membrane to allow movement and encase in 100mm 17.5 MPa concrete.

3.9 FIELD TEST

Field test drains for watertightness to the satisfaction of the BCA inspector.

3.10 BACKFILL

Backfill drain lines in 150mm layers, well tamped but without disturbing the drains. Finish off garden areas with 150mm of topsoil, slightly mounded above the finished ground line. Public roads and footpaths to be made good to the controlling authority requirements.

7700 ELECTRICAL

1 GENERAL

Refer to 1213 SELECTIONS/drawings for specific product, material, accessories and finish selections.

1.1 COMPLY

Comply with the Electricity (Safety) Regulations 2010, [AS/NZS 3000](#) for listed and prescribed work and with the NUO's requirements. Apply for the service connection. Arrange for the required inspections of listed work. Pay all fees.

1.2 QUALIFICATIONS

Carry out work by or under the direct supervision of an electrical licensed supervisor under the Electricity (safety) Regulations 2010.

1.3 ELECTRICAL CERTIFICATE OF COMPLIANCE

Provide, prior to connection, a Certificate of Compliance (CoC) as required by the Electricity (Safety) Regulations 2010, to the owner and if required to the NUO. Allow the NUO to view before the meter installation, listed work inspection, polarity check and livening of supply.

1.4 ELECTRICAL SAFETY CERTIFICATE

Provide an Electrical Safety Certificate (ESC), as required by the Electricity (Safety) Regulations 2010, to the owner and when required the BCA. To be provided at completion of the work, prior to Practical Completion.

1.5 SAFETY OF INSTALLATION

When required by the Electrical (Safety) Regulations 2010, before installation work commences, provide a Certified Design to Electrical (Safety) Regulations 2010, regulations 58. This will may not be required for domestic installations or Low Risk Work.

2 PRODUCTS

2.1 METER BOARD / DISTRIBUTION BOARD / SUB BOARD

Proprietary manufactured meter board complete with flashing kit. Proprietary manufactured distribution board, zinc plated powder coated, or heavy duty plastic, fire resistant enclosed construction, complete with neutral and earth busbars, MCB's, RCD's and main switch. All protective devices: 6kA MCB's of the appropriate rating. Fit to board manufacturer's requirements where detailed. Recess into wall and ensure fire containment properties of the enclosure is maintained.

2.2 MAIN SUPPLY

Excavate, lay underground mains to NUO requirements, install cable marker, back fill. Public roads and footpaths to be made good to the controlling authority requirements.

2.3 CABLES

Tough plastic sheathed copper conductors. Minimum sizes are indicated below. Increase these as necessary due to method of installation, cable length or load.

Lighting circuits: 1.5mm² on 10 amp MCBs for domestic construction

Power circuits: 2.5mm² on 16 amp MCBs for domestic construction

2.4 ELECTRICAL ACCESSORIES

As selected and to the following details:

Switch units	Minimum 16 amp, 230 volt flush polycarbonate units. For number of switches per unit, dimmer units, neon (indicator or toggle) units, locator units and 2-way units refer to the electrical drawings.
Switched socket units:	10 amp, 230 volt flush polycarbonate 3 pin combined switch units.
Hot water system switch:	One way 20 amp switch complete with clamp for flexible PVC conduit.
Stove/range socket outlet and switch:	32 amp, 230 volt flush polycarbonate 3 pin combined switch unit, with remote isolating switch.

3 EXECUTION

3.1 CABLING

Install with a maximum of 10 light outlet units or 6 switched socket units on any circuit. Separate circuits for all electric heating appliances. All cabling run concealed. No TPS cable laid directly in concrete. Locate holes in timber framing for the passage of cables at the centre line of the timber member. Provide earth bonding and main earth.

3.2 INSTALL SWITCH AND SOCKET UNITS

Fit single and double switch units and socket units level and plumb where shown on the drawings. Install at the following heights (to the centre of the unit) unless shown otherwise on the drawings or to match existing.

Switch Units:	1000mm above floor
Socket Units:	400mm above floor
	150mm above work benches

Mount switches vertically and socket units horizontally. Label switch units which control electrical equipment by engraving on the rocker switch.

3.3 INSTALL LIGHT FITTINGS

Install selected light fittings in the locations and heights shown on the drawings and in accordance with the fitting manufacturer's requirements. Recessed fittings to [AS/NZS 3000](#), types IC-F, IC, CA-80 or CA-135 only (no clearance to insulation required for these types).

3.4 ELECTRIC HOT WATER SYSTEM

Wire as a separate circuit through a wall-mounted isolating switch, with the cable from switch to element encased in flexible PVC conduit, clamp fixed at each end.

3.5 WIRE FOR PLUMBING FITTINGS

Wire for fittings to the Electricity (Safety) Regulations 2010 and to the fitting manufacturer's requirements.

3.6 INSTALL DOMESTIC SMOKE ALARMS

Install alarms to [NZBC F7/AS1](#), 3.3 Location of smoke alarms, and to manufacturer's requirements, fitted neatly and without damage to the surrounding finish.

3.7 ELECTRIC POWERED FITTINGS AND EQUIPMENT

Install and wire selected fittings and equipment to the Electricity (Safety) Regulations 2010 and the individual fittings and equipment manufacturer's requirements. Refer to the drawings for required layouts and locations for equipment.

3.8 COMPLETION

Leave all fittings, lamps and tubes operational, with equipment and diffusers clean.