



ADVERTISEMENT FOR BIDS

SPECIAL PROVISIONS

BIDDERS DOCUMENTS

TRACS/Proj. No.:

089A YV 362 F062401C A89-B(225)T
PRESCOTT-FLAGSTAFF HIGHWAY (SR 89A)
(SR 89A AT PAGE SPRINGS ROAD)

Contracts and Specifications Group
205 S. 17TH Ave., 2nd Floor, M/D 121F
Phoenix, Arizona 85007-3217

ARIZONA DEPARTMENT OF TRANSPORTATION

ADVERTISEMENT FOR BIDS

BID OPENING: FRIDAY, OCTOBER 16, 2026, AT 11:00 A.M. (M.S.T.)

TRACS NO	089A YV 362 F0624 01C
PROJECT NO	A89-B(225)T
TERMINI	PRESCOTT – FLAGSTAFF HIGHWAY (SR 89A)
LOCATION	SR 89A AT PAGE SPRINGS ROAD

ROUTE NO.	MILEPOST	DISTRICT	ITEM NO.
SR 89A	362.18 to 362.73(SB) 362.24 to 362.91(NB)	NORTHCENT	103629

The amount programmed for this contract is \$5,087,000. The location and description of the proposed work are as follows:

The proposed project is located in Yavapai County along SR 89A from southbound MP 362.18 to MP 362.73, and northbound MP 362.24 to MP 362.91. The work consists of reconstructing the existing SR 89A Page Springs Road Intersection. The existing movement to and from SB SR 89A will be removed and two new U-Turns north and south of Page Springs Road intersection will be constructed. The work includes AC removal, excavation, embankment, asphaltic concrete paving, pipe culvert installation and extensions, reinforced concrete box culvert installation and extensions, asphaltic concrete milling and micro-surfacing, erosion control, pavement markings, signing, lighting, and other related work.

The time allowed for the completion of the work included in this contract will be 115 working days.

The Arizona Department of Transportation, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252, 42 U.S.C. §§ 2000d to §§ 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively ensure that any contract entered into pursuant to this advertisement, Disadvantaged Business Enterprises will be afforded full and fair opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

Contract documents, and other project documents, if applicable, are available as electronic files, at no charge, from the Department's website through the ADOT Contracts and Specifications Group (<https://azdot.gov/business/contracts-and-specifications/current-advertisements>).

Documents will be available within one week following the advertisement for bids.

To submit a valid bid, the bidder must (1) have prequalification from the Department as necessary for the project, and (2) be included on the project Plansholder List as a Prime.

The Application for Contractor Prequalification may be obtained from the Contracts and Specifications website.

This project requires electronic bidding. If a request for approval to bid as a Prime Contractor is received less than five working days prior to bid opening, the Department cannot guarantee the request will be acted on.

This contract is subject to the provisions of Arizona Revised Statutes Section 42-5075 -- Prime contracting classification; exemptions; definitions.

No award will be made to any contractor who is not a duly licensed contractor in accordance with Arizona Revised Statutes 32-1101 through 32-1170.03.

All labor employed on this project shall be paid in accordance with the minimum wage rates shown in the General Wage Decision. These rates have been determined in accordance with the requirements of the law and issued by the Secretary of Labor for this project. The wage scale is on file in Contracts and Specifications Section and copies may be obtained at all reasonable times.


Persons that require a reasonable accommodation based on language or disability should contact ADOT's Contracts and Specifications Office by phone (602) 712-7221. Requests should be made as early as possible to ensure the State has an opportunity to address the accommodation.

Las personas que requieran asistencia (dentro de lo razonable) ya sea por el idioma o discapacidad deben ponerse en contacto con ADOT (602) 712-7221.

The bidder shall provide an electronic proposal guaranty payable to the Arizona Department of Transportation for 10 percent of the amount of the bid.

Prior to the bid opening date, any questions pertaining to the project documents shall be submitted to the Department in a written format through the Bid Express (Bidx) website at <https://www.bidx.com/az/lettings>. Questions shall be submitted through the Questions and Answers (Q&A) link located within the corresponding letting date and project proposal number links. The Department may not answer all questions, and any decision on whether a question is answered will be within the sole discretion of the Department. Any questions received less than three working days prior to the bid opening date may not be answered.

The Engineering Specialist assigned to this project is: Farhana Jesmin, fjesmin@azdot.gov, any correspondence with the Engineering Specialist is subject to posting onto Bidx through the project's Q&A link. Answers to questions will not be given verbally, but will be posted exclusively to the Bidx website.

A handwritten signature in black ink, appearing to read 'Bhmen' or 'Bhman', with a horizontal line underneath.

Brahama Singh, PE,
Group Manager,
Contracts & Specifications

Project Advertised on: 8/17/2026

SPECIAL PROVISIONS

FOR

ARIZONA PROJECT

089A YV 362 F0624 01C

A89-B(225)T

PRESCOTT – FLAGSTAFF HIGHWAY (SR 89A)

SR 89A AT PAGE SPRINGS ROAD

INTERSECTION IMPROVEMENT

PROPOSED WORK:

The proposed project is located in Yavapai County along SR 89A from southbound MP 362.18 to MP 362.73, and northbound MP 362.24 to MP 362.91. The work consists of reconstructing the existing SR 89A Page Springs Road Intersection. The existing movement to and from SB SR 89A will be removed and two new U-Turns north and south of Page Springs Road intersection will be constructed. The work includes AC removal, excavation, embankment, asphaltic concrete paving, pipe culvert installation and extensions, reinforced concrete box culvert installation and extensions, asphaltic concrete milling and micro-surfacing, erosion control, pavement markings, signing, lighting, and other related work.

PROFESSIONAL ENGINEER SEALS:

These Special Provisions represent the combined efforts of the following organizations:


(1) Stanley Consultants, Inc.

(2) ADOT Roadside Development

A representative of each organization has affixed their seal below, which attests that portions of these Special Provisions were prepared under their direction.



Stanley Consultants, Inc.

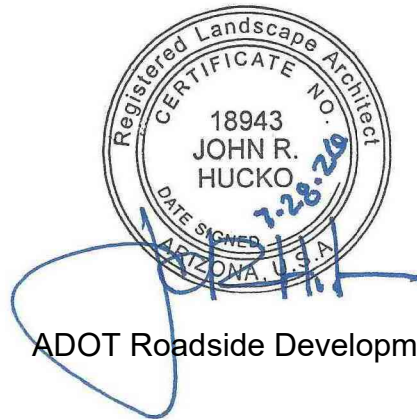

ADOT Roadside Development

(SPC00FA, 03/19/26)

SPECIFICATIONS:

The work embraced herein shall be performed in accordance with the requirements of the following separate documents:

Arizona Department of Transportation, Standard Specifications for Road and Bridge Construction, Edition of 2021,

Arizona Department of Transportation, Roadway Engineering Group, Construction Standard Drawings, listed in the project plans, and available on the Department's website,

Arizona Department of Transportation, Traffic Engineering Group, Manual of Approved Signs, available on the Department's website,

Arizona Department of Transportation, Traffic Engineering Group, Temporary Traffic Control Design Guidelines, dated April, 2025, available on the Department's website,

Manual on Uniform Traffic Control Devices for Streets and Highways, 2023 edition and Arizona Supplement to the 2023 edition, dated January 2026,

The Proposal Pamphlet which includes the following documents:

These Special Provisions,

Attachment A – Subgrade Acceptance Chart

Required Contract Provisions Federal-Aid Construction Contracts (Form FHWA 1273 Revised October 23, 2023),

Standard Federal Equal Employment Opportunity Construction Contract Specifications (Executive Order 11246), July 1, 1978, Revised November 3, 1980 and Revised April 15, 1981,

Title VI / Non-Discrimination Assurances,
Appendix A
Appendix E,

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246), July 1, 1978, Revised November 3, 1980 and Revised April 15, 1981,

Equal Employment Opportunity Compliance Reports, Federal-Aid Projects, February 1, 1977, Revised July 1, 1978, Revised November 3, 1980, Revised April 15, 1981, Revised September 7, 1983, Revised October 15, 1998, Revised January 1, 2005, Revised August 1, 2005, and Revised March 1, 2015,

Wage Determination Decision,

Bidding Schedule,

Proposal,

Surety (Bid) Bond, 12-1303,

Certification With Regard to the Performance of Previous Contracts or Subcontracts
Subject to the Equal Opportunity Clause and the Filing of Required Reports, Federal Aid
Projects, April, 1969, Rev. July, 2003,

Certification With Respect to the Receipt of Addenda,

Participation in Boycott of Israel Certification Form,

Forced Labor of Ethnic Uyghurs Ban Certification Form, Rev. November 2022.

PROPOSAL GUARANTY:

Each bidder is advised to satisfy itself as to the character and the amount of the proposal guaranty required in the Advertisement for Bids.

CONTRACT DOCUMENTS:

The bidder to whom an award is made will be required to execute a Performance Bond and a Payment Bond, each in 100 percent of the amount of the bid, an Insurance Certificate and the Contract Agreement.

A copy of these documents is not included in the Proposal Pamphlet; however, each bidder shall satisfy itself as to the requirements of each document.

The documents, approved by the Department of Transportation, Highways Division, are identified as follows:

Statutory Performance Bond, 12-1301, September, 1992

Statutory Payment Bond, 12-1302, September, 1992

Contract Agreement, 12-0912, August, 2000

Certificate of Insurance, 12-0100, June, 1998

A copy of each document may be obtained by making a request to Contracts & Specifications.

MATERIAL AND SITE INFORMATION:

Projects requiring materials, excavation, or site investigation may have additional information available concerning the material investigations of the project site and adjacent projects. This

information, when available and applicable, may be examined in the Office of the Bridge Group-Geotechnical Services, located at 205 S. 17th Avenue, Phoenix, AZ 85007-3212. The contractor may contact Bridge Group at (602) 712-7481 to schedule an appointment to examine the information. This information will not be attached to the contract documents.

(TITLE VI, 08/19/21)

STANDARD TITLE VI SPECIFIC ASSURANCES:

The Arizona Department of Transportation, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252, 42 U.S.C. §§ 2000d to 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively ensure that any contract entered into pursuant to this advertisement, Disadvantaged Business Enterprises will be afforded full and fair opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

(EPRISENGL-IFR)

DISADVANTAGED BUSINESS ENTERPRISES:

1.0 Policy:

The Arizona Department of Transportation (hereinafter the Department) has established a Disadvantaged Business Enterprise (DBE) program in accordance with the regulations of the U.S. Department of Transportation (USDOT), 49 Code of Federal Regulation Part 26 (49 CFR Part 26), as revised by the USDOT DBE Interim Final Rule (IFR) issued October 3, 2025 (hereinafter referred to as IFR).

The Department has received Federal financial assistance from the U.S. Department of Transportation and as a condition of receiving this assistance, the Department has signed an assurance that it will comply with 49 CFR Part 26, as revised by the IFR.

It is the policy of the Department to ensure that DBEs (hereinafter DBE or DBE firm), as defined in Part 26, have an equal opportunity to receive and participate in USDOT-assisted contracts. It is also the policy of the Department:

- (A) To ensure nondiscrimination in the award and administration of USDOT-assisted contracts;
- (B) To create a level playing field on which DBEs can compete fairly for USDOT-assisted contracts;
- (C) To ensure that the DBE program operates in a nondiscriminatory manner and without regard to race or sex, while maximizing efficiency of service;

- (D) To ensure that only firms that fully meet 49 CFR Part 26 eligibility standards are counted as DBEs;
- (E) To help remove barriers to the participation of DBEs in USDOT-assisted contracts,
- (F) To assist in the development of firms that can compete successfully in the market place outside the DBE program; and
- (G) To promote the use of DBEs in all types of federally-assisted contracts and procurement activities.

It is also the policy of the Department to facilitate and encourage participation of Small Business Concerns (SBCs), as defined herein, in USDOT-assisted contracts. The Department encourages contractors to take reasonable steps to eliminate obstacles to SBCs' participation and to utilize SBCs in performing contracts.

2.0 Assurances of Non-Discrimination:

The contractor, subrecipient, or subcontractor shall not discriminate on the basis of race, color, sex or national origin in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 as revised by the IFR in the award and administration of USDOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the State deems appropriate, which may include, but are not limited to:

- (A) Withholding monthly progress payments;
- (B) Assessing sanctions; and/or
- (C) Disqualifying the contractor from future bidding as non-responsible.

The contractor, subrecipient, or subcontractor shall ensure that all subcontract agreements contain this non-discrimination assurance.

3.0 Definitions:

- (A) Commercially Useful Function (CUF):** Commercially Useful Function is defined in 49 CFR Part 26.55. That definition is incorporated herein by reference.
- (B) Disadvantaged Business Enterprise (DBE):** A DBE, as defined in 49 CFR Part 26.5, is a for-profit small business concern which meets both of the following requirements:
 - (1) Is at least 51 percent owned by one or more individuals who are both socially and economically disadvantaged; and,
 - (2) Whose management and daily business operations are controlled by one or more of the socially and economically disadvantaged individuals who own it.

- (C) **Joint Check:** a two-party check between a subcontractor, DBE and/or non-DBE, a prime contractor and the regular dealer of material supplies.
- (D) **Joint Venture:** an association of a DBE firm and one or more other firms to carry out a single, for-profit business enterprise, for which parties combine their property, capital, efforts, skills and knowledge, and in which the DBE is responsible for a distinct, clearly defined portion of the work of the contract and whose share in the capital contribution, control, management, risks, and profits of the joint venture are commensurate with its ownership interest.
- (E) **NAICS Code:** The North American Industry Classification System (NAICS) is the standard used by Federal statistical agencies in classifying business establishments for the purpose of collecting, analyzing, and publishing statistical data related to the US business economy.
- (F) **Non-DBE:** any firm that is not a DBE.
- (G) **DBE Conscious:** a measure or program that is focused specifically on assisting only DBEs.
- (H) **DBE Neutral:** a measure or program that is, or can be, used to assist all small businesses.
- (I) **Small Business Concern:** a business that meets all of the following conditions:
- (1) Operates as a for-profit business.
 - (2) Operates a place of business primarily within the U.S. or makes a significant contribution to the U.S. economy through payment of taxes or use of American products, materials, or labor.
 - (3) Is independently owned and operated.
 - (4) Is not dominant in its field on a national basis; and
 - (5) Does not have annual gross receipts that exceed the Small Business Administration size standards average annual income criteria for its primary North American Industry Classification System (NAICS) code.
- (J) **Socially and Economically Disadvantaged Individuals:** Socially and Economically Disadvantaged Individuals is defined in 49 CFR Part 26.5, as revised by the IFR. That definition is incorporated here.
- (1) Any individual who is a citizen (or lawfully admitted permanent resident) of the United States and who a certifier finds to be socially and economically disadvantaged on an individual basis.
 - (2) A determination that an individual is socially and economically disadvantaged must not be based in whole or in part on race or sex. For that reason, all

applicants shall qualify as socially and economically disadvantaged if they can demonstrate that they can meet the relevant criteria described in 49 CFR Part 26.67.

- (3) Being born in a particular country does not, standing alone, mean that a person is necessarily socially and economically disadvantaged.

4.0 Working with DBEs:

The Department works with DBEs and assists them in their efforts to participate in the highway construction program. All bidders should contact the Department's Business Engagement and Compliance Office (BECO) by phone, through email, or at the address shown below, for assistance in their efforts to use DBEs in the highway construction program of the Department. BECO contact information is as follows:

Arizona Department of Transportation
Business Engagement and Compliance Office
1801 W. Jefferson Street, Ste. 101, Mail Drop 154A
Phoenix, AZ 85007
Phone (602) 712-7761
Email: contractorcompliance@azdot.gov
Website: www.azdot.gov/business/business-engagement-and-compliance

4.01 Business Development Program:

The Department has established the Business Development Program as an initiative to encourage and develop disadvantaged businesses in the highway construction industry. The Department is committed to providing new, emerging, developmental and transitional DBEs with general and firm-specific training and technical assistance. The Department intends for this assistance to aid DBEs to become competitive within the heavy highway and construction industry market places. In particular, the Department's DBE Supportive Services Program (DBE/SS) is designed to work in collaboration with stakeholder organizations (including departments and agencies of State and Federal Governments, small business organizations, tribal governments, profit and nonprofit corporations) to help DBEs to successfully compete for highway construction projects and become self-sufficient. The program provides educational opportunities for DBEs regarding current market conditions, Federal regulatory compliance, and best business practices. These efforts are reinforced with one-on-one business counseling for DBEs certified in areas that directly support Federal-aid highway projects, small group workshops, conferences, business expositions, regular in-person training opportunities, and regular virtual training opportunities. For guidance regarding this program, refer to the Business Development Program Guidelines available on the BECO website at <https://azdot.gov/business/business-engagement-and-compliance/dbe-supportive-services/business-development-program/disadvantaged-business-enterprise-dbe-program/dbe>.

The Business Development Program is intended to increase legitimate DBE activities. The program operates in conformity with the Federal DBE rules and regulations. The Department's DBE/SS participants may not circumvent the Federal DBE rules or regulations.

5.0 Applicability:

During the transition period, the IFR provides that until the Arizona Unified Certification Program (UCP) completes the recertification process, the Department may not 1) set any DBE contract goals or 2) count any participation towards its overall DBE goal.

The Department has established an overall annual goal for DBE participation on Federal-aid contracts. The Department intends for the goal to be met with a combination of DBE conscious efforts and DBE neutral efforts once the DBE recertification process is completed in accordance with the IFR. DBE conscious participation occurs where the contractor uses a percentage of DBEs, as defined herein, to meet the contract-specified goal. DBE neutral efforts are those that are, or can be, used to assist all small businesses or increase opportunities for all small businesses. The regulation, 49 CFR 26, as revised by the IFR describes DBE neutral participation as when a DBE wins a prime contract through customary competitive procurement procedures or is awarded a subcontract on a prime contract that does not carry a DBE contract goal.

The provisions are applicable to all bidders.

6.0 Certification and Registration:

6.01 DBE Certification:

Certification as a DBE shall be predicated on:

- (A) The completion and execution of an application for certification as a "Disadvantaged Business Enterprise".
- (B) The submission of documents pertaining to the firm(s) as stated in the application(s), including but not limited to a statement of social disadvantage and a personal financial statement.
- (C) The submission of any additional information which the Department or the applicable Arizona Unified Certification (UCP) agency may require to determine the firm's eligibility to participate in the DBE program.
- (D) The information obtained during the on-site visits to the offices of the firm and to active job-sites.

Application Submission. Applications for Disadvantaged Business Enterprise (DBE) certification may be filed with the Department or the applicable UCP agency at any time through the Arizona Unified Transportation Registration and Certification System (AZ UTRACS) website at <https://utracs.azdot.gov/Home>.

Implementation of Revised Federal Standards. Effective October 3, 2025, all certification applications and renewals shall be reviewed and processed in accordance with the 49 CFR Part 26 as revised by the IFR. The revised rule modifies certification standards, documentation, and evidentiary requirements applicable to determinations of social and economic disadvantage, business size, ownership, and control.

Transition Period. During the transition period in which the Department and participating UCP agencies are updating internal procedures and the AZ UTRACS system to implement the revised rule, certification applications may continue to be submitted through the existing online platform. Applicants submitting applications during this period may be required to furnish additional or supplemental documentation consistent with the revised certification criteria upon system update or upon request by the certifying agency.

All applicants, whether filing initial or renewal applications, shall comply with any new or amended federal documentation requirements that become effective under 49 CFR Part 26 as revised by the IFR, including but not limited to personal narrative statements, financial disclosures, and supporting affidavits required to demonstrate eligibility under the revised standards.

The Department is a member of the AZ Unified Certification Program (AZUCP). During the transition period, the list of firms listed in AZ UTRACS were certified prior to October 3, 2025, not in accordance with the IFR, and therefore do not count for DBE credit, unless otherwise noted in AZ UTRACS. The list indicates contact information and specialty for each DBE firm and may be sorted in a variety of ways. However, the Department does not guarantee the accuracy and/or completeness of this information, nor does the Department represent that any licenses or registrations are appropriate for the work to be done.

The Department's certification of a DBE is not a representation of qualifications and/or abilities only that the firm has met the criteria for DBE certification as outlined in 49 CFR Part 26, as revised by the IFR. The contractor bears all risks of ensuring that DBE firms selected by the contractor are able to perform the work.

6.02 SBC Registration:

To comply with 49 CFR Part 26.39, the Department's DBE Program incorporates contracting requirements to facilitate participation by Small Business Concerns (SBCs) in federally assisted contracts. SBCs are for-profit businesses registered to do business in Arizona that meet the Small Business Administration (SBA) size standards for average annual revenue criteria for its primary North American Industry Classification System (NAICS) code.

While the SBC component of the DBE program does not require utilization goals on projects, the Department encourages contractors to utilize small businesses that are registered in AZ UTRACS on their contracts, in addition to DBEs meeting the certification requirement in accordance with the IFR. However, SBCs that are not DBEs will not be counted toward DBE participation.

SBCs can register online at the AZ UTRACS website at <http://utracs.azdot.gov/Home/>. The Department's registration of SBCs is not a representation of qualifications and/or abilities. The contractor bears all risks of ensuring that SBC firms selected by the contractor are able to perform the work.

7.0 DBE Financial Institutions:

The Department thoroughly investigates the full extent of services offered by financial institutions owned and controlled by socially and economically disadvantaged individuals in its service area and makes reasonable efforts to use these institutions. The Department encourages prime contractors to use such institutions on USDOT assisted contracts. However, use of DBE financial institutions will not be counted toward DBE participation.

The Department encourages prime contractors to research the Federal Reserve Board website at www.federalreserve.gov to identify minority-owned banks in Arizona derived from the Consolidated Reports of Condition and Income filed quarterly by banks (FFIEC 031 and 041) and from other information on the Board's National Information Center database.

8.0 Time is of the Essence:

TIME IS OF THE ESSENCE IN RESPECT TO THE DBE PROVISIONS.

9.0 Computation of Time:

In computing any period of time described in this DBE special provision, such as calendar days, the day from which the period begins to run is not counted. When the last day of the period is a Saturday, Sunday, or Federal or State holiday, the period extends to the next day that is not a Saturday, Sunday, or Federal or State holiday. When the Department's offices are closed for all or part of the last day, the period extends to the next day on which the Department's offices are open.

10.0 Contractor and Subcontractor Requirements:

10.01 General:

The contractor shall establish a DBE program that will ensure nondiscrimination in the award and administration of contracts and subcontracts.

Agreements between the bidder and a DBE in which the DBE promises not to provide subcontracting quotations to other bidders are prohibited.

10.02 Blank:

11.0 Bidders/Proposers List and AZ UTRACS Registration Requirement:

Under 49 CFR Part 26.11, DOTs are required to collect certain information from all contractors and subcontractors who seek to work on federally-assisted contracts in order to set overall and contract DBE goals. The Department collects this information through a Bidders/Proposers List when firms register their companies on the Arizona Unified Transportation Registration and Certification System (AZ UTRACS) web portal at <http://utracs.azdot.gov/Home/> a centralized database for companies that seek to do business with the Department. This information will be maintained as confidential to the extent allowed by Federal and State law.

All prime contractors, subcontractors, and DBEs shall: 1) register in AZ UTRACS, and 2) maintain their profile with current and accurate firm information. Bidders may verify that their firm and each subcontractor is registered using the AZ UTRACS website.

Bidders may obtain additional information at the AZ UTRACS website or by contacting BECO.

Bidders shall create the Bidders/Proposers List in the AZ UTRACS by selecting all subcontractors, service providers, manufacturers and suppliers that expressed interest or submitted bids, proposals or quotes for this contract. The Bidders/Proposers List form must be complete and must include the names for all subcontractors, service providers, manufacturers and suppliers regardless of the bidders' intentions to use those firms on the project.

All bidders must complete the Bidders/Proposers List online at AZ UTRACS whether they are the apparent low bidder or not. A confirmation email will be generated by the system. The bidders shall submit to BECO a copy of the email confirmation no later than 4:00 p.m. on the fifth calendar day following the bid opening. Faxed copies are acceptable.

FAILURE TO SUBMIT THE REQUIRED BIDDERS/PROPOSERS LIST CONFIRMATION EMAIL TO BECO BY THE STATED TIME AND IN THE MANNER HEREIN SPECIFIED SHALL BE CAUSE FOR THE BIDDER BEING DEEMED INELIGIBLE FOR AWARD OF THE CONTRACT.

12.0 DBE Goals:

During the transition period, the IFR provides that until the UCP completes the recertification process, the Department may not 1) set any DBE contract goals or 2) count any participation towards its overall DBE goal. The Department will not be counting any DBE conscious or DBE neutral efforts towards its overall DBE goal during this transitional period.

The Department has not established contract goals for DBE participation in this contract. Contractors are still encouraged to employ reasonable means to obtain DBE neutral efforts. Contractors must retain records in accordance with these DBE specifications. The contractor is notified that this record keeping is important to the Department so that it can track DBE participation where only DBE neutral efforts are employed.

13.0 Payment Reporting:

The contractor shall report on a monthly basis indicating the amounts paid to all subcontractors, of all tiers, working on the project. Reporting shall be in accordance with Subsection 109.06(B)(5) of the specifications.

14.0 Crediting DBE Participation:

14.01 General Requirements:

During the transition period, the IFR provides that until the UCP completes the recertification process, the Department may not count any participation towards its overall DBE goal. This applies to both DBE conscious and DBE neutral efforts.

To count toward DBE participation, the DBE firm must be certified in each NAICS code applicable to the kind of work the firm will perform on the contract. NAICS for each DBE can be found on the AZ UTRACS under the Firm Directory. General descriptions of all NAICS codes can be found at www.naics.com.

The entire amount of a contract that is performed by the DBE's own forces, including the cost of supplies and materials purchased by the DBE for the work on the contract and equipment leased by the DBE will be credited toward DBE participation. Supplies and equipment the DBE subcontractor purchases or leases from the prime contractor or its affiliate will not be credited toward DBE participation.

The contractor bears the responsibility to determine whether the DBE possesses the proper contractor's license(s) to perform the work.

The Department's certification is not a representation of a DBE's qualifications and/or abilities. The contractor bears all risks that the DBE may not be able to perform its work for any reason.

A DBE may participate as a prime contractor, subcontractor, joint venture partner with either a prime contractor or a subcontractor, or as a vendor of materials or supplies. A DBE joint venture partner shall be responsible for a clearly defined portion of the work to be performed, in addition to meeting the requirements for ownership and control.

The dollar amount of work to be accomplished by DBEs, including partial amount of a lump sum or other similar item, shall be on the basis of agreements such as: subcontract, purchase order, hourly rate, and rate per ton.

With the exception of bond premiums, all work must be attributed to specific bid items. Where work applies to several items, the DBE contracting arrangement must specify unit price and amount attributable to each bid item. DBE credit for any individual item of work performed by the DBE shall be the lesser of the amount to be paid to the DBE or the prime contractor's bid price. If the amount bid by the DBE on any item exceeds the prime contractor's bid amount, the prime contractor may not obtain credit by attributing the excess to other items.

Where more than one DBE is engaged to perform parts of an item (for example, supply and installation), the total amount payable to the DBEs will not be considered in excess of the prime contractor's bid amount for that item.

Bond premiums may be stated separately, so long as the arrangement between the prime contractor and the DBE provides for separate payment not to exceed the price charged by the bonding company.

DBE credit may be obtained only for specific work done for the project, supply of equipment specifically for physical work on the project, or supply of materials to be incorporated in the work. DBE credit will not be allowed for costs such as overhead items, capital expenditures (for example, purchase of equipment), and office items.

If a DBE performs part of an item (for example, installation of materials purchased by a Non-DBE), the DBE credit shall not exceed the lesser of (1) the DBE's contract or (2) the prime contractor's bid for the item, less a reasonable deduction for the portion performed by the Non-DBE.

When a DBE performs as a partner in a joint venture, only that portion of the total dollar value of the contract which is clearly and distinctly performed by the DBE's own forces can be credited.

The contractor may credit second-tier subcontracts issued to DBEs by non-DBE subcontractors. Any second-tier subcontract to a DBE must meet the requirements of a first-tier DBE subcontract.

A prime contractor may credit the entire amount of that portion of a construction contract that is performed by the DBE's own forces. The cost of supplies and materials obtained by the DBE for the work of the contract can be included so long as that cost is reasonable. Leased equipment may also be included. No credit is permitted for supplies purchased or equipment leased from the prime contractor or its affiliate(s).

When a DBE subcontracts a part of the work of its contract to another firm, the value of the subcontract may be credited towards DBE participation only if the DBE's subcontractor is itself a DBE and performs the work with its own forces. Work that a DBE subcontracts to a non-DBE firm does not count towards DBE participation.

A prime contractor may credit the entire amount of fees or commissions charged by a DBE firm for providing a bona fide service, such as professional, technical, consultant, or managerial services, or for providing bonds or insurance specifically required for the performance of a USDOT-assisted contract, provided the fees are reasonable and not excessive as compared with fees customarily allowed for similar services.

14.02 Effect of Loss of DBE Eligibility:

If a DBE or a DBE prime contractor is deemed ineligible, decertified, or suspended by the Department in accordance with 49 CFR Part 26.87 and 49 CFR Part 26.88, the following provisions shall apply:

- (A) If a DBE firm loses its DBE eligibility because the DBE firm was acquired by a non-DBE firm, no work performed by the DBE firm after the Decision Date will be counted toward DBE participation.
- (B) If a subcontract, contract, or supplier arrangement has been executed before the Decision Date, work performed by the DBE firm will be counted toward DBE participation.
- (C) If neither paragraph (A) nor paragraph (B) above applies, the work performed by the DBE firm after the Decision Date will be counted toward DBE participation.
- (D) If the contractor extends or adds work to the DBE firm's subcontract, that work will not be counted towards DBE participation unless the contractor has obtained prior approval from the Department for DBE credit. Any requests to extend or add work to the DBE firm's subcontract to count towards DBE participation shall be submitted using the request form, made available on BECO's website at <https://azdot.gov/business/business-engagement-and-compliance/dbe-contract->

compliance/contract-specs-and-forms, to extend Decertified DBE contract for DBE credit.

- (E) The Department will consent to such DBE credit only if the added work is within the foreseeable range of added work, given the circumstances of the original DBE contract.
- (F) For the purposes of this subsection, "Decision Date" means the date the Department notifies the DBE that it has become ineligible, decertified, or suspended under 49 CFR Part 26.87(c)(4), (g).

14.03 Notifying the Contractor of DBE Certification Status:

Each DBE contract of any tier shall require any DBE subcontractor or supplier that is either decertified or certified during the term of the contract to immediately notify the contractor and all parties to the DBE contract in writing, with the date of decertification or certification. The contractor shall require that this provision be incorporated in any contract of any tier in which a DBE is a participant.

14.04 Police Officers:

DBE credit will not be permitted for procuring DPS officers. For projects on which officers from other agencies are supplied, DBE credit will be given only for the broker fees charged, and will not include amounts paid to the officers. The broker fees must be reasonable.

14.05 Commercially Useful Function:

A prime contractor can credit expenditures to a DBE subcontractor only if the DBE performs a commercially useful function (CUF) on the contract.

In conformity with 49 CFR Part 26.55(c), a DBE performs a CUF when it is responsible for execution of the work of a contract and carries out its responsibilities by actually performing, managing, and supervising the work involved. To perform a commercially useful function, the DBE must also be responsible, with respect to materials and supplies on the contract, for negotiating price, determining quality and quantity, ordering the material, and installing (where applicable) and paying for the material itself that it uses on the project. To determine whether a DBE is performing a commercially useful function, the Department will evaluate the amount of work subcontracted, industry practices, whether the amount the firm is to be paid under the contract is commensurate with the work it is actually performing and the DBE credit claimed for its performance of the work, and other relevant factors.

A DBE will not be considered to perform a commercially useful function if its role is limited to that of an extra participant in a transaction, contract, or project through which funds are passed in order to obtain the appearance of DBE participation. In determining whether a DBE is such an extra participant, the Department will examine similar transactions, particularly those in which DBEs do not participate.

If a DBE does not perform or exercise responsibility for at least 30 percent of the total cost of its contract with its own work force, or if the DBE subcontracts a greater portion of the work

of a contract than would be expected within normal industry practice for the type of work involved, the Department will presume that the DBE is not performing a commercially useful function.

When a DBE is presumed not to be performing a commercially useful function as provided above, the DBE may present evidence to rebut this presumption. The Department will determine if the firm is performing a CUF given the type of work involved and normal industry practices.

The Department will notify the contractor, in writing, if it determines that the contractor's DBE subcontractor is not performing a CUF. The contractor will be notified within seven calendar days of the Department's decision.

Decisions on CUF may be appealed to the State Engineer. The appeal must be in writing and personally delivered or sent by certified mail, return receipt requested, to the State Engineer. The appeal must be received by the State Engineer no later than seven calendar days after the decision of BECO. BECO's decision remains in effect unless and until the State Engineer reverses or modifies BECO's decision. The State Engineer will promptly consider any appeals under this subsection and notify the contractor of the State Engineer's findings and decisions. Decisions on CUF matters are not appealable to USDOT.

The Department will conduct project site visits on the contract to confirm that DBEs are performing a CUF. The contractor shall cooperate during the site visits and the Department's staff will make every effort not to disrupt work on the project.

14.06 Trucking:

In conformity with 49 CFR Part 26.55(d), the Department will use the following factors in determining whether a DBE trucking company is performing a commercially useful function. The DBE must be responsible for the management and supervision of the entire trucking operation for which it is responsible on a particular contract.

The DBE must itself own and operate at least one fully licensed, insured, and operational truck used on the contract on every day that credit is to be given for trucking.

The contractor will receive credit for the total value of transportation services provided by the DBE using trucks it owns, insures and operates, and using drivers it employs.

The DBE may lease trucks from another DBE firm, including an owner-operator who is certified as a DBE. The DBE who leases trucks from another DBE receives credit for the total value of the transportation services.

The DBE may also lease trucks from a non-DBE firm, including an owner-operator. The DBE who leases trucks with drivers from a non-DBE is entitled to credit for the total value of the transportation services provided by non-DBE leased trucks with drivers not to exceed the value of transportation services on the contract provided by DBE-owned trucks or leased trucks with DBE employee drivers. Additional participation by non-DBE owned trucks with drivers receives credit only for the fee or commission paid to the DBE as a result of the lease agreement.

Example: DBE Firm X uses two of its own trucks on contract. It leases two trucks from DBE Firm Y and six trucks from non-DBE firm Z. DBE credit would be awarded for the total value of transportation services provided by Firm X and Firm Y, and may also be awarded for the total value of transportation services provided by four of the six trucks provided by Firm Z. In all, full credit would be allowed for the participation of eight trucks. DBE credit could be awarded only for the fees or commissions pertaining to the remaining trucks Firm X receives as a result of the lease with Firm Z.

The DBE may lease trucks without drivers from a non-DBE truck leasing company. If the DBE leases trucks from a non-DBE leasing company and uses its own employees as drivers, it is entitled to credit for the total value of these hauling services.

Example: DBE Firm X uses two of its own trucks on a contract. It leases three additional trucks from non-DBE Firm Z. Firm X uses its own employees to drive the trucks leased from Firm Z. DBE credit would be awarded for the total value of the transportation services provided by all five trucks.

For purposes of this section, a lease must indicate that the DBE has exclusive use of and control over the truck. This does not preclude the leased truck from working for others during the term of the lease with the consent of the DBE, so long as the lease gives the DBE absolute priority for use of the leased truck. Leased trucks must display the name and identification number of the DBE. DBE participation will be allowed only for those lease costs related to the time each truck is devoted to the project.

DBE credit for supplying paving grade asphalt and other asphalt products will only be permitted for standard industry hauling costs, and only if the DBE is owner or lessee of the equipment and trucks. Leases for trucks must be long term (extending for a fixed time period and not related to time for contract performance) and must include all attendant responsibilities such as insurance, titling, hazardous waste requirements, and payment of drivers.

14.07 Materials and Supplies:

In conformity with 49 CFR Part 26.55(e), the Department will credit expenditures with DBEs for material and supplies towards DBE participation as follows:

- (A) If the materials or supplies are obtained from a DBE manufacturer, 100 percent of the cost of the materials or supplies is credited.
 - (1) A DBE manufacturer is defined as: a firm that owns, or leases, and operates a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract, and of the general character described by the specifications.
 - (2) Manufacturing includes blending or modifying raw materials or assembling components to create the product to meet contract specifications. When a DBE makes minor modifications to the materials, supplies, articles, or equipment, the DBE is not a manufacturer. Minor modifications are additional changes to a

manufactured product that are small in scope and add minimal value to the final product.

- (B) If the materials or supplies are purchased from a DBE regular dealer, 60 percent of the cost of the materials or supplies, (including transportation costs), is credited.
- (1) A DBE regular dealer is defined as: a firm that owns, or leases, and operates, or maintains a store or warehouse or other establishment in which the materials, supplies, articles, or equipment of the general character described by the specifications and required under the contract are bought, kept in sufficient quantities, and regularly sold or leased to the public in the usual course of business.
 - (a) To be a regular dealer, the firm must be an established, regular business that engages, as its principal business and under its own name, in the purchase and sale or lease of the products in question.
 - (b) Items kept and regularly sold by the DBE are of the “general character” when they share the same material characteristics and application as the items specified by the contract.
 - (2) A firm may be a DBE regular dealer in such bulk items as petroleum products, steel, concrete or concrete products, stone or asphalt without owning and operating a place of business, as provided above, if the person both owns and operates distribution equipment used to deliver the products. Any supplementing of regular dealers’ own distribution equipment must be by a long-term operating lease, and not on an ad-hoc or contract-by-contract basis.
 - (3) A DBE supplier performs a CUF as a regular dealer and receives credit for 60 percent of the cost of materials or supplies, including transportation cost, when all, or at least 51 percent of, the items under a purchase order or subcontract are provided from the DBE's inventory, and when necessary, any minor quantities delivered from and by other sources are of the general character as those provided from the DBE's inventory.
 - (4) A DBE supplier of items that are not typically stocked due to their unique characteristics (e.g., limited shelf life or items ordered to specification) should be considered in the same manner as a regular dealer of bulk items as described above. If the DBE supplier of these items does not own or lease distribution equipment, as described above, it is not a regular dealer.
 - (5) Packagers, brokers, manufacturers’ representatives, or other persons who arrange, facilitate or expedite transactions are not regular dealers within the meaning of this paragraph and the paragraph above.
- (C) If the materials or supplies are purchased from a DBE distributor that neither maintains sufficient inventory nor uses its own distribution equipment for the products in question, 40 percent of the cost of materials or supplies (including transportation costs) count for credit.

- (1) A DBE distributor is defined as: an established business that engages in the regular sale or lease of the items specified by the contract. A DBE distributor assumes responsibility for the items it purchases once they leave the point of origin (e.g., a manufacturer's facility), making it liable for any loss or damage not covered by the carrier's insurance.
 - (2) A DBE distributor performs a CUF when it demonstrates ownership of the items in question and assumes all risk for loss or damage during transportation, evidenced by the terms of the purchase order or a bill of lading (BOL) from a third party, indicating Free on Board (FOB) at the point of origin or similar terms that transfer responsibility of the items in question to the DBE distributor.
 - (3) If paragraph (1) and paragraph (2), above, are met, DBE distributors may receive 40 percent for drop-shipped items.
 - (4) Terms that transfer liability to the distributor at the delivery destination (e.g., FOB destination), or deliveries made or arranged by the manufacturer or another seller do not satisfy this requirement.
- (D) With respect to materials or supplies purchased from a DBE which is neither a manufacturer, a regular dealer, nor a distributor, the following standards shall apply:
- (1) The Department will credit the entire amount of the fees or commissions charged by the DBE for: (1) assistance in the procurement of the materials and supplies, or (2) fees or transportation charges for the delivery of materials or supplies required on a job site, toward DBE participation.
 - (2) The Department will only credit the fees or commissions charged by the DBE if the Department determines the fees to be reasonable and not excessive as compared with fees customarily allowed for similar services.
 - (3) The cost of the materials and supplies themselves may not be counted toward DBE participation.
- (E) The Department will credit expenditures with DBEs for material and supplies (e.g. whether a firm is acting as a regular dealer, distributor or a transaction facilitator) towards DBE participation on a contract-by-contract basis.
- (F) The fact that a DBE firm qualifies under a classification (manufacturer, regular dealer, distributor or supplier) for one contract does not mean it will qualify for the same classification on another contract.
- (G) The bidder shall be responsible for verifying whether a DBE qualifies as a DBE manufacturer, regular dealer, distributor or supplier.
- (1) For each DBE firm listed as a regular dealer or distributor, the bidder must assess a DBE firm's eligibility for 60 or 40 percent credit, respectively, of the cost of materials and supplies based on its demonstrated capacity and intent to perform as a regular dealer or distributor.

- (2) To receive credit toward DBE participation, the bidder shall use and submit the form made available on BECO's website at <https://azdot.gov/business/business-engagement-and-compliance/dbe-contract-compliance/contract-specs-and-forms>, to affirm the DBE firm's capacity and intent to perform as a regular dealer or distributor.

15.0 Joint Checks:

15.01 Requirements:

A DBE subcontractor and a material supplier (or equipment supplier) may request permission for the use of joint checks for payments from the prime contractor to the DBE subcontractor and the supplier. Joint checks may be issued only if all the conditions in this subsection are met.

- (A) The DBE subcontractor must be independent from the prime contractor and the supplier, and must perform a commercially useful function. The DBE subcontractor must be responsible for negotiating the price of the material, determining quality and quantity, ordering the materials, installing (where applicable), and paying for the material. The DBE subcontractor may not be utilized as an extra participant in a transaction, contract, or project in order to obtain the appearance of DBE participation.
- (B) The use of joint checks will be allowed only if the prime contractor, DBE subcontractor, and material supplier establish that the use of joint checks in similar transactions is a commonly recognized business practice in the industry, particularly with respect to similar transactions in which DBE's do not participate.
- (C) A material or supply contract may not bear an excessive ratio relative to the DBE subcontractor's normal capacity.
- (D) There may not be any exclusive arrangement between one prime and one DBE in the use of joint checks that may bring into question whether the DBE is independent of the prime contractor.
- (E) Any arrangement for joint checks must be in writing, and for a specific term (for example, one year, or a specified number of months) that does not exceed a reasonable time to establish a suitable credit line with the supplier.
- (F) The prime contractor may act solely as the payer of the joint check, and may not have responsibility for establishing the terms of the agreement between the DBE subcontractor and the supplier.
- (G) The DBE must be responsible for receiving the check from the prime contractor and delivering the check to the supplier.
- (H) The prime contractor cannot require the DBE subcontractor to use a specific supplier, and the prime contractor may not participate in the negotiation of unit prices between the DBE subcontractor and the supplier.

15.02 Procedure and Compliance:

- (A) The Business Engagement and Compliance Office must approve the agreement for the use of joint checks in writing before any joint checks are issued. The prime contractor shall submit a DBE joint check request form, available from the BECO website, along with the joint check agreement, to BECO through email within seven calendar days from the time the subcontract is executed.
- (B) After obtaining authorization for the use of joint checks, the prime contractor, the DBE, and the supplier must retain documentation to allow for efficient monitoring of the agreement.
- (C) Copies of canceled checks must be submitted, with the payment information for the period in which the joint check was issued, electronically through email to BECO, and made available for review at the time of the onsite CUF review. The prime contractor, DBE, and supplier each have an independent duty to report to the Department in the case of any change from the approved joint check arrangement.
- (D) Any failure to comply will be considered by the Department to be a material breach of this contract and will subject the prime contractor, DBE, and supplier to contract remedies and, in the case of serious violations, a potential for termination of the contract, reduction or loss of prequalification, debarment, or other remedies which may prevent future participation by the offending party.

16.0 Certification of Final DBE Payments:

DBE participation on the contract is measured by actual payments made to the DBEs. The contractor shall submit the "Certification of Final DBE Payments" form for each DBE firm working on the contract. This form shall be signed by the contractor and the relevant DBE, and submitted to the Engineer no later than 30 days after the DBE completes its work.

The contractor will not be released from the obligations of the contract until the "Certification of Final DBE Payments" forms are received and deemed acceptable by the Engineer and BECO.

17.0 False, Fraudulent, or Dishonest Conduct:

In addition to any other remedies or actions, the Department will bring to the attention of the USDOT any appearance of false, fraudulent, or dishonest conduct in connection with the DBE program, so that USDOT can take steps such as referral to the Department of Justice for criminal prosecution, referral to the USDOT Inspector General for possible initiation of suspension and debarment proceedings against the offending parties or application of "Program Fraud and Civil Penalties" rules provided in 49 CFR Part 31.

GENERAL REQUIREMENTS:

BLM Material Sources:

If the contractor elects to pursue the use of material sources on BLM land under Title 30 Code of Federal Regulations, it is at the contractor's sole risk, and the Department bears no responsibility for any delays or costs associated with the request to use material sources on BLM Land.

The Department will not request or pursue any "free-use permit" under Title 23 Code of Federal Regulations or any other arrangement with BLM on this project.

No extension in contract time or compensation will be granted for any attempt by the contractor to utilize BLM land.

Use of Prohibited Products:

Effective immediately, the contractor shall not commit any of the following actions:

- (1) Deliver, install, or include any prohibited product under this contract
- (2) Propose to deliver, install, or include any prohibited product under this contract
- (3) Enter into a new contract to procure or obtain any prohibited product.

For the purpose of this Section, "Prohibited Product" is defined as any telecommunication or video surveillance equipment, systems, or services produced by:

- (1) Huawei Technologies Company
- (2) ZTE Corporation
- (3) Hytera Communications Corporation
- (4) Hangzhou Hikivision Digital Technology Company
- (5) Dahua Technology Company
- (6) Any subsidiary or affiliate of the entities mentioned herein

The contractor shall identify the known subsidiaries and affiliates of the aforementioned from the following website:

https://umd.servicenow.com/itsupport?id=kb_article_view&sysparm_article=KB0014132&sys_kb_id=28015b70dbe0e3849382f1a51d96193f

Environmental Commitments:

The contractor's commitments are identified in the Environmental, Permits, Issues, and Commitments (EPIC) Plan Sheet 1F. The contractor shall follow the requirements specified in the EPIC plan sheet 1F, Subsection 104.16 of the specifications and these Special Provisions.

In addition, the contractor shall pay attention to the project specific environmental commitments that are specified in Section 10 of the EPIC Plan Sheet 1F.

Transition of Select AASHTO Standard Test Method to Arizona Test Method Equivalent:

Whenever reference is made in the specifications to an AASHTO Test Method, the reference shall be construed to mean it's equivalent Arizona Test Method as listed in the table below.

TEST METHOD TRANSITION TABLE	
AASHTO Standard	Equivalent Arizona Test Method
R 66	103
R 97	104
R 90	105
T 11, T 27	201
T 85	210
T 84	211
T 335	212
T 99	225
	226
T 224	227
T 191	230
T 272	232
T 310	235
T 288, T 289	236
T 176	242
T 99	245
T 272	246
T 304 Method A	247
T 24	317
T 329	406
R 68, T 245	410
T 355	412
T 166	415
R 47	416
T 209	417
T 287	421
T 269	424
T 308	427
	428

(101DEFN, 04/21/22)

SECTION 101 DEFINITIONS AND TERMS:

101.02 Definitions:

Acceptance: of the Standard Specifications is hereby deleted:

Characteristic: of the Standard Specifications is revised to read:

A measurable or an observable property of a material, product, or item of construction.

City, County, Township, or Town: of the Standard Specifications is hereby deleted:

Contract Bonds (Performance Bond and Payment Bond): the title and text of the Standard Specifications is revised to read:

Contract Bonds:

Surety Bonds that include Performance Bond and Payment Bond.

Highway, Street, or Road: of the Standard Specifications is revised to read:

A general term denoting a public way for purposes of travel, vehicular, pedestrian or by other means, including the entire area within the right-of-way.

Roadbed: of the Standard Specifications is revised to read:

The graded portion of a highway, prepared as a foundation for the pavement structure and shoulders.

Roadside Development: of the Standard Specifications is revised to read:

Activities which provide for the preservation of landscape materials and features; the rehabilitation and protection against erosion of all areas disturbed by construction through seeding, sodding, mulching and the placing of other ground covers; or such planting and other improvements as may increase the effectiveness and enhance the appearance of the highway.

State: of the Standard Specifications is revised to read:

The State of Arizona, acting through its authorized representatives.

(102BID, 03/19/26)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS: of the Standard Specifications is revised to read:

102.01 Contract Documents:

(A) General:

The Contract Documents, including but not limited to Advertisement for Bids, Project Plans, and Proposal Pamphlets will be available in electronic format, on the ADOT Contracts and Specifications Group website. Any interested party may access the advertised Contract Documents.

(B) Advertisements for Bids:

The advertisement for bids may contain the following information:

- Programmed Amount,
- Project number and name of highway,
- Route number and mileposts,
- Date and time of opening of bids,
- Location of the project,
- General description of work,
- Specified contract time for completion of contract work,
- Statement of proposal requirements,
- Manner in which project plans and specifications may be obtained,
- Type and amount of proposal guaranty.

(C) Proposal Pamphlet:

The Proposal Pamphlet will include the location and general description of the contemplated construction, an approximate estimate of the quantities and types of work to be performed and/or materials to be furnished, a schedule of bid items for which unit prices are invited, the specified time for completion, any applicable Special Provisions or supplemental requirements, and all necessary bidding documents.

102.02 Prerequisites for Bidding:

(A) General:

To submit a valid bid, the bidder shall:

- (1) Have prequalification from the Department as necessary for the project, in accordance with Subsection 102.02(B) of the specifications; and
- (2) Be included on the project Plansholder List as a Prime in accordance with Subsection 102.02(C) of the specifications.

(B) Prequalification of Bidders:

Prior to submitting a bid, the bidder will (unless waived by the Department) be required to be prequalified with the Department to bid on the project. The submission of Prequalification information and determination of Prequalification shall be in accordance with the requirements of the Rules for Prequalification of Contractors as approved and adopted by the Department.

(C) Plansholder List:

It is the bidder's responsibility to ensure that their firm is on the Plansholder List as a Prime prior to submitting a bid.

Firms may register electronically requesting placement on the project Plansholder List as a Prime contractor as follows:

- (1) Go to the ADOT Contracts and Specifications Group Website;
- (2) Select "Current Advertisements";
- (3) Identify the project of interest;
- (4) Click on the "Register" icon;
- (5) Select the "Bidder" radio button;
- (6) Complete all required fields;
- (7) Click "Save". This submits the request to the Department; and
- (8) If all required information is provided, the "ADOT C&S Advertisement Registration Confirmation" Screen will appear. An email will also be sent to the email address provided acknowledging the receipt of the request.

Requests to be included on the Plansholder List as a Prime will be evaluated by the Department to determine whether the bidder is prequalified for the project. The Department cannot guarantee that requests to be on the Plansholder List will be considered if the request is submitted less than five working days prior to the bid opening. The Department will send an email to the email address provided notifying the contractor of the results of their request. The Department's email will state whether the request was approved or denied. More information regarding the Department's decision may be obtained by contacting the ADOT Contracts and Specifications Group.

If an individual from a firm submits a duplicate request to be placed on the Plansholder List, the request will be denied. The Department will register the contact person listed on the duplicate request to receive email notices of updates to the project. The Department will send an email to the email address provided notifying the contractor of the results of their request.

(D) Registration for Notifications:

Subcontractors, Vendor and other interested parties may electronically register to receive email notifications regarding updates or changes to specific advertised contracts.

To register:

- (1) Go to the ADOT Contracts and Specifications Group Website;
- (2) Select “Current Advertisements”;
- (3) Identify the project of interest;
- (4) Click on the “Register” icon;
- (5) Select the “Other” radio button, as applicable;
- (6) Select the “Yes” in response to the prompt “Are you interested in registering to be notified about any changes made to this advertisement?”;
- (7) Complete all required fields;
- (8) Click “Save”. This submits the request to the Department; and
- (9) If all required information is provided, the “ADOT C&S Advertisement Registration Confirmation” Screen will appear and a confirmation email will be sent to the email address provided.

All registered parties will receive notifications when changes are made to the associated contract advertisement.

102.03 Suspension from Bidding:

The Department may suspend any person and any subsidiary or affiliate of any person from further bidding to the Department and from being a subcontractor or a supplier or otherwise participating in the work:

- (A) If that person or any officer, director, employee or agent of that person is convicted, in this State, or any other jurisdiction, of a crime involving any of the following elements or actions:
 - 1) Entering into any contract, combination, conspiracy or other unlawful act in restraint of trade or commerce;
 - 2) Knowingly and willfully falsifying, concealing, or covering up a material fact by trick, scheme, or device;
 - 3) Making false, fictitious, or fraudulent statements or representations;

- 4) Making or using a false writing or document knowing it to contain a false, fictitious, or fraudulent statement or entry;
 - 5) Misrepresentation or false statement on any application for bonding;
 - 6) Misrepresentation or false statement on any application for prequalification;
- (B) If the Department makes a finding of any of the above or finds that the contractor is not a Responsible Bidder or a Responsible Contractor; or
- (C) If the Department determines that a contractor, subcontractor, or supplier has repeatedly or willfully failed to comply with federal or state immigration laws.

Under this subsection, a person means any individual, partnership, joint venture, corporation, association, or other entity formed for the purpose of doing business as a contractor, subcontractor, or supplier.

102.04 Availability of Documents:

The following documents, if applicable, will be available in electronic format on the ADOT Contracts and Specifications Group website:

- A. Project Plans.
- B. Advertisement for Bids.
- C. Proposal Pamphlet.
- D. Cross Sections.
- E. Earthwork Report.
- F. Other Available Reports.
- G. Existing Ground Digital Terrain Model (DTM).
- H. Design Ground Digital Terrain Model (DTM).
- I. Survey Control Sheet.

The project plans, proposal pamphlet, cross sections, earthwork report, survey control sheet, and any applicable reports are provided in PDF format. The Department makes no representation or warranties as to the compatibility, usability, or readability of the PDF documents with any system, software, hardware, or application package other than that on which the files were originally saved. The contractor bears the sole risk of any modifications, manipulations, or alterations to the plans, proposal pamphlet, and any applicable reports.

The existing ground DTM and the design DTM, if applicable, are provided in either DTM or DGN files for informational purposes only. The DTMs are not part of the contract documents. The contractor's use of the information in the DTMs is at the contractor's sole risk. The Department makes no representation or warranties as to the compatibility, usability, or readability of the DTMs with any system, software, hardware, or application package other than that on which the files were originally prepared. The version of Microstation used to save the DTMs is indicated at <https://azdot.gov/business/engineering-and-construction/computer-aided-design-and-drafting-cadd>.

The Department is providing the available electronic project documents to bidders for informational purposes in conjunction with work or services to be provided to the Department under the contract. Any use of the electronic files for any purposes other than for this project is prohibited.

102.05 Plansholder Eligibility:

The Department reserves the right to disqualify a prequalified contractor from being a Plansholder for any of the following reasons:

- (A) Lack of competency or adequate machinery, plant and other equipment, as revealed by the financial statement and experience questionnaires required under Subsection 102.02 of the specifications.
- (B) Incomplete work which, in the judgment of the Department, might hinder or prevent the prompt completion of additional work if awarded.
- (C) Failure to pay, or settle satisfactorily, all bills due for work on other contracts.
- (D) Failure to comply with any qualification regulations of the Department.
- (E) Default under previous contracts.
- (F) Unsatisfactory performance on previous work.
- (G) Entering into any contract, combination, conspiracy, or other unlawful act in restraint of trade or commerce.
- (H) Knowingly and willfully falsifying, concealing, or covering up a material fact by trick, scheme, or device.
- (I) Making false, fictitious, or fraudulent statements or representations.
- (J) Making or using a false writing or document knowing it to contain a false, fictitious, or fraudulent statement or entry.
- (K) Misrepresentation or false statement on any application for bonding.
- (L) Misrepresentation or false statement on any application for prequalification.
- (M) Lack of sufficient ability or integrity to complete the contract.

102.06 Interpretation of Quantities in Bidding Schedule:

The quantities appearing in the bidding schedule, except as provided elsewhere, are approximate only and are prepared for the comparison of bids. Payment to the contractor will be made only for the actual quantities of work performed and accepted or materials furnished in accordance with the requirements of the contract. The scheduled quantities of work to be

done and materials to be furnished may each be increased, decreased, or omitted as hereinafter provided in Subsection 104.02 of the specifications.

102.07 Examination of Plans, Specifications and Site of Work:

The bidder shall examine the site of the proposed work and the contract before submitting a Proposal. If no site investigation is performed, the bidder is responsible for all site conditions that should have been discovered had a reasonable site investigation been performed. The submission of a Proposal will be considered conclusive evidence that the bidder is satisfied with the conditions to be encountered in performing the work and as to the requirements of the proposed contract.

The bidder shall take no advantage of any apparent error or omission in the plans, bid schedule items, estimated quantities, specifications, or other contract documents. In the event the bidder discovers such an error or omission, the bidder shall immediately notify the Department. The Department will then make such corrections and interpretations as may be deemed necessary.

Any request for explanation of the meaning or interpretations of the contract shall be submitted in adequate time to allow a reply to reach all bidders before submission of their Bid Proposal. If the Department determines interpretations or explanations are warranted, the response will be issued, if necessary, through an addendum to the contract documents, and will be made available to all prospective bidders before the time set for opening of Proposals.

The Department will not be bound by any statement or representation concerning conditions or description of the work unless they are included in the contract. Oral explanations, interpretations, or instructions given before the opening of the bids by Department employees or agents are not binding.

102.08 Preparation of Proposal:

(A) General:

The bidder shall prepare and submit its proposal using Department-approved bid preparation software.

Proposals shall be prepared and submitted in accordance with the requirements of Subsection 102.08(B) of the specifications.

The bidder shall submit its proposal using the electronic bid process described herein.

(B) Electronic Submittal:

(1) General:

In order to submit a bid electronically, a firm shall have obtained a bidder identification number from the Department, at the office of ADOT Contracts and Specifications Group, 205 South 17th Avenue, Maildrop 121F, Phoenix, AZ 85007, phone (602) 712-7221.

In addition, bidders shall subscribe to Info Tech, Inc., doing business as Infotech's Bid Express® service at www.bidx.com, an online bidding service, and obtain an online Digital

ID. Bid Express can be reached at www.bidx.com, phone (888)-352-2439 and/or customer.support@bidx.com. The bidder shall also download and install a copy of the AASHTOWare Project Bids Bid Component from the internet at the Bid Express website. The version of the software currently used by ADOT can then be located by selecting the ADOT tab and the "AASHTOWare Project Bids" link under Downloads.

In order to obtain a Digital ID, bidders shall name at least one authorized signatory, as approved by the Department to commit the firm to the terms and conditions specified in the Proposal and the contract documents.

The bidder shall download the electronic copy of the project EBSX file, listed as an AASHTOWare Project Bids Data File on the Bid Express website. The file includes a schedule of items folder containing the bid schedule, a miscellaneous data folder containing the proposal and attachments, contractor authorization folder containing bidders's contact information, and a bid bond folder. The bidder shall review the proposal and complete the bidding schedule, as specified herein, and the attachments.

The bidder shall include with its bid an email address and recipient name as its contact information for the purpose of receiving the notice of award or other notices related to the bidding. The Department will send the notice of award, executed contract and other notices to the requested email address and recipient name.

It is the contractor's responsibility to provide the updated contact information to the Department if there are any changes to the above requested email address or recipient name prior to the award of the contract.

The bidder shall specify a unit price for each pay item for which a quantity is given in the bidding schedule. The software will automatically produce the extended amount, as the product of the quantity given and the specified unit price.

The bidder shall also download all addenda files issued and update the project file accordingly. The bidder shall be responsible for the successful submission of its electronic bid prior to the time specified for submission of bids. The bidder agrees that the Department bears no liability resulting from the bidder's failure to successfully submit an electronic bid.

(2) Procedure for Missing Bids:

If a bidder believes that its electronically submitted bid should have been read at the bid opening but was not read, the bidder shall notify the Department at CSGroup@azdot.gov of the apparent irregularity and provide its bid receipt for the bid in question no later than three hours after the time specified for submission of bids.

Upon proper notification of a missing bid by a bidder, the Department will notify all bidders that a missing bid has been reported. The Department will begin an investigation to determine the status of the bid, and will review all electronic bids received from Bid Express service.

The Department will direct Infotech to review their records and determine whether the missing bid was submitted. Infotech will make a determination about receipt of the bidder's missing bid.

If requested by the Department, Infotech will attempt to retrieve a copy of the encrypted bid from the bidder's computer.

The Department will partner with Infotech and implement best practices to configure the Bid Express service to decrypt the bid.

If the Department determines that a bid cannot be recovered, the Department will notify all bidders of its determination.

If a missing bid is recovered, the Department will determine the validity of the bid, and may recommend award of the contract to the bidder submitting the missing bid if appropriate. The Department will notify all bidders.

102.09 Non-Collusion Certification:

By submission of its bid electronically, the bidder makes the certification stated in the following paragraph, binding as if it had been signed by the bidder.

The bidder certifies that, pursuant to Subsection 112(c) of Title 23, United States Code and Title 44, Chapter 10, Article 1 of the A.R.S, neither it nor anyone associated with the company, firm, corporation, or individual has, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with the submitted bid.

102.10 Irregular Proposals:

- (A) Proposals may be considered irregular and may be rejected for any of the following reasons:
 - (1) If there is a submission of any kind which may tend to make the proposal incomplete, indefinite or ambiguous as to its meaning.
 - (2) If the bid is mathematically unbalanced.
 - (3) If the bid is materially unbalanced.
- (B) Proposals will be considered irregular and will be rejected for any of the following reasons:
 - (1) If the bidder or surety fails to provide a proposal guaranty as specified in Subsection 102.11 of the specifications.
 - (2) If the bidding schedule does not contain a unit price for each pay item listed.
 - (3) If the bidder fails to meet the required goal for Disadvantaged Business Enterprises (DBE) established in the Special Provisions or show good faith effort as determined by the Department.

102.11 Proposal Guaranty:

The bidder shall provide an electronic proposal guaranty payable to the Arizona Department of Transportation for 10 percent of the amount of the bid.

The surety (bid) bond shall be executed by the bidder and a surety company or companies holding a certificate of authority to transact surety business in this State issued by the Director of the Department of Insurance. The agent for the surety shall be licensed to act as an insurance agent in Arizona.

Bidders shall provide an electronic proposal guaranty as described herein.

Two companies have established web-based surety processing procedures with Bid Express: Surety 2000 (<https://surety2000.com/>) and Sure Path Network (<http://web.insurevision.com/>). Bidders may contact these companies for additional information and requirements on electronic proposal guaranty.

102.12 Withdrawal of Proposals:

(C) General:

A bidder may withdraw its electronic submittal at a minimum 30 minutes prior to the time specified for bid opening in writing to the Contracts and Specifications Manager through the Contract and Specifications Group email at CSGroup@azdot.gov.

(D) Conditional Withdrawal:

When proposals for more than one contract are to be publicly read on any one date, a bidder may request in the event it is the apparent low bidder on a given contract or contracts, that one or more subsequent bids be withdrawn.

The bidder shall submit a written request for conditional withdrawal to the Contracts and Specifications Group Manager via email at CSGroup@azdot.gov a minimum of 30 minutes prior to the specified bid opening time.

102.13 Combination or Conditional Proposals:

At the Department's discretion, proposals may be issued for projects either separately or in combination. Bidders may submit bids for the combination or for individual units within the combination, as allowed in the proposal. The Department reserves the right to award contracts based on separate or combination bids, whichever is most advantageous to the state. Only combination bids specifically authorized in the Department's proposal will be considered.

102.14 Public Opening of Proposals:

Proposals will be opened and read aloud at the time indicated in the advertisement for bid.

Bidders, their authorized agents and other interested parties may attend the bid opening while they are read aloud. After the completion of the bid opening, the as-read bid results will then be made available through the ADOT Contracts and Specifications Group website.

102.15 Licensing:

It is the responsibility of the bidder to determine whether it has the appropriate contracting licenses to perform the work. For all projects except Federal-aid funded projects, the bidder shall have the proper licenses at the time of bid opening. The successful bidder's failure to meet with the necessary license requirements at the time of bid opening will result in the rejection of the bid.

On Federal-aid funded projects, the bidder is not required to have the licenses at the time of bidding, but it must procure the licenses from the State Registrar of Contractors, in accordance with A.R.S. 32 1101 et seq. before award can be made, and no later than 60 days after the date bids are opened. The bidder's failure to get the necessary licenses within 60 days after the bid opening date will result in rejection of the bid.

Licensing information is available from:
Arizona Registrar of Contractors
1700 W. Washington St. Suite 105
Phoenix, AZ 85007-2812
Phone: (602) 542-1525
Email: Webmaster@azroc.gov
www.roc.az.gov

102.16 Boycott of Israel:

All bidders are required to certify in their bid proposal on the "Participation in Boycott of Israel Certification" form either:

- (A) The bidder does not participate in, and agrees not to participate in during the term of the contract, a boycott of Israel in accordance with ARS 35-393.01; or
- (B) The bidder does participate in a boycott of Israel as defined in ARS 35-393.01.

The Department will not recommend award of the contract unless the bidder makes the certification described in subparagraph (A) of this Subsection.

102.17 Forced Labor of Ethnic Uyghurs Ban:

All bidders are required to certify in their bid proposal on the "Forced Labor of Ethnic Uyghurs Ban Certification Form" either:

- (A) The bidder does not use the Forced labor of Ethnic Uyghurs as described in A.R.S. 35-394; or
- (B) The bidder does use the Forced labor of Ethnic Uyghurs as described in A.R.S. 35-394.

The Department will not recommend award of the contract if the bidder makes the certification described in subparagraph (B) of this Subsection, unless the bidder uses an exempt contractor.

For the purposes of this subsection, a contractor is defined as an exempt contractor if it is a sole proprietorship; has fewer than 10 employees; and/or is a non-profit organization.

(102NOBID, 09/19/12)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS:

102.03 Suspension from Bidding: of the Standard Specifications is modified to add:

The signature of the bid proposal by a bidder constitutes the bidder's certification, under penalty of perjury under the laws of the United States, that the bidder, or any person associated therewith in the capacity of owner, partner, director, officer, principal investor, project director, manager, auditor, or any position involving the administration of federal funds, has not been, or is not currently, under suspension, debarment, voluntary exclusion or been determined ineligible by any federal agency within the past three years. Signature of the bid proposal also certifies, under penalty of perjury under the laws of the United States, that the bidder does not have a proposed debarment pending. In addition, signature of the bid proposal certifies that the bidder has not been indicted, convicted, or had a civil judgment rendered against (it) by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past three years.

Any exceptions to the above paragraph shall be noted and fully described on a separate sheet and attached to the bid proposal.

(102LOBY, 01/21/21)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS:

102.09 Non-Collusion Certification: of the Standard Specifications is modified to add:

(A) Lobbying:

The bidder certifies, by signing and submitting this bid or proposal, to the best of its knowledge and belief, that:

- (1) No Federally appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into any cooperative agreement, and the

extension, continuation, renewal, amendment, or modification of any Federal contract grant, loan, or cooperative agreement.

- (2) If any funds other than Federally appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions. Copies of Form-LLL, "Disclosure Form to Report Lobbying", are available at ADOT Contracts and Specifications Group, 205 South 17th Avenue, Room 121F, Phoenix, AZ 85007.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

The bidder also agrees, by submitting the bid or proposal, that it shall require that the language of this certification be included in all subcontracts and lower tier subcontracts which exceed \$100,000 and that all such subcontractors and lower tier subcontractors shall certify and disclose accordingly.

The Department will keep the prime contractors' certifications on file as part of their original bid proposals. Each prime contractor shall keep individual certifications from all subcontractors and lower tier subcontractors on file. Certifications shall be retained for three years following completion and acceptance of any given project.

Disclosure forms for the prime contractor shall be submitted to the Engineer at the pre-construction conference. Disclosure forms for subcontractors and lower tier subcontractors shall be submitted to the Engineer by the prime contractor along with the submittal of each subcontract or lower tier subcontract, as required under Subsection 108.01, when said subcontracts exceed \$100,000.00. During the performance of the contract the prime contractor and any affected subcontractors shall file revised disclosure forms at the end of each calendar year quarter in which events occur that materially affect the accuracy of any previously filed disclosure form. Disclosure forms will be submitted by the Engineer to the Federal Highway Administration for further processing.

(103AWARD, 09/17/20)

SECTION 103 AWARD AND EXECUTION OF CONTRACT:

103.04 Award of Contract: of the Standard Specifications is modified to add:

The Department will make the award to the lowest responsible bidder who has the proper licenses.

When a contract is funded, either wholly or in part, by federal funds, an award of contract may be made contingent upon the successful bidder obtaining an appropriate license in accordance with the requirements of Subsection 102.16 of the specifications. The license must be obtained within 60 calendar days following opening of bid proposals. No adjustment in proposed bid prices or damages for delay will be allowed as a result of any delay caused by the lack of an appropriate license.

Failure to acquire the necessary licensing within the specified period of time shall result in either award to the next lowest responsible bidder, or re-advertisement of the contract, as may be in the best interests of the Department.

(104TPDDC, 08/21/25)

SECTION 104 SCOPE OF WORK:

104.04 Maintenance of Traffic: of the Standard Specifications is modified to add:

Prior to construction, alterations to contract phasing, detours, and Maintenance and Protection of Traffic plans shall be reviewed by the Engineer at the preconstruction conference or a pre-activity meeting based on the contractor's preliminary schedule and proposed contract phasing.

SECTION 104 SCOPE OF WORK:

104.04 Maintenance of Traffic: of the Standard Specifications is modified to add:

(D) General Traffic Control Information:

The project shall be constructed in accordance with the most recent versions of Part VI of the Manual on Uniform Traffic Control Devices (MUTCD), 11th Edition, with the Arizona Supplement to the MUTCD, the 2025 Arizona Department of Transportation Traffic Control Design Guidelines (TCDG), and the traffic control plans. The contractor is responsible for establishing the traffic control necessary to provide a safe and efficient work zone without unduly delaying traffic. Alterations and modifications to the traffic control plans and specifications will be considered if they conform to the references listed above. Any changes or revisions to the traffic control requirements in the traffic control plans and specifications must be approved in advance by the Engineer.

The contractor shall develop and submit a Traffic Control Plan for the Engineer's review and approval, in accordance with Subsection 105.03 and Section 701 of the specifications and specified herein.

The temporary removal or covering of existing signs shall be in accordance with Section 701-3.11 and 701-5.10 of the specifications. All covered signs shall be uncovered as necessary to restore the existing or needed traffic control after the work activities are completed.

Temporary traffic control devices shall not be set up in advance of a closure unless approved by the Engineer. Traffic control devices shall be installed at the beginning of a nighttime or weekend closure and shall be entirely removed from the roadway and shoulders prior to the end of the closure. The contractor shall not stockpile or store traffic control devices at any time in the shoulders or roadway slopes.

For each changeable message board used on the project but not located in a protected location behind guardrail or another barrier, the contractor shall position ten Type I or Type II barricades, but not vertical panels around the changeable message board. Each barricade shall have an affixed Type C steady-burning light for nighttime use. The contractor shall position changeable message boards and the barricades surrounding them only where and when approved by the Engineer.

The contractor shall be required to check on all traffic control barricades, signs, and variable message boards twice daily and maintain as needed per the specifications.

(E) Schedules for Daily Traffic Control Activities:

The contractor shall provide a schedule of daily activities and corresponding traffic control plans in advance or during the weekly construction meeting in accordance with Subsection 108.04 of the specifications. The schedule shall specify the limits of the work activities and related traffic control plan by location, direction, and time.

The schedule and the related traffic control shall be developed in such a way that access or alternative access is maintained at all times to all adjacent residential developments, commercial, and public rights of way. The schedule should be developed in such a manner that it can be released to other agencies and the public. The schedule shall be updated as necessary.

(F) Traffic Control Plan (TCP):

No work shall begin until written approval of a TCP is received from the Engineer. The listed items in the specifications are not all inclusive and it shall be incumbent upon the contractor to provide details that will allow a full analysis of its particular operations.

All lane restrictions and closures will be subject to the following:

- No full closures of SR 89A, Page Springs Road, or local roads will be permitted unless approved by the Engineer. The contractor shall maintain the existing number of lanes on SR 89A and on local roads at all times, except during approved restrictions or closures.

- Any work requiring a closure will need to have the TCP reviewed and approved by the Engineer a minimum of 10 working days in advance of the closure. All shall adhere to the specified times shown in the following table.

Allowable Road Closure Periods	
SR 89A	Weekdays (Monday – Friday)
One Lane Closure (Northbound and/or Southbound)	6:00AM to 7:00PM

- Any exceptions or modifications to the approved TCP must be reviewed and re-approved by the Engineer prior to placement of traffic control equipment.
- The contractor shall also coordinate all project traffic control closures with the contractors on adjacent projects and in accordance with Subsection 105.09 of the specifications. The contractor shall coordinate all project traffic control closures with Yavapai County to avoid conflicts with local projects.

Special Events:

The contractor is advised that ADOT may receive advance notice of special events which may affect closures. The contractor shall adjust the construction schedule accordingly.

There will be no partial or full closures on SR 89A or on any local roads allowed when a special event is occurring.

Holidays:

There will be no lane closures allowed on holidays or weekends which adjoin a holiday. The restricted holidays include:

- New Year's Day
- Civil Rights Day
- Presidents' Day
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day
- Veterans Day
- Thanksgiving Day
- Christmas Day

(G) Project Specific Traffic Control Requirements:

The contractor shall install advance warning signing per the project plans.

For milling the existing AR-ACFC, the contractor shall set up traffic control per Figure SA-5R or Figure SA-5L in the ADOT TCDG. Access to Page Springs Road should be maintained via the existing left-turn lanes. Vertical panels shall be installed at spacing per MUTCD guidance based on posted speed limit.

For construction of the north and south U-turn movements, the northbound SR 89A inside widening, and the southbound SR 89A inside widening north of the existing intersection, the contractor shall set up traffic control per Figure SA-5L in the ADOT TCDG. Access to Page Springs Road should be maintained via the existing left-turn lanes. Vertical panels shall be installed at spacing per MUTCD guidance based on posted speed limit.

For construction of the northbound SR 89A outside widening, the contractor shall set up traffic control per Figure SA-5R in the ADOT TCDG. Access to Page Springs Road should be maintained via the existing left-turn lanes. Vertical panels shall be installed at spacing per MUTCD guidance based on posted speed limit.

For construction of the northbound and southbound inside lane widening at the existing SR 89A and Page Springs Road intersection, the contractor shall set up traffic control per SA-5L in the ADOT TCDG. During AC pavement removal and construction at the existing SR 89A and Page Springs intersection, westbound to southbound left-turns shall be detoured to the Angel Valley Road intersection and southbound to eastbound left-turns shall be detoured to the Spring Creek Ranch Road intersection.

For placement of final pavement markings, the contractor shall set up traffic control per Figures SA-19D and SA-19E in the ADOT TCDG. Shadow vehicles shall be equipped with a truck mounted attenuator.

For installation of new signs, the contractor shall set up traffic control per MUTCD TA-4.

(104SWDEQ, 02/10/20)

SECTION 104 SCOPE OF WORK:

104.09 Prevention of Stormwater Pollution: of the Standard Specifications is revised to read:

(A) General:

The contractor shall follow the requirements of Section 402 of the Clean Water Act (CWA), 33 USC 1251 and other water quality regulations. The CWA regulates discharge of pollutants into the waters of the United States and provides quality standards for surface waters. Section 402 of the CWA provides stormwater pollution prevention regulations. ADEQ's Aquifer Protection Permit (APP) Program regulates temporary concrete washout facilities. The APP Type 1 Permit (APP 1.12) applies only when projects disturb one or more acres and are covered under the Arizona Department of Environmental Quality Construction General Permit.

The contractor shall minimize ground disturbance to the natural surroundings. No ground disturbing activities shall occur until all applicable permits have been obtained. The applicable permit requirements must always be met.

The contractor shall provide adequate information to the contractor's personnel, including employees of any subcontractors, to ensure that all personnel understand requirements of the applicable permits that are relevant to their job functions.

(B) Clean Water Act, Section 402, Arizona Pollutant Discharge Elimination System (AZPDES):

(1) General Requirements:

The contractor shall be responsible for preparing and processing all documents and implementing the requirements of the Arizona Pollutant Discharge Elimination System (AZPDES) "General Permit for Discharge from Construction Activities to the Waters of the United States," for pollution prevention issued by the Arizona Department of Environmental Quality (ADEQ). That document is hereinafter referred to as the Construction General Permit (CGP) and is available on ADEQ's website.

The work shall include providing, installing, and maintaining, temporary and permanent pollution prevention control measures and removing and disposing of temporary pollution prevention control measures. Control Measures, as hereinafter referenced, shall be deemed to include pollution prevention control as described in the CGP. Control Measures may be temporary or permanent.

The contractor's schedule shall allow sufficient time for the following submittal, review, and approval times:

Table 104-1 Submittal, Review, and Approval Timeframes	
Contractor submittal of Erosion Control Coordinator (ECC) qualifications	By the pre-construction conference
Department review and approval of ECC qualifications	within seven calendar days of receipt
Department review and approval of subsequent submittals (if required)	within seven calendar days of receipt
Contractor submittal of SWPPP to Engineer	By the pre-construction conference
Department review and approval of subsequent submittals (if required)	within seven calendar days of receipt
Engineer/contractor joint review of SWPPP	within 10 calendar days after contractor submittal of SWPPP with ADOT approval of the ECC
Approved Notice of Intent (NOI) submittal and review times	as described in the CGP

No increase in contract time will be granted for the contractor's failure to provide acceptable submittals within the specified timeframes.

(2) Stormwater Pollution Prevention Plan (SWPPP):

The SWPPP shall include all information and permit requirements specified in the CGP, and shall also be consistent with applicable state or local programs.

Unless otherwise approved by the Engineer and documented in the SWPPP, the contractor shall not expose a surface area of greater than 750,000 square feet to erosion through clearing and grubbing, or excavation and filling operations within the project limits until temporary or permanent Control Measures for that portion of the project have been installed and accepted by the Engineer.

The contractor shall indicate each 750,000 square-foot sub-area in the SWPPP, along with proposed Control Measures for each sub-area. The SWPPP shall also include the sequence of construction for each sub-area, and installation of the required temporary or permanent Control Measures.

The contractor shall give installation of permanent Control Measures priority over reliance on temporary measures. Permanent Control Measures and drainage structures shall be installed as soon as possible in the construction sequencing of the project, preferably concurrent with construction of the related sub-area or drainage device.

The project plans may include erosion/sediment control plans and details along with a Control Measure Index Sheet (CMIS) to assist the contractor in preparing the SWPPP. The contractor and the contractor's ECC, or other qualified designee, as described in Subsection 104.09(B)(3), shall review the contract documents, and prepare the SWPPP for review by the Engineer. The contractor shall use the Department's SWPPP Template to prepare the SWPPP. The template is available on the Department's Water Resources website.

The SWPPP shall specify the mechanism whereby revisions may be proposed by the contractor or the Engineer throughout the project and incorporated into the plan, including the review and approval procedure. The Engineer and contractor shall jointly approve and sign each revision to the SWPPP before implementation. Any revisions made by the contractor to amend the approved SWPPP will require two to seven calendar days for review.

The contractor shall prepare the SWPPP for the Engineer's review including all information specified herein. The contractor shall submit the SWPPP to the Engineer at the preconstruction conference.

Within 10 calendar days of the SWPPP submittal, the Engineer and contractor will jointly review the contractor's SWPPP. The contractor shall include any additional revisions directed by the Engineer. The SWPPP shall meet the terms and conditions of the CGP and be compatible with construction sequencing and maintenance of traffic plans.

When agreement has been reached, the Engineer and contractor's ECC will sign the SWPPP. The Engineer's signature will constitute approval of the SWPPP. Upon approval of the SWPPP, the contractor and the Engineer shall each file a Notice of Intent (NOI) as specified in Subsection 104.09(B)(6). The Engineer will provide a copy of the Department's NOI to the contractor to be included in the SWPPP.

The SWPPP shall be maintained in accordance with the CGP. A current copy shall be maintained at a location approved by the Engineer and amended as necessary from the time the contractor files its NOI until the NOT is submitted. The SWPPP shall be available for inspection by entities identified in the CGP, and for use by the Engineer.

No condition of the CGP or the SWPPP shall release the contractor from any responsibilities or requirements under other environmental statutes or regulations.

In accordance with the CGP, the Engineer and the contractor shall confirm the frequency of inspections appropriate for the project. The contractor shall identify the frequency in the SWPPP. The contractor shall inform the Engineer when each inspection will be performed a minimum of 72 hours in advance so the Engineer can jointly perform the inspection if desired.

The contractor shall monitor rainfall on the site with a commercially manufactured rain gauge accurate to within 0.10 inches of rain. Rainfall records shall be maintained in the SWPPP.

(3) Erosion Control Coordinator (ECC):

The contractor shall designate an erosion control coordinator (ECC) to be responsible for approval and implementation of the SWPPP, as well as all other applicable requirements of the CGP. The contractor's ECC shall have the qualifications described in Subsection 104.09(B)(4).

The contractor shall not assume that the person proposed as ECC will be accepted by the Department merely because the experience and education requirements listed herein have been met.

After approval, the contractor shall designate the ECC as a duly authorized representative of the contractor in accordance with, and as defined in, the CGP. Documentation of the delegation of a duly authorized representative shall be included as part of the SWPPP.

The ECC shall be capable of identifying existing and predictable effects of the contractor's operations, and shall have complete authority to direct the contractor's personnel and equipment to implement the requirements described herein, including prompt placement of corrective measures to minimize or eliminate pollution and damage to downstream watercourses. Corrective measures shall be completed in the timeframe required by the CGP and included in the SWPPP as required by the CGP.

The ECC shall at all times be aware of the contractor's work activities, schedule, and effect of the work on the environment. Should the ECC not be present at the project site on a full-time basis, the contractor shall establish procedures to ensure that its ECC is promptly notified of any damage or displacement of the required erosion control measures, whether from construction, vandalism, or other causes.

The contractor bears all risks and liabilities for the failure of its ECC to properly implement the requirements of the CGP.

Failure of the contractor to properly maintain the Control Measures required in the approved SWPPP may be cause for the Engineer to reject the ECC and issue a stop work order, as specified in Subsection 104.09(B)(7).

(4) ECC Certification Requirements:

The ECC shall have successfully completed the mandatory two-day (16 hour) "Erosion Control Coordinator" training class (hereinafter referred to as the training class) provided by the Associated General Contractors (Arizona Chapter), phone (602) 252-3926. No other training can be substituted.

The training class certification is valid for three years. Within 60 days of the end of the three year period, in order to maintain the training class certification, the ECC shall successfully complete either a six-hour "Erosion Control Coordinator Refresher" class (hereinafter referred to as the refresher class), also provided by the Associated General Contractors (Arizona Chapter), or the two-day training class specified above. The refresher class will be required every three years thereafter, prior to the expiration date listed on the previous certificate. Should more than three years (and 60 day grace period) elapse from completion of either the training class or refresher class, the contractor's ECC will be required to successfully complete the two-day training class in order to again be eligible for consideration.

In addition, the contractor's ECC shall have documented experience equal to a minimum of one year from either of the following two categories:

- (a) Experience in the implementation of SWPPPs. The ECC's experience shall demonstrate full-time responsibility for directly supervising construction personnel in the installation, inspection, and maintenance of pollution prevention measures.
- (b) Experience in stabilization of disturbed areas in environments similar to those on the project.

The contractor's documentation shall provide details indicating the types of relevant experience and shall provide the number of months of each type of experience to be considered for approval.

The contractor's documentation shall also indicate that the proposed ECC has completed the training class or refresher class. To be considered for approval, the contractor's documentation shall include a copy of the proposed ECC's certification.

(5) Acceptance of ECC and SWPPP:

The contractor shall submit documentation indicating the qualifications of the ECC to the Engineer for approval no later than the pre-construction conference. The Engineer will review the proposed candidate's information within seven calendar days. The contractor may begin development of the SWPPP prior to approval of the ECC. However no clearing, grubbing, earthwork, or other work elements that may be subject to the requirements of the CGP shall be started until the ECC has been approved, the SWPPP finalized and implemented, the NOI completed and filed, and the CGP authorization received by the contractor and the Engineer.

If sampling is required, the SWPPP and SAP shall also be reviewed and approved by ADEQ prior to ground disturbance by the contractor.

(6) Notice of Intent:

After the project SWPPP has been approved by the Engineer, the Engineer and the contractor will each complete separate Notice of Intent (NOI) forms for the project. The contractor shall submit the NOI to ADEQ as required by the CGP.

Unless notified otherwise by ADEQ, the contractor will be authorized to begin implementation of the approved SWPPP seven calendar days after acknowledgement of receipt of both NOIs by ADEQ or whenever an authorization certificate is issued by ADEQ, whichever occurs first.

(7) Non-Compliance:

The Engineer may reject the contractor's ECC if, in the opinion of the Engineer, the conditions of the CGP or the SWPPP are not being fulfilled. Rejection of the contractor's ECC shall be for failure to complete any of the following:

- (a) Should the Engineer determine that the SWPPP is not being properly implemented; the contractor will be notified in writing of such deficiencies. The contractor's ECC shall fully implement, to the satisfaction of the Engineer, the requirements of the approved SWPPP within three working days.
- (b) Should any corrective measures required in the CGP not be completed within the time periods specified therein, the Engineer will notify the contractor in writing. The contractor's ECC shall complete all required corrective measures within two calendar days of such notification, except that direct inflows of sediment into a watercourse shall be corrected within 24 hours.
- (c) Should the Engineer determine that routine maintenance of the project's Control Measures is not being adequately performed; the contractor will be notified in writing. Within three working days, the contractor's ECC shall demonstrate, to the satisfaction of the Engineer that such steps have been taken to correct the problem.

In the event of the ECC's failure to comply with the CGP or any of the above requirements, the Engineer will direct the contractor to stop all affected work and propose a new ECC as soon as possible. However, all Control Measures specified in the SWPPP shall be maintained at all times. No additional work on construction items affected by the SWPPP will be allowed until a new ECC has been approved by the Engineer. The contractor will not be allowed compensation or an extension of contract time for any delays to the work because of the failure of the contractor's ECC to properly fulfill the requirements of the SWPPP.

(8) Notice of Termination:

Upon written approval of the Engineer, the contractor shall complete and submit a Notice of Termination (NOT) to the Engineer for approval. After approval by the Engineer, the contractor shall submit the NOT to ADEQ.

The NOT shall be submitted as described in the CGP.

A copy of the SWPPP and the NOT shall be provided to the Engineer within seven days of the contractor receiving acknowledgement from ADEQ. The copies may be either electronic or hard copies.

(C) Aquifer Protection Requirements (Concrete Washout Facilities):

If the contractor's work requires the use of temporary concrete washout facilities, the contractor shall comply with the requirements of ADEQ's APP Type 1 Permit (APP 1.12). APP 1.12 covers wastewater to an impoundment from washing concrete from trucks, pumps, and ancillary equipment. The contractor shall address concrete washout activities in the project SWPPP.

(D) Measurement and Payment:

Measurement and payment for work specified in the SWPPP will be made in accordance with the requirements of Section 810. Control Measures specified in the contract which are to be accomplished under any of the other various contract items will be paid for as specified under those items.

If a force account pay item for Control Measures is included in the bidding schedule, the contractor may be reimbursed for such additional Control Measures proposed by the contractor but not included with the plans or specifications. Such additional Control Measures must be approved in writing by the Engineer before use. Items for Control Measures approved by the Engineer will be paid in accordance with Subsection 109.04(D). No measurement or payment will be made for such additional items not approved by the Engineer.

No measurement or payment will be made to the contractor for time spent in preparing, reviewing, and revising the SWPPP, the SAP, or providing other required documentation, the cost being considered as included in the price of contract items. No measurement or payment will be made for inspections, training of personnel, the contractor's erosion control coordinator, the contractor's pollution prevention practices and requirements, or maintenance of the Control Measures during a suspension of work, the costs being considered as included in contract items.

No measurement or payment will be made, except as specified below for external laboratory testing, for labor, equipment, and materials required in the SAP, the cost being considered to be included in contract items.

If an item is included on the bidding schedule for Construction Monitoring (Laboratory Testing), the contractor will be reimbursed for those samples tested, as required in the

approved SAP, by an accredited laboratory approved by the Arizona Department of Health Services. The contractor will be reimbursed for the invoice amount of each required test, plus an additional markup of ten percent of the invoice amount. No measurement or payment will be made for in-field testing and related equipment, the cost being considered to be included in contract items.

No measurement or payment will be made for temporary concrete washout facilities, the cost being considered to be included in contract items.

Unless otherwise specified, no measurement or payment will be made for maintenance of temporary and permanent Control Measures, the cost being considered as included in contract items.

104.10 Contractor's Responsibility for Work: of the Standard Specifications is revised to read:

The contractor shall implement the requirements of the CGP for pollution prevention due to stormwater runoff during construction, as specified above in Subsection 104.09, Prevention of Stormwater Pollution.

Until final written acceptance of the project by the Engineer, the contractor shall have the charge and care thereof and shall take every precaution against injury or damage to any part thereof by the action of the elements, or from any other cause, whether arising from the execution or from the nonexecution of the work. The contractor shall rebuild, repair, restore and make good all injuries or damages to any portion of the work occasioned by any of the above causes before final acceptance. No reimbursement shall be made for work necessary due to the contractor's failure to comply with the requirements of the SWPPP.

Except as specifically provided under Subsection 104.04, in case of suspension of work from any cause whatever, the contractor shall be responsible for the project and shall take such precautions as may be necessary to prevent damage to the project and provide for normal drainage. The contractor shall maintain Control Measures in working order during any stoppage of work. Based on the nature of the work stoppage, the contractor and the Engineer shall determine the maintenance requirements. The contractor shall comply with the CGP including inspection of the project.

(104STORM, 11/01/95)

SECTION 104 SCOPE OF WORK:

104.11 Damage by Storm, Flood or Earthquake: Item (D), Idled Equipment and Remobilization, of the Standard Specifications is hereby deleted.

104.11 Damage by Storm, Flood or Earthquake: Items (E) and (F) of the Standard Specifications are revised to read:

(D) Payment for Repair Work:

The State will pay the cost of the repair work as determined in Subsection 109.04.

(E) Termination of Contract:

If the Department elects to terminate the contract, the termination and the determination of the total compensation payable to the contractor shall be governed by the provisions of Subsection 108.11, Termination of Contract for Convenience of the Department.

(104ENVIR, 06/17/21)

SECTION 104 SCOPE OF WORK:

104.12 Environmental Analysis: the fifth and sixth paragraphs of the Standard Specifications are revised to read:

If the contractor elects to do an environmental analysis and use any site, source, or access for the reasons listed above, they choose to do so at their own risk. It is the contractor's responsibility to exercise due diligence when selecting these sites and areas. The contractor shall bear all costs associated with the use of proposed sites, sources, and accesses.

The contractor shall promptly advise the Engineer that it is preparing the environmental analysis and shall submit to the Engineer for review and consultation. The Department will review the submittal and send it to the appropriate agencies and/or jurisdictions for consultation or return it to the contractor for revision. The contractor shall allow a minimum of 60 calendar days after submittal, or subsequent resubmittals, to the Department for the Department to review the environmental analysis and to consult with the appropriate jurisdictions and/or agencies. At the end of the review period, the Engineer will notify the contractor whether or not the environmental analysis is acceptable.

If the approval of the environmental analysis causes a delay to a controlling activity of the project due to the Department's actions in the aforementioned review process, the contractor may seek, and the Engineer may grant, an extension of time in accordance with the terms of Subsection 108.08 of the specifications. The time extension shall not exceed 30 working days for a working-day contract, or 45 calendar days for a calendar-day project. The time extension will not be considered unless the contractor can show evidence of the delay resulting due to the Department's actions in the review process. A time extension request will not be

considered or granted for any other reason. No time extension will be granted for a fixed completion date contract.

104.12 Environmental Analysis: the items (G) and (O) of the seventh paragraph of the Standard Specifications is revised to read:

- (G) The archaeological survey of the proposed source prepared by a person who meets the Secretary of the Interior's Professional Qualification Standards (48 FR 44716) and possesses a current permit for archaeological survey issued by the Arizona State Museum (ASM). The survey shall be prepared in a State Historic Preservation Office (SHPO) standardized format. The survey shall identify all historic properties within the area of potential effect (APE), as defined by the National Historic Preservation Act (36 CFR 800.4). This includes the materials source, processing area, and the haul road. Additionally, the survey report shall identify the effects of the proposed source on any historic properties within the APE, and recommend measures to avoid, minimize, or mitigate those effects. The survey report shall be prepared by the contractor in accordance with SHPO and ASM formatting style for the Historic Preservation Specialist's initial review. After the initial review, the Department will consult with the landowner, SHPO, and Tribes for a minimum of 35 days for the final approval of the survey report.
- (O) A description of the impact on federally or state protected or other agency-specific special status wildlife and plants and their habitat, as defined in ADOT's consultant biological procedures on the Department's website. Compliance with the Arizona Native Plant Law shall be coordinated through the Arizona Commission of Agriculture and Horticulture.

104.12 Environmental Analysis: the eighth paragraph of the Standard Specifications is revised to read:

Guidance and forms for preparing the environmental analysis are available on the Department's website through the Environmental Planning Group, or by calling Environmental Planning Group at 602-712-7767.

(104VEPC, 03/20/25)

SECTION 104 SCOPE OF WORK:

104.13 Value Engineering Proposals by the Contractor: the third paragraph of the Standard Specifications is revised to read:

Any cost savings generated to the contract as a result of VEP offered by the contractor and approved by the Department will be shared between the contractor and the Department, with the contractor receiving 60 percent and the Department receiving 40 percent, as specified in Subsection 104.13(D) of the specifications.

104.13(C) Conditions: of the Standard Specifications is modified to add:

- (13) The contractor may submit a previously approved VEP from another project.

104.13(D) Acceptance, Rejection and Payment: the seventh paragraph of the Standard Specifications is revised to read:

- (6) The executed supplemental agreement shall provide that the contractor be paid 60 percent of the net savings amount as reflected by the difference between the cost of the revised work and the cost of the related construction required by the original contract computed at contract bid prices. The net savings will take into account the contractor's cost of developing the VEP and implementing the change, and reducing this amount by the Department's cost for investigating and evaluating the VEP, including any ascertainable collateral costs to the Department. Such collateral costs may include increased costs for maintenance, operation, related work items, additional work items, or elements of related or additional work items.

(104ENVST, 09/19/24)

SECTION 104 SCOPE OF WORK:

104.16 Environmental Standard Work: of the Standard Specifications is hereby modified as follows:

- (F) **Specific Vegetation Protection Program:** is hereby added to the Standard Specifications:

The contractor shall control noxious and invasive plant species throughout the duration of the project in accordance with the requirements of these special provisions.

All disturbed soils that are not landscaped or otherwise permanently stabilized by construction shall be seeded in accordance with the requirements of Item 8050003 of these special provisions.

The contractor shall not disturb unpaved areas without the approval of the Engineer or as stated in the Environmental, Permits, Issues, and Commitments (EPIC) plan sheet 1F of the project plans. If any unpaved areas are disturbed as a result of the contractor's operation and without the approval of the Engineer, the contractor shall seed the areas with species native to the project vicinity. All seeded areas shall be covered by straw mulch with tacking agent. The contractor shall provide the seed mix to the Engineer for approval prior to placing any seeding. No measurement or payment will be made for seeding, the cost being considered as included in the price of contract items.

SECTION 104 SCOPE OF WORK: of the Standard Specifications is modified to add:

104.17 Archaeological and Cultural Site Protection:

(A) General:

The contractor shall avoid archaeological or cultural sites within the project limits that have been pre-determined prior to the commencement of construction. The Department will demarcate these areas with lath with plastic flags. Such pre-determined sites are referred to herein as “cultural avoidance areas”.

The term "Disturbance" shall refer to any act of physical disturbance by the operations of the contractor to the cultural avoidance areas as specified herein.

The site to the west of southbound SR 89A between MP 362.67 and 362.70, as shown in the project plans, will have two boundaries of lath with flagging. The outer boundary serves as the primary perimeter, providing initial deterrence and control of access, while the inner boundary provides an additional layer of security for an archaeological or cultural site.

The contractor shall not enter or disturb the cultural avoidance areas with construction operations.

The contractor will not be held liable if the Engineer determines that the Disturbance to the cultural avoidance areas is not due to the actions of the contractor, subcontractor, or supplier.

(B) Archaeological and Cultural Site Protection Plan:

(1) General:

The contractor shall prepare a comprehensive Archaeological and Cultural Site Protection Plan, referred to herein as the “Plan”, which shall demonstrate how the contractor intends to avoid potential Disturbances. The Plan, at a minimum, shall contain the following information:

- (a) Control measures to be implemented in handling equipment and access of personnel in proximity to the fenced cultural avoidance areas.
- (b) Schedule, at a minimum, two weekly walkthroughs, or as determined by the Engineer, for monitoring and inspecting of the fenced cultural avoidance areas.
- (c) Name and contact information of the Cultural Compliance Inspector(s).
- (d) Proposed oversight of concurrent work activities that take place at more than one location.

The contractor shall submit the Plan at least five working days before the preconstruction conference, provided that the contract is executed by both the contractor and the Department.

The contractor shall meet with the Engineer, and others as designated by the Engineer, during the preconstruction conference to discuss the Plan including:

- (a) Boundaries of the fenced cultural avoidance areas,
- (b) Identify and address the potential impacts of the contractor's operations, and
- (d) Establish control measures to safeguard fenced cultural avoidance areas from Disturbance

The Engineer will return the submitted Plan as accepted or resubmittal required within five working days after preconstruction conference.

No construction activity shall commence within the project limits until the Plan has been approved.

(2) Cultural Compliance Inspector(s):

In the Plan, the contractor shall designate employee(s) as Cultural Compliance Inspector(s) to be responsible for implementation of the Plan throughout the contract duration. Any change to designated personnel shall be notified to the Engineer for approval immediately. The Cultural Compliance Inspector(s) shall observe all construction activities in proximity to the cultural avoidance areas and enforce the requirements of the approved Plan to prevent Disturbance.

The Cultural Compliance Inspector(s) shall perform their duties as specified herein. The Cultural Compliance Inspector(s) may perform work in conjunction with site monitoring duties.

(C) Disturbance Categories and Controls:

(1) Categories:

The Disturbance of the fenced cultural avoidance areas are divided into two categories:

- (a) A 2nd Degree Disturbance is defined as an intrusion beyond the outer boundary. The Engineer will perform an investigation of the incident to make a determination, in consultation with others as is necessary. A 2nd Degree Disturbance is not considered a violation and is not subject to any sanctions specified herein.
- (b) A 1st Degree Disturbance is defined as an intrusion beyond the inner boundary or single boundary that compromises critical parameters, including but not limited to, the security, safety, or integrity of the cultural avoidance area. The Engineer will perform an investigation of the incident to make a determination, in consultation with others as is necessary. An occurrence of a 1st Degree Disturbance will be considered a violation. A 1st Degree Disturbance is subject to the sanctions as specified herein.

(2) Controls:

The Engineer will coordinate with the ADOT Environmental Planning – Historic Preservation Team to complete the demarcation of the cultural avoidance areas prior to construction. The Engineer will inform the contractor once the installation has been completed. The Department will assume maintenance responsibility associated with the lath and flagging of the cultural avoidance areas.

If a Disturbance occurs, the contractor shall immediately stop work at that location. The Cultural Compliance Inspector(s) shall inform the Engineer immediately and document the Disturbance with the following information:

- (1) Time and location of the event
- (2) Description of construction activity that led up to the event
- (3) Details about how the event actually occurred
- (4) Names and positions of contractor and subcontractor employee(s) involved
- (5) Witness statements, notes, photos, sketches, etc.

Any Disturbance will be investigated by the Engineer in consultation with others as is necessary. Upon completion of such investigation, a determination will be made as to whether the disturbance is a 2nd Degree Disturbance or 1st Degree Disturbance.

Both 2nd Degree and 1st Degree Disturbance will require the contractor to prepare and submit to the Engineer, for approval, an action plan that will prevent similar future incursions.

The contractor shall not resume work at that location until directed by the Engineer.

(D) Sanctions:

The Department will assess sanctions, for each violation, in accordance with the following requirements:

1. For the first violation committed by the contractor, the Department will retain monies becoming due the contractor as sanctions as shown in Table 104.17-1:

TABLE 104.17-1 SANCTIONS FOR 1ST VIOLATION	
Contract Size (Dollars)	Percent of the Original Contract Amount (%)
0 to 1,000,000	10
>1,000,000 to ≤5,000,000	5
>5,000,000	3

2. For the second violation committed by the contractor, the Department will retain monies becoming due the contractor as sanctions as shown in Table 104.17-2:

TABLE 104.17-2 SANCTIONS FOR 2ND VIOLATION	
Contract Size (Dollars)	Percent of the Original Contract Amount (%)
0 to 1,000,000	12
>1,000,000 to ≤5,000,000	7
>5,000,000	5

3. A third violation committed by the contractor will result in the termination of the contract in accordance with the applicable requirements of Subsection 108.10 of the specifications.

(105TPDDC, 08/21/25)

SECTION 105 CONTROL OF WORK:

105.18 Opening Sections of Project to Traffic: of the Standard Specifications is modified to add:

Damage to the project resulting from a third-party shall be reported to the Engineer. Damages to permanent project features, determined by the Engineer as eligible for payment in accordance with the requirements of Subsection 104.04 of the specifications, will be paid for in accordance with Subsection 109.04 of the specifications.

(106DMAT, 12/18/25)

SECTION 106 CONTROL OF MATERIALS:

106.15 Blank: of the Standard Specifications is revised to read:

106.15 Domestic Materials and Products:

Steel and iron materials and products used on this project shall comply with the current “Buy America” requirements of 23 CFR 635.410.

All manufacturing processes to produce steel and iron products used on this project shall occur in the United States. Raw materials used in manufacturing the steel and iron products may be foreign or domestic. Steel or iron not meeting these requirements may be used in products on this project provided that the invoiced cost to the contractor for such steel products incorporated into the work does not exceed either 0.1 percent of the total (final) contract cost or \$2,500 whichever is greater.

Any process which involves the application of a coating to iron or steel shall occur in the United States. These processes include epoxy coating, galvanizing, painting, or any other coating which protects or enhances the value of covered material.

The requirements specified herein shall only apply to steel and iron products permanently incorporated into the project. "Buy America" provisions do not apply to temporary steel items, such as sheet piling, temporary bridges, steel scaffolding and falsework, or to materials which remain in place at the contractor's convenience.

The contractor shall furnish the Engineer with Certificates of Compliance, conforming to the requirements of Subsection 106.05, which state that steel or iron products incorporated in the project meet the requirements specified. Certificates of Compliance shall also certify that all manufacturing processes to produce steel or iron products, and any application of a coating to iron or steel, occurred in the United States.

Convict-produced materials may not be used unless the materials were produced prior to July 1, 1991 at a prison facility specifically producing convict-made materials for Federal-aid construction projects.

(106CMATLS, 12/18/25)

SECTION 106 CONTROL OF MATERIALS: of the Standard Specifications is modified to add:

106.17 Construction Materials:

A construction material shall comply with the requirements of Build America, Buy America (BABA) Act specified in Title IX, Subtitle A, Part 1, Sections 70901 and 70911-70917 (Pub. L. No. 117-58 §§ 70901; §§ 70911-70917) of the Infrastructure Investment and Job Act (IIJA).

A "construction material" that is permanently incorporated on the project shall include an article, material, or supply that is or consists primarily of the following:

- (1) Non-ferrous metals;
- (2) Plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables);
- (3) Glass (including optic glass);
- (4) Fiber optic cable (including drop cable);
- (5) Optical fiber;
- (6) Lumber;
- (7) Engineered wood; or
- (8) Drywall.

Items manufactured through a combination of either two or more materials listed above, or at least one of the materials listed above and a material not listed shall be considered as a manufactured product, rather than as a construction material.

Construction materials shall not include cement and cementitious materials; bituminous materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives.

All construction materials shall be produced in the United States. This means, all manufacturing processes to produce the construction materials shall occur in the United States. All manufacturing processes for construction materials shall mean the final manufacturing process and the immediately preceding manufacturing stage for the construction material.

The contractor shall furnish the Engineer with Certificates of Compliance, conforming to the requirements of Subsection 106.05 of the specifications, which shall state that the construction materials incorporated in the project meet the requirements specified herein. Certificates of Compliance shall also certify that all manufacturing processes to produce construction materials occurred in the United States.

If the total cost of construction materials incorporated in the project is no more than 5% of the original contract amount or \$1,000,000, whichever is lesser, the requirements specified herein will not apply for such construction materials.

Convict-produced materials are prohibited in accordance with the requirements of 23 CFR 635.417.

(106MAPR, 12/18/25)

SECTION 106 CONTROL OF MATERIALS: of the Standard Specifications is modified to add:

106.18 Manufactured Products:

Manufactured products used on all projects shall comply with the current “Buy America” requirements of 23 CFR 635.410.

A “manufactured product” is defined as an article, material, or supply that has been processed into a specific form and shape, or combined with other articles, materials, or supplies to create a product with different properties than the individual article, material, or supply. Items manufactured through a combination of two or more materials, or at least one listed construction material and a material not listed, shall be classified as manufactured products.

An item classified as iron or steel product in accordance with the requirements specified in Subsection 106.15 of the specifications or excluded materials such as cement and cementitious materials; bituminous materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives is not considered a manufactured product. However, manufactured product may include components that are iron or steel products or excluded materials.

Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not considered manufactured products.

Precast concrete products, components of precast concrete products that consist wholly or predominantly of iron or steel or a combination of both, will be considered iron and steel product and shall meet the requirements specified in Subsection 106.15 of the specifications.

The intelligent transportation systems and other electronic hardware systems that are installed in the highway right of way or other real property, the cabinets or other enclosures of such systems that consist wholly or predominantly of iron or steel or a combination of both will be considered iron and steel product and shall meet the requirements specified in Subsection 106.15 of the specifications.

The contractor shall furnish the Engineer with Certificates of Compliance, conforming to the requirements of Subsection 106.05 of the specifications, which shall state that the manufactured products incorporated in the project meet the requirements specified herein. Certificates of Compliance shall also certify that all manufactured products used in the project are manufactured in the United States.

Convict-produced materials are prohibited in accordance with the requirements of 23 CFR 635.417.

(107FS, 07/20/23)

SECTION 107 LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC:

107.12 Forest Protection: of the Standard Specifications is revised to read:

(B) General:

If a project or a material pit is located on land which is under the jurisdiction of the U.S. Department of Agriculture (USDA) Forest Service, the contractor shall comply with all applicable State and Federal laws, Federal rules and regulations, and the requirements of the National Forest in which the work is located.

Throughout this subsection, the term Forest Service Officer is used. This person shall be understood to be the District Ranger or any other person authorized or duly appointed to act in all matters affecting the Coconino National Forest lands, Redrock Ranger District.

Forest Service Officers on this project are as follows:

	Name	Phone	
		Day	Night
District Ranger	Alex Schlueter	928-821-5998	928-821-5998
Fire Dispatcher	Flagstaff Dispatch	928-527-3552	928-527-3552

The contractor shall comply with the following minimum requirements for activities within the National Forest:

- (1) The contractor shall do everything reasonably within the contractor's power to prevent wildland fires and shall not dispose of material by burning without a written permit from the Forest Service.
- (2) The contractor shall not cut timber or brush or commence work in any material pit unless a permit to do so has been obtained from the Forest Service.
- (3) The contractor shall fully repair all damage caused by its operations and provide maintenance commensurate with the contractor's use of National Forest roads and trails.
- (4) The contractor shall fully comply with all requirements regarding air quality.

(C) Fire Plan:

The contractor shall submit a Fire Plan for approval by the Engineer and the Forest Service Officer prior to any construction activities. The contractor shall prepare the Fire Plan considering the details outlined herein.

The following outlines the mutual responsibilities of the Forest Service, the Department and the contractor to ensure effective prevention and prompt suppression of all fires within the right-of-way and other work areas.

(1) General:

Fires discovered by the contractor and its employees shall be promptly reported to the Engineer and the Forest Service Officer. The contractor and its employees shall make reasonable attempts to control and extinguish fire without endangering life of contractor's personnel or public on any and all fires within the right-of-way and work areas and within a half-mile zone adjacent thereto. Fires shall be attacked promptly so as to control them while they are small. Fires shall not be abandoned until the Forest Service Officer declares the fire to be out or relieves the contractor and its employees.

The contractor shall place its equipment and employees at the disposal of the Forest Service Officer for the purpose of fighting fires in accordance with the approved Fire Plan.

Equipment shall be operated by employees of the contractor. The Forest Service Officer will assume no responsibility toward such equipment for ordinary wear or damage due to negligence, carelessness, or willful misconduct.

(2) Personnel:

The contractor shall designate at least one representative to train and supervise each construction crew and the individuals designated to perform the duties of fire guard for wildland fire prevention, detection, and suppression. Each such representative shall be named in the Fire Plan.

At contractor's discretion, fire guards may be trained to knowledge standards provided by free Federal Emergency Management Agency (FEMA) NWCG S-190 Introduction to Wildland Fire Behavior (fema.gov) and NWCG S-130 Wildland Firefighter Training (fema.gov) or equivalent training.

The contractor shall provide a list of trained fire guards in the Fire Plan, for all activities involving internal combustion engines and where power-driven equipment has been operated during the day.

The fire guards shall constantly perform their duties during the operating hours and for three additional hours after the construction operations ends for the day, when the proposed Fire Precaution Plan is Plan "B" or "C" as specified in Subsection 107.12(B)(14) of the specifications. The additional work hours of the fire guards will be compensated in accordance with the requirements specified in subsection 104.02 of the specifications. The fire guard may perform contract work in conjunction with fire guard duties during operating hours.

Fire guard on one operating area shall satisfy the requirements on adjacent areas if the travel time with available transportation to reach an adjacent area is not in excess of 10 minutes.

Each fire guard shall be physically able, vigilant, and trained to prevent, detect, and report any wildland fires and to promptly and efficiently take suppression action with available required firefighting equipment and personnel on any wildland fire within the project limits. Each fire guard shall be equipped with a vehicle and a fire tool cache consisting of a cache box, two 4-to-5 gallon backpack pumps filled with water, two size 0 shovels in good working condition, two Pulaskis, and two McLeod tools maintained in serviceable condition.

(3) Reimbursement:

Reimbursement to the contractor for equipment utilized, including operators, will be made by the Forest Service in accordance with rates which have been previously negotiated and agreed upon. These rates will be established prior to mobilization of personnel and equipment to be used for the suppression of fires.

The Forest Service will not reimburse the contractor, for the suppression of fires started by them.

The contractor, in suppressing fires caused by others, including lightning-caused fires, in work areas or within a half-mile zone of work areas will be reimbursed by the Forest Service for such suppression.

In emergencies, the contractor may be called upon to suppress fires on other National Forest lands outside the normal half-mile zone within the project proximity. The contractor will be reimbursed by the Forest Service for such suppression.

If the Forest Service requests that any equipment be made available on standby status, reimbursement to the contractor will be made at a rate established by negotiation.

The Department's publication, Requirements for the Utilization of the Schedule of Equipment Rental Rates for Equipment Used on Force Account Work, will not be applicable when the

contractor's equipment is being utilized under the direction of the Forest Service Officer in the suppression of fires.

(4) Tool Cache:

The contractor shall furnish and maintain at a minimum, one tool cache where tools are clean of rust and foreign material; with sharp cutting edges; in good working condition; and sanded and tightly fitted handles. A tool cache shall contain five long-handled, round point, size No. 0 or larger shovels; five McLeod tools; two double-bit axes; two brushhooks; two backpack sprayers of 3-5 gallon capacity and two Pulaskis with sheaths. These tools are required separate from, and in addition to, the tools required on equipment and tools under the possession of fire guards.

A proper tool mix shall be specified in the project's Fire Plan for approval. Fire tools shall be located in the active operating area of the project or as stated in the approved Fire Plan. The fire tools shall be used only for suppressing wildland fires. All personnel performing the contractor's operations shall be equipped with at least one approved fire tool.

(5) Vehicles and Construction Equipment:

All passenger carrying vehicles, including light pickup trucks shall be equipped with one long-handled, round-pointed shovel in good working condition, and one ABC chemical fire extinguisher not less than 2-1/2 pounds capacity.

Each internal combustion fuel carrying truck, loader, skidder, heavy truck, tractor or any other type of equipment, including but not limited to, earth moving equipment, shall be provided with one long-handled round-pointed shovel in good working condition, and one 5-1/2 pound capacity ABC dry chemical fire extinguisher.

Shovels and fire extinguishers shall be so mounted as to be readily reached from the ground.

All internal combustion engines, including those on tractors, jammers or any stationary or mobile equipment, shall be equipped with a spark arrester qualified and rated under USDA Forest Services Standard 5100-1a, "Spark Arrester Guide" or the latest revision of Society of Automotive Engineers (SAE) recommended practice J350, "Spark Arrester Test Procedure for Medium Size Engines" unless it is:

- (a) Equipped with a turbine-driven exhaust supercharger such as the turbocharger with no exhaust bypass.
- (b) A multi-position engine which meets the performance levels set forth in SAE recommended practice J335B, "multi-positioned small engine exhaust fire ignition suppression" as now or hereafter amended.
- (c) A passenger carrying vehicle or light truck, or medium truck up to 40,000 GVW, used on roads and equipped with a factory designed muffler and an exhaust system in good working condition.

- (d) A heavy duty truck, such as a dump truck, or other vehicles used for hauling, and used only on roads or established accesses and equipped with a factory designed muffler and with a vertical stack exhaust system extending above the cab.

Heavy equipment equipped with an exhaust driven turbocharger in good working order and with no exhaust bypass will qualify. A straight, mechanically driven supercharger does not qualify. Light trucks up to two-ton, pickups, jeeps, and passenger cars shall have effective mufflers and exhaust pipes comparable to the manufacturer's standard equipment installation.

All internal combustion engine driven vehicles and equipment will be inspected by the Forest Service Officer prior to initial operation. All such vehicles and equipment arriving on the work after the initial inspection shall be reported to the Forest Service Officer for inspection prior to operation. All equipment will be inspected periodically after the initial inspection to ensure that spark arresters or turbocharger are in working order. All operators shall submit their equipment to the Forest Service Officer for inspection upon request. Vehicles and equipment not approved for use shall be repaired to meet the requirements specified herein, re-inspected, and approved by the Forest Service Officer prior to use.

All 1975 and later model passenger vehicles and pickups equipped with a catalytic converter shall have a sticker clearly displayed on the dashboard warning the driver of the fire hazard of driving the vehicle over or parking the vehicle where tall grass or other flammable materials can come in contact with the catalytic converter.

The contractor shall make daily inspections of all internal combustion engines, stationary and mobile, to ascertain that spark arresters and mufflers are whole and effective, and that there are no connections that can leak burning particles.

All crawler tractors, rubber-tired tractors, and equipment with power source that are suitable for wildland fire suppression work, shall be equipped with two factory type headlights and one backup light, or brackets mounted for portable self-contained battery operated lights. These portable lights shall be furnished and maintained by the contractor at a location approved by the Engineer.

Exhaust equipment described in this Subsection, including spark arresters and mufflers, shall be properly installed and constantly maintained in serviceable condition.

(6) Smoking:

There shall be no smoking while working. This requirement applies to those activities which require that work be performed in an uncleared area, such as clearing and fencing operations. Smoking shall be restricted to areas designated by the Forest Service Officer and such areas shall be a minimum of 2 feet in diameter which have been cleared to mineral soil. All smoking material shall be completely extinguished before leaving these areas.

There shall be no smoking when driving on National forest lands except when traveling on a graveled, oiled, or otherwise surfaced road. Smoking material shall be extinguished either in ash trays or on a spot cleared to mineral soil.

All smoking closures or other restrictions which may be put into effect shall be carefully observed.

(7) Power Saws and Power Equipment:

Power saws shall be equipped with an approved and serviceable spark arrester/muffler. The spark arrester shall be maintained in effective working order, meeting either Department of Agriculture, Forest Service Standard 5100.1a or appropriate Society of Automotive Engineers (SAE) recommended practice J335 and J350 [36 CFR 261.52(j)], as revised to the date of the opening of the proposals.

Power saws or power equipment shall be filled only in an area which has been cleared to mineral soil. They shall not be started at the place where they have been filled. Mufflers shall be kept in place at all times and the spark arrester screens shall be checked daily. Broken or burned screens shall be promptly replaced. Power saws and power equipment shall be moved at least 10 feet from the place of fueling or refueling before use.

Power saw operators shall check the sawdust at each tree felled before leaving to make sure that no fires have been started. Each operator shall carry with their power saw; a size No. 1, long-handled, round-pointed shovel in good working condition; a fuel can; and a chemical pressurized fire extinguisher of not less than eight ounce capacity by weight.

(8) Burning:

No burning of slash, camp refuse, or other debris or any other burning will be permitted without a daily written permit from the Forest Service and a burn permit issued by the ADEQ, Office of Air Quality.

(9) Fires:

No camp or lunch fires will be permitted except in designated, cleared areas approved by the Forest Service Officer. Any request for lunch fires, warming fires or campfires at an area except those which have been approved shall be made in writing to the Forest Service Officer.

No fires will be allowed when the Fire Precaution Plan "C" or "D" as specified in the Subsection 107.12(B)(14) of the specifications is in effect within the project limits.

(10) Campsites, Parking and Storage Areas:

Campsites, parking, and storage areas on Forest lands shall be approved by the Forest Service Officer prior to use.

All campsites shall comply with all applicable Federal, State, County and City statutes and, ordinances concerning safety, health, and sanitation. Sites shall be cleared of brush, litter, grass or other flammable debris for a radius of 50 feet, maintained, and used in accordance with Forest Service regulations in order to keep the danger of fires to a minimum. The layout of buildings, tanks, trailers, sanitary facilities, etc., shall be approved by the Forest Service Officer.

All chimneys shall be equipped with 1/2-inch mesh screen for spark arrestors. Fire extinguishers approved by the Forest Service Officer shall be placed in readily accessible places in campsites and storage areas.

No fires except those as may be approved in writing by the Forest Service Officer will be permitted. When required by the Forest Service Officer, the contractor shall maintain a cleared fire line around campsites. Upon cessation of use of the campsite, the contractor shall clean up and restore the site to a condition satisfactory to the Forest Service Officer. Such restoration shall give consideration to the minimizing of erosion.

(11) Welding:

Welding shall be done only at sites which have been cleared to mineral soil. An area within 10-foot radius shall be cleared down to mineral soil before the commencement of the welding operations. Immediately following welding and metal cutting operations, and before leaving the site, careful inspections shall be made to detect and extinguish smoldering materials. A round pointed long handle shovel in good working condition, a 5 or 10-gallon container of water with pump, and a 5 pound fire extinguisher shall be available at each welding site.

A fire guard shall remain on duty during the welding process and at least one additional hour after the process is completed. If the additional work hours fall beyond the normal operating hours of the construction work shift, such additional work hours will be compensated in accordance with the requirements specified in Subsection 104.02 of the specifications. Welding is prohibited on projects when the proposed Fire Precaution Plan is "D" as specified in Subsection 107.12(B)(14) of the specifications.

(12) Blasting:

Electric caps shall be required; fuse caps are prohibited. Primer cord shall be understood to be an explosive and not fuse.

(13) Gas and Oil Storage, and Service Areas:

The location of equipment service areas and gas and oil storage shall be approved in writing by the Engineer. All areas shall be cleared of brush, litter, grass or other flammable debris for a radius of 50 feet.

(14) Emergency Fire Precautions:

The emergency fire precautions shall be in accordance with the requirements specified in CT7.22 "Emergency Fire Precautions (5/2008)" and as specified herein.

In case of an emergency, the contractor shall restrict the operations by following the Emergency Fire Precaution Schedule specified herein.

Staged restriction levels will be determined by the Forest Service Officer. The process will be a mix of quantitative and subjective measures considering local conditions and issues when deciding to implement fire restrictions and/or area closures.

In areas where emergency fire precautions are to be followed, the contractor shall provide a fire guard.

EMERGENCY FIRE PRECAUTION SCHEDULE	
FIRE RESTRICTION/CLOSURE "STAGE"	
"STAGED" RESTRICTION LEVELS	FIRE PRECAUTION PLAN
NO RESTRICTIONS	A
STAGE I	B
STAGE II	C
STAGE III PARTIAL/FOREST CLOSURE **	C or D
STAGE IV (TOTAL FOREST CLOSURE)	D
RED FLAG WARNING (Issued by National Weather Service)	D

The Fire Precaution Plans are described as follows:

FIRE PRECAUTION PLAN	DESCRIPTION
A	The contractor shall comply with all the requirements specified in Subsection 107.12 of the specifications.
B	The contractor shall comply with all the requirements specified in Subsection 107.12 of the specifications except designated areas for smoking and warming or cooking fires will require a written permit from the Forest Service.
C	(i) All power tools shall not be used between 9:00 AM and 8:00 PM, except power tools may be used between 9:00 AM and 2:00 PM on areas cleared to mineral soil. (ii) Loading is authorized to continue between 12:00 Noon and 2:00 PM, on areas cleared to mineral soil. (iii) Hauling trucks shall be out of the Construction Area to a surfaced road by 2:00 PM. (iv) All mechanical equipment used for blasting; welding; metal cutting; and clearing and grubbing shall not be used between 12:00 Noon and 8:00 PM. (v) Operations on mineral soil involving road excavation, watering, grading, surfacing, rock crushing, and/or other equipment maintenance may continue with the approval of the Engineer and the Forest Service Officer. No smoking, warming or cooking will be permitted at any time.

FIRE PRECAUTION PLAN	DESCRIPTION
D	The contractor shall shutdown all operations; except operations on mineral soil involving road excavation, watering, grading, gravel surfacing, and rock crushing may continue with special Forest Service permit.

The Forest Service Officer may adjust this Fire Precaution Plan for local weather conditions within the project limits.

The process to notify any change to the Fire Precaution Plan by the Forest Service Officer to the Engineer shall be discussed at the pre-construction conference or partnering meeting. These changes shall be approved by the Engineer and the Forest Service Officer through a written agreement.

The approved change to the Fire Precaution Plan will be communicated to the contractor by the Engineer through phone, email or in-person immediately and prior to the forthcoming work shift.

Projects which are outside the boundaries of the partial forest closure may continue to operate under Industrial Fire Precaution Plan “C” operating criteria as agreed upon between the Forest Service Officer and the Engineer in writing.

Projects within the boundaries of the proclaimed partial forest closure area shall operate under Fire Precaution Plan “D”.

(107UINSLMTS, 02/20/25)

SECTION 107 LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC:

107.14 Insurance: the sixth paragraph of the Standard Specifications is revised to read:

Without limiting any liabilities or any other obligations of the contractor, the contractor shall provide and maintain, if commercially available, the minimum insurance coverage listed below until all obligations under this contract are satisfied:

- (A) General Liability insurance with a minimum combined single limit of \$1,000,000 each occurrence applicable to all premises and operations, and a minimum general aggregate limit of \$2,000,000. The policy shall include coverage for bodily injury, broad form property damage (including completed operations), personal injury (including coverage for contractual and employee acts), blanket contractual, independent contractors, products and completed operations. Further, the policy shall include coverage for the hazards commonly referred to as XCU (explosion, collapse and underground). The products and completed operations coverage shall

extend for one year past acceptance, cancellation or termination of the work. The policy shall contain a severability of interests provision.

- (B) Comprehensive Automobile Liability insurance with a combined single limit for bodily injury and property of not less than \$1,000,000 each occurrence with respect to contractor's owned, hired, or non-owned vehicles, assigned to or used in performance of the work.
- (C) Workers' Compensation insurance to cover obligations imposed by Federal and State statutes having jurisdiction of its employees engaged in the performance of the work, and Employers' Liability insurance with a minimum limit of \$1,000,000. Evidence of qualified self-insured status will suffice for this subsection.

(107UTIL, 04/17/25)

SECTION 107 LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC:

107.15 Contractor's Responsibility for Utility Property and Services: of the Standard Specifications is modified to add:

Copies of existing ADOT permits, subject to availability, may be obtained from the ADOT Area Permit Supervisor as listed below:

NORTHCENTRAL DISTRICT

(928) 779-7529 1959 S. Woodlands Village Blvd.
Flagstaff, AZ 86001
Email address: northcentralpermit@azdot.gov

The following agencies and utility companies have facilities in the area but are not anticipated to be in conflict:

Arizona Public Service (APS)
Christi Taylor
Christi.taylor@aps.com
4360 E Coury Drive
Cottonwood, AZ 86326
(480) 790-1247

APS has OH and UG power facilities within the project limits and shall be protected in place.

American Telephone and Telegraph (AT&T)
Joseph Forkert
joef@forkertengineering.com
22311 Brookhurst St, Suite 203
Huntington Beach, CA 92646
(619) 200-7896

AT&T has UG communication facilities leased within Lumen conduit within the project limits and shall be protected in place.

Lumen
Martin Samaniego
Martin.Samaniego@lumen.com
5025 N Black Canyon Hwy
Phoenix, AZ 85015
(602) 325-0630

Lumen has UG communication facilities within the project limits and shall be protected in place.

The contractor is cautioned to use care when operating near these facilities

107.15(F) Sewage Discharge Damage Assessments: of the Standard Specifications is revised to read:

The Department will assess sanctions in accordance with the Table 107.15-1 below for each 24-hour period, or portion thereof, for each unplanned breakage that occurs in an active sanitary sewer line as a result of the contractor's operation. The rate of these sanctions is based on the type and quantity of effluent discharged as determined by the Engineer.

These sanctions do not relieve the contractor from any of its responsibilities under the contract, including any liquidated damages that may be assessed under Subsection 108.09 of the specifications for late completion of the project.

The sanctions specified in this subsection will be independent of any penalties imposed by others.

The contractor acknowledges that Regulatory agencies may assess or impose civil or criminal penalties on the contractor resulting from sewer discharges.

The Department will not be responsible for any civil or criminal penalties, fines, damages, or other charges imposed on the contractor by any regulatory agency or court for sewage discharges that are a result, directly or indirectly, of the contractor's work performed under this contract.

TABLE 107.15-1 SANCTIONS (EACH 24-HOUR PERIOD, OR PORTION THEREOF)		
Volume of Discharge	Raw Sewage or Industrial Wastewater	Treated Effluent
Less than 10,000 gallons	\$5,000	\$1,000
10,000 to 99,999 gallons	\$10,000	\$2,000
100,000 to 1 million gallons	\$25,000	\$3,000
Greater than 1 million gallons	\$40,000	\$5,000

These sanctions will be assessed for each 24-hour period, or portion thereof, until the contractor has completed all of the following tasks:

- (1) Stopped the discharge;
- (2) Repaired the damaged pipe;
- (3) Restored normal service; and
- (4) Fully cleaned and disinfected the site to the satisfaction of the Engineer.

Upon completion of tasks (1), (2), and (3) above, and prior to completion of Task (4), the sanctions for the current 24-hour period will be at the rate shown in Table 107.15-1. However, for each subsequent 24-hour period, the assessment will be 1/2 of the rate shown in Table 107.15-1.

The sanctions will continue at the reduced rate until the site has been fully cleaned and disinfected to the satisfaction of the Engineer.

As an example, the amounts assessed each 24-hour period for an unplanned discharge of 20,000 gallons of raw sewage, in which the contractor completes tasks (1), (2), and (3) within the second 24-hour period but does not complete full cleanup until the third 24-hour period, will be as follows:

First 24-hour period:	\$10,000
Second 24-hour period:	\$10,000
Third 24-hour period:	\$5,000

For this example, the total sanction will be \$25,000 (\$10,000 + \$10,000 + \$5,000).

(108SUBLT, 10/20/22)

SECTION 108 PROSECUTION AND PROGRESS:

108.01 Subletting of Contract: the thirteenth paragraph of the Standard Specifications is revised to read:

If a subcontractor, of any tier, begins work on the contract prior to the contractor submitting the required documentation and receiving consent from the Engineer, the Department will retain \$1,000 from monies due or becoming due the contractor. The money retained will be for each subcontractor, of any tier, that starts work without the consent of the Engineer. These sanctions will be in addition to all other retention or liquidated damages provided for elsewhere in the contract.

(108PRCN, 08/19/21)

SECTION 108 PROSECUTION AND PROGRESS:

108.03 Preconstruction Conference: the second paragraph of the Standard Specifications is revised to read:

At the preconstruction conference the contractor shall submit a progress schedule showing the order in which the contractor proposes to carry out the work, the dates on which the contractor and its subcontractors will start the work, including procurement of materials, equipment, etc.; the ordering of articles of special manufacture; the furnishing of drawings, plans and other data required under Subsection 105.03 of the specifications for the review and approval of the Engineer; the inspection of structural steel fabrication; and the contemplated dates for the completion.

108.04 Prosecution and Progress: the third paragraph of the Standard Specifications is revised to read:

At a mutually convenient location and time, the contractor shall meet weekly with the Engineer to discuss construction activities; however, a meeting may be waived if mutually agreed to, due to weather conditions, work progress, or for other reasons. At the meetings, the contractor shall provide the Engineer with a detailed, written schedule of construction activities and phases of work for the current week, forthcoming three-week period as well as the construction activities which were performed during the previous week. This schedule shall detail the anticipated start dates and anticipated completion dates of work activities. The weekly schedule should reflect, at a minimum, all activities from the most recently updated project schedule. For work which was completed during the previous week, this schedule shall detail the actual start and completion dates of work activities as well as indicate the status of major ongoing activities. Upon the second occurrence of the contractor failing to provide an accurate schedule as describe herein and after written notification by the Engineer of the first occurrence, the Department will deduct \$500 from the contractor's progress payment per each occurrence thereafter. Minutes of the weekly meetings will be kept by the Engineer and a copy given to the contractor for review and acceptance.

(108TIME, 10/15/20)

SECTION 108 PROSECUTION AND PROGRESS:

108.08 Determination and Extension of Contract Time: the first paragraph of the Standard Specifications is revised to read:

The time allowed for the completion of the work included in the contract will be 115 working days, and will be known as the "Contract Time."

(108RSLD, 06/19/25)

SECTION 108 PROSECUTION AND PROGRESS:

108.09 Failure to Complete the Work on Time: the Schedule of Liquidated Damages table of the Standard Specifications is revised to read:

SCHEDULE OF LIQUIDATED DAMAGES			
Original Contract Amount		Liquidated Damages Per Day	
From More Than:	To and Including:	Calendar Day or Fixed Date:	Working Day:
\$ 0	\$ 500,000	\$ 300	\$ 1,000
\$ 500,000	\$ 1,000,000	\$ 850	\$ 1,700
\$ 1,000,000	\$ 2,000,000	\$ 1,250	\$ 2,650
\$ 2,000,000	\$ 5,000,000	\$ 2,100	\$ 3,800
\$ 5,000,000	\$ 10,000,000	\$ 3,300	\$ 6,850
\$ 10,000,000	\$ 30,000,000	\$ 7,300	\$ 10,550
\$ 30,000,000	\$ 60,000,000	\$ 9,350	\$ 17,750
\$ 60,000,000	\$ 90,000,000	\$ 19,900	\$ 27,850
\$ 90,000,000	-----	\$ 27,450	\$ 38,400

(108SCHLVL1, 08/19/21)

SECTION 108 PROSECUTION AND PROGRESS: of the Standard Specifications is modified to add:

108.12 Schedules:

(A) Definitions:

Activity:

A discrete, identifiable task or event that contributes to completing the project and can be used to schedule and monitor the work.

Activity ID:

A unique alphanumeric identification code permanently assigned to an activity.

Baseline Schedule:

A Critical Path Method (CPM) schedule illustrating the contractor's committed plan to complete the work within the contract time and used to compare the progress of the work.

Constraint:

A limitation placed on a scheduled activity that affects the start or end date of an activity.

Critical Path:

The longest continuous chain of activities which establishes the minimum overall project duration.

Critical Path Method (CPM):

A network-based planning technique that uses activity durations and relationships to calculate a schedule for the project.

Data Date:

The date from which a schedule is calculated, where all activities occurring earlier than the data date are complete and all activities occurring on or after the data date are planned.

Duration:

The estimated time required to complete an activity as recorded on the Project Schedule.

Float Suppression/Sequestering:

The process of utilizing zero free float techniques that allows an activity to start as late as possible by using all available free float of that activity, by the utilization of overly generous activity durations, or by using overly restrictive calendar non-working periods.

Free Float:

The amount of time an activity may be delayed without delaying the early start date of its successors.

Longest Path:

The longest continuous path of activities through a project, which controls project early completion.

Look-Ahead Schedule:

A computer-generated schedule that shows the previous week's work and the work planned for the current and next three weeks.

Milestone:

An activity, with no duration, that is typically used to represent the beginning, end, interim stages and significant events of the project, or contractually required dates.

Monthly Progress Schedule:

A monthly update to the approved baseline schedule.

Narrative:

A written report explaining the Project Schedule in detail.

Predecessor:

An activity that affects the start or finish date of another activity with a logically tied relationship.

Preliminary Schedule:

A CPM schedule that shows the Baseline Schedule for the first 60 calendar days of contract time and, the work breakdown structure and milestones for the entire contract.

Project Schedule:

A logic-based critical path for all work leading up to and including substantial completion or final acceptance that is used for tracking the performance of the work. The term "Project Schedule" will refer to one or more of the following:

- (a) Baseline Schedule,
- (b) Monthly Schedule, or
- (c) Recovery Schedule.

Record Schedule:

A CPM schedule that shows the actual start and finish date of each activity, durations, and all changes.

Recovery Schedule:

A CPM schedule that shows the activity changes to recover the time lost due to incompleteness of the work within the contract time as specified in the Monthly Progress Schedule.

Scheduler:

An individual, who creates, maintains, and revises the Project Schedule using applicable software.

Successor:

An activity whose start or finish date is affected by the logically tied relationship with another activity.

Time Impact Analysis (TIA):

A forward-looking, prospective schedule analysis developed to demonstrate the impact of a change to the current schedule on its longest path.

Total Float (Float):

The cumulative duration of time an activity may be delayed without delaying the contract time or a contractual milestone.

Work Breakdown Structure (WBS):

A framework for organizing and ordering the work activities into hierarchical groups.

(B) General:

The contractor shall prepare, furnish, and use the Project Schedule to plan, monitor, and report the progress of the work. The schedule shall demonstrate a detailed plan to complete the work in accordance with the contract time and be used in communication to coordinate activities among all affected parties.

The contractor shall provide a Scheduler to create and maintain all schedules, updates, Narratives, reports, and TIA related to this project. The Scheduler shall be proficient in CPM schedule development, analysis of resources applicable to the required detail of the Project Schedule and shall be able to perform the required tasks using the specified software.

The Scheduler shall be present at all schedule meetings, in person or via teleconference, and made available for discussion or meetings when requested by the Engineer. The contractor project management personnel, subcontractors, and suppliers shall actively communicate with the Scheduler to develop and maintain accurate updates of progress and schedule revisions throughout the duration of the contract.

The Department's review and comment on a schedule for compliance with this specification does not do the following:

- (1) Imply or constitute approval of particular construction methods or relieve the contractor of its responsibility to provide sufficient materials, equipment, and labor to complete the project in accordance with the contract;
- (2) Attest to the validity of assumptions, activities, relationships, sequences, resource allocations, or other aspects of the schedule;
- (3) Imply the contractor is entitled to a Supplemental Agreement extending the contract time or adjusting the contract price;
- (4) Relieve the contractor from compliance with the requirements of the contract or result in the approval of a deviation, exception to or other variation from the contract. Failure to include an element of work required by the contract in the

schedule does not release or relieve the contractor from responsibility to perform such work.

In preparing, developing and updating the Project Schedule the contractor shall not utilize:

- (1) Float suppression techniques in the schedule, including interim dates imposed by the contractor other than project milestone(s);
- (2) The inclusion of activities or constraints in a path or chain leading to a project milestone which are unrelated to the work as specified in the contract;
- (3) Activity durations or sequences determined by the Department to be unreasonable in whole or in part.

The contractor shall not use preferential sequencing, whereby activities that could be performed concurrently and are established in the Project Schedule as sequential simply to consume float. The contractor shall not indicate artificial activity durations by inflating activities in the schedule to consume float and influence the Critical Path. Sequestering of float is cause for rejection of the contractor's schedule submittal. If float sequestering is identified, the contractor shall revise the schedule appropriately.

Total Float is a commodity available to both the Department and the contractor for sequential use until depleted and not for the exclusive use or financial benefit of either party. A schedule showing an early completion date shall show the time between the scheduled completion date(s) and the required contract completion deadline(s) as Total Float.

The Department will not be liable to the contractor for delays by any party when the contractor completes the work prior to expiration of contract time.

If a delay in performing the work is caused by the Department, the contractor shall immediately notify the Department in writing that a revision to the contract is necessary in accordance with Subsection 104.02 and Subsection 104.03 of the specifications. The contractor shall include a description of the cause of delay, the projected amount of Total Float to be used, and the revised Monthly Progress Schedule showing the use of the Total Float in the Monthly Progress submittal. The contractor shall work cooperatively with the Department, other contractors, and third parties to identify and implement, to the maximum extent possible, no-cost measures to recover all schedule delays, regardless of the cause of the delays.

The contractor shall coordinate with the Department, local governmental entities, utility companies, railroad companies, and any third party entities when developing and maintaining the Project Schedule. The contractor shall coordinate its planning and scheduling efforts as required to address conflicts and comments received from adjacent projects and other entities.

(C) BLANK:

(D) Baseline Schedule:

The contractor shall submit a Baseline Schedule before or at the Preconstruction Conference for the Engineer's review and approval.

The Baseline Schedule shall be in the following format:

- i. Project ID: The schedule project ID shall match the filename format in Subsection 108.12(K) of the specifications. The project name shall be the route number followed by the project description.
- ii. Activity ID: Each activity shall be assigned a unique identification number. Activity ID numbers shall not be changed or reassigned for the duration of the contract. Within each group of the WBS, activity ID's shall be numbered sequentially in increments of 10 in the order of their start date or by finish date of a finish milestone. Milestone activities shall begin with "M". Use 10 characters or less.
- iii. Activity Name: Each activity shall be defined with a unique name that contains the description of work. Each name shall at a minimum consist of a verb or work function (i.e. remove, excavate, form, install), an object (i.e. curb, pipe, footing) and a location (i.e. street, station, bridge number). For example, "Install Barrier Dtl C – S1 120+25 Lt". The activity quantity may be included after location.

The contractor shall create an activity name using the following:

- a) Use 50 characters or less;
- b) Use "S1, S2, ..." for stage naming if applicable;
- c) Do not use all capital letters;
- d) Keep names readable, but use abbreviations as needed. Do not use periods when abbreviating. All abbreviations shall be consistent; and
- e) Location is not required if object name is specific, such as "CMP #201".

The contractor shall provide a list of abbreviations and acronyms. The work related to each activity shall be limited to one stage, one area, one traffic control phase, and one responsible party of the contract.

- iv. Activity Code: Activities shall be assigned with project activity codes that will be used to classify, categorize and organize activities for reporting. Only use project level activity codes and not global or enterprise codes. At a minimum, all activities shall have an activity code for responsible party,

stages, and phases. Additional activity codes shall be added if requested by the Department.

- v. **Milestones:** The contractor shall separately identify each project milestone, conforming to the scheduling requirements set forth in the contract.
- vi. **Constraints:** The contractor shall not use date constraints to logically begin or complete a project activity unless specific calendar dates are shown in the contract. Specific contract dates may only be applied as a constraint to a milestone activity and input as either a “Start on or After” or “Finish on or Before” date. No other constraint types shall be allowed.
- vii. **Duration:** Activity duration shall not exceed 20 calendar days unless approved by the Engineer. Activity durations shall be at least one calendar day. Durations shall represent the anticipated productivity rates that factor in all limitations to the productivity. Long lead activities such as procurement and Level of Effort activities may exceed 20 calendar days.
- viii. **Relationships:** All activities shall have at least one predecessor and one successor except for the project start and project end milestones. Negative lags or negative floats shall not be allowed. Predecessors and successors shall not be linked to the same activity with different relationship types. The start of an activity shall have a Start-to-Start or Finish-to-Start relationship with preceding activities. The completion of an activity shall have a Finish-to-Start or Finish-to-Finish relationship with succeeding activities. Do not use Start-to-Finish relationships. Do not use Finish-to-Start relationships with a lag or overlap.
- ix. If applicable, the schedule shall include but not be limited to all activities below:
 - 1. Mobilization/Demobilization;
 - 2. Right of Way Acquisition;
 - 3. Submittal development;
 - 4. Submittal review and acceptance;
 - 5. Submittal and approval of material samples and mix designs;
 - 6. Submittal and approval of shop drawings;
 - 7. Long lead items, material and equipment procurement;
 - 8. Procurement of permits;
 - 9. Environmental commitments and mitigation activities;

10. Equipment and plant setup;
 11. Fabrication of special items;
 12. Erection and removal of falsework and shoring;
 13. Utility and railroad relocations;
 14. Cure times for concrete;
 15. Cure times for pavement before striping;
 16. Landscape and seeding establishment periods;
 17. Test periods;
 18. Major traffic stage changes;
 19. Substantial completion;
 20. Punchlist completion; and
 21. Final cleanup;
-
- x. The schedule shall be in detail to allow day-to-day monitoring and review of the contractor's operations. It shall show the order and interdependence of activities and the sequence of work.
 - xi. The contractor shall detail the Critical Path activities and logic ties in the schedule to show the work sequencing. The contractor shall use the CPM software to determine the controlling activities in the critical path. The critical activities shall be prominently distinguished on all reports by the use of color or pattern.
 - xii. The contractor shall provide the number of activities to assure adequate project planning and allow for monitoring and evaluation of work progress.
 - xiii. The contractor shall provide activities as necessary to depict third-party work related to the contract. Third-party work activities may include but is not limited to railroads, utilities, real estate, and government agencies.
 - xiv. Seasonal, winter shutdown, traffic, special event, environmental, or other contract restrictions shall be considered and included in the schedule for all work. These restrictions shall be addressed with project calendars and shown as non-work days for each major work type. Global calendars shall not be used. Examples of major work types are earthwork, concrete paving, structures, asphalt, drainage, landscaping, etc. The contractor shall include project calendar for curing time if applicable.

- xv. The duration for each activity shall include the anticipated production rate and the time for anticipated weather stoppages. The contractor shall not reserve random non-work days in a project calendar to account for weather stoppages.
- xvi. The schedule shall have a Data Date of the start date shown in the Notice of Award letter.
- xvii. When processing the schedule in the software, the contractor shall use the following options:
 - 1. When scheduling progressed activities use Retained Logic;
 - 2. Calculate start-to-start lag from Early Start;
 - 3. Define critical activities as Longest Path;
 - 4. Compute Total Float as $\text{Finish Float} = \text{Late Finish} - \text{Early Finish}$; and
 - 5. Calendar for scheduling relationship lag as predecessor activity calendar.
- xviii. The bar chart schedule plot shall be accompanied by a schedule report of the network with a tabulation of the following data for each activity:
 - 1. Activity ID;
 - 2. Activity name;
 - 3. Original duration;
 - 4. Early start date;
 - 5. Early finish date;
 - 6. Late start date;
 - 7. Late finish date;
 - 8. Predecessors;
 - 9. Successors;
 - 10. Free float;
 - 11. Total float;
 - 12. Primary constraint date;

13. Calendar; and

14. Responsibility for activity - e.g., prime contractor, subcontractor, supplier, etc.

(E) BLANK:

(F) BLANK:

(G) Recovery Schedule:

If the Project Schedule indicates a late completion of the work by 28 or more calendar days, the contractor shall prepare a Recovery Schedule which demonstrates how the contractor intends to reschedule the activities to regain compliance with the contract.

Within ten working days of receipt of the Engineer's written direction, the contractor shall submit the Recovery Schedule to the Engineer. The contractor shall not be required to prepare a Recovery Schedule if the contractor requests and demonstrates, in writing, entitlement to extension of a completion deadline due to a Department caused delay, and the Engineer concurs that a Recovery Schedule is not required at that time. If the Engineer disputes the contractor's entitlement to a completion deadline adjustment, the contractor shall, within five working days, submit a Recovery Schedule that does not include a completion deadline adjustment.

Within five working days after a rejection by the Engineer of the Recovery Schedule, the contractor shall resubmit a revised Recovery Schedule incorporating the Department's comments. When the Engineer accepts the contractor's Recovery Schedule, the contractor shall, within five working days after the Engineer's acceptance, incorporate such schedule in the Project Schedule, deliver the same to the Department, and proceed in accordance with the approved Recovery Schedule.

All acceleration costs required to bring the contract work back into compliance with project milestones and the contract time due to a contractor caused delay shall be borne solely by the contractor. Whenever a Recovery Schedule is required, the contractor shall provide the following information:

- i. Transmittal letter;
- ii. Bar chart schedule plot;
- iii. Electronic copy of the file used for the proposed Recovery Schedule; and
- iv. Narrative describing all proposed changes to the Project Schedule in detail, with justification for the changes, including the following:
 1. Changes to activity original durations;
 2. Changes to activity relationships and schedule logic;

3. Cause of schedule slippage and actions taken to recover schedule within the shortest reasonable time (e.g., hiring of additional labor, use of additional construction equipment, and expediting of deliveries);
4. Float consumption;
5. Identification of activities that have been added, deleted, or modified; and
6. Changes to the Project Schedule's Critical Path.

(H) Revisions to Contract:

If the contractor receives a request for extra work from the Department or submits a contract change request in accordance with Subsection 104.02 of the specifications asserting that an event, situation, or change affects a Critical Path of the Project Schedule, the contractor shall prepare and submit a TIA showing the cumulative effect of the change on the completion or fixed milestone date along with a written report describing the time impact in a form satisfactory to the Department complying to Subsection 104.03 of the specifications.

Each TIA shall include a fragmentary network (fragnet) demonstrating the following information:

- v. How the contractor proposes to incorporate a time extension provided for in a Supplemental Agreement;
- vi. The impact to the Project Schedule;
- vii. The sequence of new and/or existing activity revisions that are proposed to be added to the Project Schedule that is in effect when the change or delay is encountered;
- viii. The proposed method for incorporating the delay and its impact to the Project Schedule; and
- ix. The computation of two finish dates. The first finish date shall be computed without consideration of impacts by the proposed revision. The second finish date shall be computed with consideration of impacts by the proposed revision.

If a proposed change in planned work results in altering the Critical Path or extending the schedule completion date, the contractor shall submit a Revised Schedule and a TIA within 15 calendar days of the proposed change.

(I) Record Schedule:

The contractor shall prepare a Record Schedule that includes actual start and actual finish dates for all activities. The Record Schedule, once approved, serves as the final update of

the Project Schedule. The contractor shall include a written certification with the Record Schedule submittal signed by the Project Manager of the contractor in accordance with the following:

“To the best of my knowledge, the enclosed final update of the project Schedule reflects the actual start and completion dates of the activities for the project contained herein.”

The contractor shall submit the Record Schedule to the Engineer for review. Final acceptance will not be issued until the Record Schedule has been approved.

(J) Schedule Meetings and Three Week Look Ahead Schedule:

(a) Baseline Schedule Presentation Meeting:

At a time agreeable to the Engineer, the contractor shall conduct a Baseline Schedule presentation meeting within seven calendar days after submitting the proposed Baseline Schedule. The purpose of this meeting is for the contractor to present and explain the contractor's schedule and construction phasing plan. At a minimum, the following is to be covered at the joint review of the schedule:

- (a) WBS;
- (b) Sequence of work - step through the schedule activity by activity;
- (c) Construction phasing including traffic control phasing and changes;
- (d) Resources to include number of construction personnel and production rates used; and
- (e) Critical Path review.

(b) Weekly Project Meeting and Look-Ahead Schedule:

At the weekly project meetings, the contractor shall provide the Engineer with a detailed, Look-Ahead Schedule. The Look-Ahead Schedule is a computer-generated bar chart schedule plot that shows the previous week's work and the work planned for the current and next three weeks. The contractor shall base the Look-Ahead Schedule on the Project Schedule and provide a greater breakdown of the Project Schedule activities for the purpose of materials inspection and testing. The Look-Ahead Schedule shall clearly note and explain all departures from the Project Schedule. The contractor shall reference the Project Schedule activity ID numbers, WBS, and define subsequent specific daily operations for all work activities scheduled to be performed during the four-week period. The contractor shall identify work being performed by Disadvantaged Business Enterprise (DBE) firms as separate activities. At least one day before the weekly construction activity meetings, the contractor shall submit weekly Look-Ahead Schedules to the Engineer.

(K) Submittals:

Two 11 x 17-inch hard copies and one pdf copy of each schedule in color listed herein shall be provided to the Engineer. The contractor shall furnish to the Engineer for project use an electronic copy of the schedule. The electronic copy shall be Primavera P6 .xml file format prepared in Primavera software.

The filename of schedules shall be submitted in the following format:

SCHEDULE FILENAME FORMAT	
Preliminary Schedule	TTTTT-YYMM-PSVV
Baseline Schedule	TTTTT-YYMM-BSVV
Monthly Progress Schedule #1	TTTTT-YYMM-MPS01VV
Monthly Progress Schedule #2	TTTTT-YYMM-MPS02VV
Recovery Schedule	TTTTT-YYMM-RCYSVV
TIA Schedule	TTTTT-YYMM-TIASVV
Record Schedule	TTTTT-YYMM-RCDSVV
3 Week Lookahead Schedule	TTTTT-YYMM-LASVV
Schedule Narrative	TTTTT-YYMM-NARVV
Note:	
(1) TTTTT: First 5 digits of project TRACS number.	
(2) YYMM: Current 2 digit year and month.	
(3) VV: 2 digit version number (01, 02, etc.).	

All bar chart schedule plots shall be in color and have a size and scale acceptable to the Engineer. Include a title block and a legend on each page. The plot layout shall include a schedule activity table with corresponding bar chart. The activity table shall be grouped by the WBS and include the activity ID, activity name, duration, start date, finish date, and total float. All activities in the bar chart shall be plotted on their start and finish dates. Show relationship lines and data date line. The bar chart shall be time-scaled in two-line format with a date interval set to year/month and type set to calendar.

The contractor shall provide two 8.5 x 11-inch hard copies of the narrative and monthly report with an electronic pdf copy.

The contractor shall provide a schedule log file generated by the software in a .txt file format with all schedule submittals. The log file shall have the same filename as the schedule file. The contractor shall review the log file prior to submittal to verify that the electronic schedule is in compliance with this specification.

(L) Software:

The automated system software shall be Primavera P6.

(109RRBB, 04/18/24)

SECTION 109 MEASUREMENT AND PAYMENT:

109.04(D)(3) Equipment: the first paragraph of the Standard Specifications is revised to read:

Equipment which the Engineer considers necessary for the performance of work will be eligible for payment at the established rates only during the hours that it is operated except as otherwise allowed elsewhere in these specifications. Equipment hours will be recorded to the nearest one-half hour. For the use of equipment owned by the contractor and approved by the Engineer, the contractor will be paid the rental rates, as modified herein, outlined in the Rental Rate Blue Book® (RRBB) for Construction Equipment which is updated by EquipmentWatch™, a division of Fusable, 3200 Rice Mine Road NE, Tuscaloosa, Alabama 35406, phone (888) 307-1713. All rate determinations will be based on the RRBB quarterly rate revisions that are applicable at the time equipment is being used.

(109FAEU, 08/15/24)

SECTION 109 MEASUREMENT AND PAYMENT:

109.04(D)(3)(a) Rental Rates (Without Operators): the equation of the first paragraph of the Standard Specifications is revised to read:

The hourly equipment rental rate (HERR) will be determined by the following formula:

$$\text{HERR} = F \times \left[\frac{1.15 \times R}{176} \right] + \text{HOC}$$

Where: F= Adjustment Factor to R is 0.933

R= Current RRBB Monthly Rate

HOC= Hourly Operating Cost

(109WFADF, 05/15/25)

SECTION 109 MEASUREMENT AND PAYMENT:

109.04(D)(6) Statements: the title and text of the Standard Specifications is revised to read:

109.04(D)(6) Forms:

The contractor shall prepare the Weekly Force Account Detail form for each week of force account activity. The Weekly Force Account Detail form is a standardized, fillable form made available by the Department on the ADOT Construction Group's website.

The form shall detail the labor, equipment, and material charges utilized to accomplish the force account work along with all supporting documentation. The contractor shall furnish copies of original receipts (paid invoice cost) for materials, rental equipment cost, including freight and transportation charges, copies of rental rate blue book equipment sheets and certified payrolls.

If materials used on the force account work are not specifically purchased for such work but are taken from the contractor's stock, then instead of invoices, the forms shall contain or be accompanied by an affidavit of the contractor certifying that such materials were taken from stock, that the quantity claimed was actually used, and that the price and transportation claimed represent the actual cost to the contractor.

Force account work shall be tracked daily; however, the contractor shall compile no more than one full week's worth of daily records into a Weekly Force Account Detail form. Each reporting period runs from Saturday through Friday. The contractor shall submit the form within 30 calendar days of the respective week's force account performance. The completed form shall be submitted to the Engineer for review and approval. The Engineer will review the form and supporting documentation against the ADOT Inspector's Daily Force Account Reports, and will verify that the form is timely, complete, and accurate. Payment will not be made until the contractor has furnished applicable forms, detailing the costs of the force account work, including but not limited to the following information:

- (a) Labor: name, classification, date, daily hours, hourly rate and fringe rate, and certified payrolls for each foreman and laborer.
- (b) Equipment: dates, equipment number, description, operator name, hours used, approved stand-by hours, monthly rental rate, hourly operating cost and rental rate blue book sheets for each unit of equipment.
- (c) Rental Equipment (Third Party): invoice, dates used, vendor name, description of equipment, operator name, hours used, invoice rate, hourly operating cost and rental rate blue book sheets for each rental equipment.
- (d) Materials: invoice, date used, supplier name, description, quantity, unit of measure and unit cost.

- (e) Transportation: freight and express charges on materials, FOB jobsite.

(109FASUB, 05/21/26)

SECTION 109 MEASUREMENT AND PAYMENT:

- 109.04(D)(7) Force Account Work by Subcontractors:** the first paragraph of the Standard Specifications is revised to read:

When force account work is determined by the Engineer to require specialized labor or equipment not normally utilized by the contractor, and such force account work is performed by subcontractors, the contractor will be allowed a supplemental markup of 5 percent of the subcontractor's costs plus the applicable tax and bond as specified in Subsection 109.04(D).

(109RET, 10/20/22)

SECTION 109 MEASUREMENT AND PAYMENT:

- 109.06(B)(3) Partial Payment:** of the Standard Specifications is modified to add:

Notwithstanding any provision of Arizona Revised Statutes Section 28-6924, the parties may not agree otherwise.

- 109.06(B)(4) Final Payment:** of the Standard Specifications is modified to add:

Notwithstanding any provision of Arizona Revised Statutes Section 28-6924, the parties may not agree otherwise.

- 109.06 Partial Payments and Retention:** of the Standard Specifications is modified to add:

(C) Payroll Submittals:

The contractor shall submit payrolls electronically through the internet to the Department's web-based certified payroll tracking system. This requirement shall also apply to every lower-tier subcontractor that is required to provide certified payroll reports.

If, by the 15th of the month, the contractor has not submitted its payrolls for all work performed during the preceding month, the Engineer will provide a written notification of the discrepancies to the contractor. For each payroll document that the contractor fails to submit within 10 days after the written notification, the Department will retain \$2,500.00 from the progress payment for the current month. The contractor shall submit each complete and correct payroll within 90 days of the date of notification. If the payroll is complete and correct within the 90-day time frame, the Department will release the \$2,500.00 on the next monthly estimate. For each payroll that is not acceptable until after the 90-day time frame, the Department will only release \$2,000.00 of the \$2,500.00 retained. The Department will retain \$500.00 as sanctions. Such \$500.00 retentions will not relieve the contractor of its

responsibility to provide each required payroll, complete and correct, as specified above. These sanctions shall be in addition to all other retention or liquidated damages provided for elsewhere in the contract.

(109SUBPAY, 10/20/22)

SECTION 109 MEASUREMENT AND PAYMENT:

109.06(B)(5) Payment Reporting and Sanctions: the eighth paragraph of the Standard Specifications is revised to read:

For each month that the contractor fails to submit timely and complete payment information the Department will retain \$5,000 as sanctions from the monies due to the contractor. After 90 consecutive days of non-reporting, the sanctions will increase to \$10,000 for each subsequent month which the contractor fails to report until the information is provided. These sanctions will be in addition to all other retention or liquidated damages provided for elsewhere in the contract.

109.06(B)(8) Non-compliance: of the Standard Specifications is revised to read:

Failure to make prompt partial payment, or prompt final payment including any retention, within the time frames established above, will result in remedies, as the Department deems appropriate, which may include but are not limited to:

- (a) Sanctions. These sanctions will be in addition to all other retention or liquidated damages provided for elsewhere in the contract:
 - (i) The Department will withhold two times the dollar amount not paid to each subcontractor;
 - (ii) If full payment is made within 30 days of the Department's payment to the contractor, the amount withheld by the Department will be released; and
 - (iii) If full payment is made after 30 days of the Department's payment to the contractor, the Department will release 75 percent of the funds withheld. The Department will retain the remaining 25 percent of the monies withheld as sanctions.
- (b) Additional Remedies. If the contractor fails to make prompt payment for three consecutive months, or any four months over the course of one project, or if the contractor fails to make prompt payment on two or more projects within 24 months, the Department may, in addition, invoke the following remedies:
 - (i) Withhold monthly progress payments until the issue is resolved and full payment has been made to all subcontractors, subject to the sanctions described in paragraph (a) above;

- (ii) Terminate the contract for default in accordance with Subsection 108.10 of the specifications; and/or
- (iii) Disqualify the contractor from future bidding, temporarily or permanently, depending on the number and severity of violations.

In determining whether the sanctions will be assessed, the extent of the sanctions, or additional remedies assessed, the State Construction Engineer will consider whether there have been other violations on this or other contracts, whether the failure to make prompt payment was due to circumstances beyond the contractor's control, and other circumstances. The contractor may, within 15 calendar days of receipt of the decision of the State Construction Engineer, escalate the decision to the State Engineer. If the contractor does not escalate the decision of the State Construction Engineer, in writing to the State Engineer, within 15 calendar days of receipt of the decision, the contractor will be deemed to have accepted the decision and there will be no further remedy for the contractor. If the contractor escalates the decision to the State Engineer, and the contractor does not agree with the State Engineer's decision, the contractor may initiate litigation, arbitration, or mediation pursuant to Subsection 105.21(D) and (E) of the specifications.

(109LSUM, 02/10/20)

SECTION 109 MEASUREMENT AND PAYMENT:

109.10(A) General: the first paragraph of the Standard Specifications is revised to read:

If the Bidding Schedule contains items shown with an alpha suffix and the alpha suffix is listed herein (or in the Special Provisions), the contractor will be paid on a lump sum basis.

The structure(s) to be paid on the basis of a lump sum amount is (are):

- (A) RCB CULVERT, NORTH U-TURN STA 51+41 (10' X 4' X 80')
- (B) RCB CULVERT EXTENSION, NB SR 89A STA 527+08 (10' x 4' x136', EXTEND LT 42')

109.10(D) Payment: the last paragraph of the Standard Specifications is revised to read:

Payments made for structural concrete will be adjusted, in accordance with the provisions of Subsection 1006-7.06(B), for material which fails to meet the required 28-day compressive strength when sampled in accordance with the requirements of Subsection 1006-7.

(109FUEL, 02/10/12)

SECTION 109 MEASUREMENT AND PAYMENT: of the Standard Specifications is modified to add:

109.12 Fuel Cost Adjustment:

(A) General:

The Department will adjust monthly progress payments up or down as appropriate for cost fluctuations in diesel fuel as determined in accordance with these special provisions.

A fuel cost adjustment will be made when fluctuations in the price of diesel fuel, in excess of 15 percent, occur throughout this contract. The Department will not provide such adjustments for fluctuations in the price of diesel fuel of 15 percent or less.

No adjustments will be made for fluctuations in the price of fuels other than diesel.

(B) Measurement:

The base index price of fuel will be determined by the Department from the selling prices of diesel fuel published by OPIS (Oil Price Information Service). The base index price to be used will be the price for Diesel fuel No. 2, Ultra Low Sulfur, PAD 5, City of Phoenix Rack. The reported average value for the Phoenix area will be used.

The base index price for each month will be the arithmetic average of the selling price for diesel fuel, as specified above, shown in the last four reports received prior to the last Wednesday of the month.

This price will be effective as of the last Wednesday of each month, and will be posted on the Department's website, at <http://www.azdot.gov/Highways/cns/bitmat.asp>, on or shortly after the last Wednesday of the month.

This price may also be obtained from Contracts and Specifications Services at (602) 712-7221.

This price will be deemed to be the "initial cost" (IC) for diesel fuel on projects for which bids are opened during the following month.

The current index price for diesel fuel in subsequent months will be the base index price, determined as specified above, for the current month. For example; an adjustment for diesel fuel used in May, if applicable, will be based on the "current price" (CP) for May as posted on the last Wednesday of May. The amount of adjustment per gallon will be the net difference between the "initial cost," adjusted by 15 percent, and the current index price. The monthly adjustment will be determined by the Engineer and included in the payment estimate as a fuel adjustment. For fluctuations in excess of 15 percent, fuel cost adjustments will only be made for current price index increases greater than 1.15 times the "initial cost" or for decreases less than 0.85 times the "initial cost." No calculation will be made for fluctuations in the current index price of 15 percent or less when compared to the "initial cost."

The number of gallons of diesel fuel used per month will be considered to equal 1.5 percent of the dollar amount of work reported by the contractor for each month. Such dollar amount will not include incentives earned by the contractor for pavement smoothness, thickness, or strength for Portland cement concrete pavements; for pavement smoothness or quality lots for asphaltic concrete pavements; for any other revenue derived from quality incentives; or for revenue accrued in the previous month for bituminous material cost fluctuations or diesel fuel price adjustments.

A monthly adjustment, if applicable, will be made on this quantity, as shown below:

$$S = \frac{0.015(Q)}{IC} \times (CP - AC)$$

Where; S = Monetary amount of the adjustment (plus or minus) in dollars
 Q = Dollar amount of work completed for the month
 CP = Current index price in dollars per gallon
 AC = Adjusted "initial cost" (1.15 or 0.85 times IC) in dollars per gallon
 IC = "Initial cost" as determined above, dollars per gallon

If adjustments are made in the contract quantities, the contractor shall accept any fuel adjustment as full compensation for increases or decreases in the price of fuel regardless of the amounts of overrun or underrun.

The value calculated above (plus or minus) will be adjusted to include sales tax and other taxes as applicable.

No additional compensation will be made for any additional charges, costs, expenses, etc., which the contractor may have incurred since the time of bidding and which may be the result of any fluctuation in the base index price of diesel fuel.

No adjustments will be made for work performed after Substantial Completion, as defined in Subsection 105.19, has been achieved.

(C) Payment:

Price adjustments will be shown on the monthly progress estimate but will not be included in the total cost of work for determination of progress or for extension of contract time.

(109BITUMADJ, 06/19/25)

SECTION 109 MEASUREMENT AND PAYMENT: of the Standard Specifications is modified to add:

109.16 Bituminous Price Adjustment:

(A) General:

The term "bituminous material" as used herein shall include asphalt binder, asphalt rubber and emulsified asphalt.

The Department will adjust monthly progress payments as appropriate for market fluctuations in the price of bituminous material.

A price for bituminous material will be determined monthly by the Department based on the selling prices published by the Asphalt Weekly Monitor, a publication of Poten & Partners, Inc. The price will be the arithmetic average of the high and low selling prices for bituminous material shown in the previous four reports for the Arizona/Utah and Southern California regions.

This value will be effective as of the last Wednesday of each month, and will be posted on the ADOT Contracts and Specifications Group website, on or shortly after the last Wednesday of each month.

This price will be deemed the "initial cost" (IC) for bituminous material for projects on which bids are opened during the following month. This price will also be deemed the "current price" (CP) for bituminous material for the following month for projects in construction.

(B) Measurement:

For each item of bituminous material for which there is a specific pay item, and for the bituminous material used in Asphaltic Concrete mixes, an adjustment will be made for each month that a quantity of bituminous material was used on the project.

The IC for the month in which the project was bid will be compared with the CP for the appropriate current month. The CP will be as posted on the Department's website on the last Wednesday of each month, and will be used to adjust costs for bituminous material incorporated into the job during the following month (for example; bituminous material used in May will be adjusted, as specified herein, based on the CP for May as posted on the last Wednesday of April). Any difference in price between these two values will be applied to the quantity of eligible bituminous material incorporated into the work.

Determination of the eligible quantities of bituminous material for adjustment will be based on contractor-furnished invoices, except as described herein.

The tons of emulsified products to which the adjustment will be applicable will be the tons of the emulsified asphalt prior to dilution.

Adjustments in compensation for emulsified asphalts will be made at 60 percent of either the increase or decrease of IC. For emulsified asphalts containing polymer, adjustments in compensation will be made at 66 percent of either the increase or decrease.

The tons of Bituminous Material (Asphalt-Rubber) to which the adjustment is applicable will be 80 percent of the total quantity of the item used. The adjustment is not applicable to the 20 percent of the material which constitutes the crumb-rubber additive.

The tons of Bituminous Material (TR+) to which the adjustment is applicable will be 92 percent of the total quantity of the item used. The adjustment is not applicable to the 8 percent of the material which constitutes the crumb-rubber additive.

The tons of bituminous material in Asphaltic Concrete mixes, subject to price adjustment shall be calculated as follows, based on the approved mix design target values and the quantity of Asphaltic Concrete placed—regardless of the actual percentage of binder incorporated:

A monthly adjustment, if applicable, will be made on this quantity, as shown below:

$$PA = (CP - IC) \times ACP \times F$$

Where: PA = Price Adjustment monetary amount (plus or minus in dollars)
CP = Current index price (dollars per ton)
IC = Initial Cost at time of bid (dollars per ton)
ACP = Asphaltic Concrete Placed (tons)
F = Eligible Asphalt Cement %

The value calculated above (plus or minus) will be adjusted to include sales tax and other taxes as applicable.

- (1) For mixes without reclaimed asphalt pavement (RAP):

F = Approved Mix Design Target Asphalt Cement %

- (2) For mixes with RAP:

F = Approved Mix Design Target Asphalt Cement % – Mix Design RAP Asphalt Cement contribution %

- (3) For mixes using PG TR+ Terminal Blend (8 % Crumb Rubber):

F = 0.92 x (Approved Mix Design Target Asphalt Cement %)

- (4) For mixes using Asphalt-Rubber Blend (20 % Crumb Rubber):

F = 0.80 x (Approved Mix Design Target Asphalt Cement %)

- (5) If the quantity of Asphaltic Concrete is measured by volume, the supplemental agreement establishing the method of measurement will specify the manner in which the tons of bituminous material eligible for the adjustment is determined.

(C) Payment:

Price adjustments will be shown on the monthly progress estimate, but will not be included in the total cost of work for determination of progress or for extension of contract time.

Price adjustments will be calculated using the measurement methods described above. Only the tons of virgin asphalt binder determined by those methods will be subject to a bituminous material price adjustment.

No price adjustment will be made for the RAP binder in the mix.

No price adjustment will be made for the 8% of binder comprising crumb rubber when (TR+) is used.

No price adjustment will be made for the 20% of binder comprising crumb rubber in the asphalt-rubber material blend.

No compensation will be made for changes that may have occurred since the time of bidding and which may be the result of any increase in the IC of bituminous material.

Adjustment in unit prices of items governed by this provision will be made in the next regular monthly progress payment following actual use or application of the bituminous material.

SECTION 201 CLEARING AND GRUBBING

201-4 Method of Measurement: of the Standard Specifications is revised to read:

Clearing and grubbing will be measured by the acre. Measurement will be to the nearest tenth of an acre, measured on a horizontal plane.

201-5 Basis of Payment: of the Standard Specifications is revised to read:

The accepted quantities of clearing and grubbing, measured as provided above, will be paid for at the contract unit price per acre, which price shall be full compensation for the work, complete in place, including furnishing, placing, and compacting the material required to fill the cavities resulting from the removal of tree stumps or other materials.

No separate measurement or payment will be made for removal of any trees regardless of the size, the cost being considered included in the price of the clearing and grubbing pay item.

No payment will be made for clearing and grubbing outside the specified limits, unless such work is authorized by the Engineer.

(201PAY, 07/15/21)

SECTION 201 CLEARING AND GRUBBING:

201-5 Basis of Payment: of the Standard Specifications is modified to add:

When clearing and grubbing is not included as a contract pay item, full compensation for any clearing and grubbing necessary to perform the construction operations designated on the project plans or specified in the Special Provisions shall be considered as included in the price of contract item.

SECTION 202 REMOVAL OF STRUCTURES AND OBSTRUCTIONS: the first paragraph of the Standard Specifications is hereby deleted:

SECTION 202 REMOVAL OF STRUCTURES AND OBSTRUCTIONS:

202-3.03 (B) Bituminous Pavement: of the Standard Specifications is modified to add:

Upon removal, disposal of the existing asphalt concrete shall be the responsibility of the contractor.

ITEM 2020054 REMOVE (SIGN ASSEMBLY):

Description:

The work under this item consists of removing existing sign assemblies as shown on the project plans and as specified herein. A sign assembly shall include the sign panels, sign posts, and foundations.

Construction Requirements:

Unless otherwise permitted by the Engineer, the contractor shall not remove the existing signing until the contractor completely installs the new signing to the satisfaction of the Engineer. If the Engineer allows the contractor to remove the existing signing prior to the complete installation of the new signing, the contractor shall place temporary signing or shall position the existing or new sign panels on temporary supports at no additional cost to the Department. The contractor shall utilize the existing signing items instead of temporary signing at the locations of the existing signing as much as possible.

Except for the removals of the existing signing items indicated on the plans to be removed, the contractor shall not disturb the existing sign panels, signposts, and foundations within the project limits. Any items that are damaged as a result of the construction shall be replaced at no additional cost to the Department. The contractor shall not be responsible for replacing any roadway sign panels, posts, and foundations which are damaged prior to the construction, but shall be responsible for identifying each damaged item to the Engineer prior to the construction operations.

The removal of the sign assembly shall be in accordance with the requirements of Subsection 202-3.06 of the specifications.

Signpost foundations shall be removed a minimum of two feet below grade. Any holes, cavities, trenches or depressions resulting from the removal of signs shall be backfilled with suitable material and compacted to a density of not less than 95 percent of the maximum density as determined in accordance with the requirements of the applicable test methods of the ADOT Materials Testing Manual, and as directed and approved by the Engineer.

The sign panels, posts, and foundations which are removed shall become the property of the contractor and disposed of offsite in accordance with Subsection 107.11 of the specifications.

The contractor shall restore any landscape disturbance by the signpost removals in accordance with the type of landscaping at the location of the signpost removed.

Method of Measurement:

Remove (Sign Assembly) will be measured per each basis for each location regardless of the number of panels on each post.

Basis of Payment:

The accepted quantities of Remove (Sign Assembly), measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place.

(202MICROMIL, 09/19/24)

ITEM 2020075 REMOVE BITUMINOUS PAVEMENT (MICRO-MILLING):

Description:

The work under this item shall consist of micro-milling the existing asphaltic concrete friction course or thin lift pavement treatment to remove surface irregularities, restore grade and/or transverse slope of pavement and provide a texture suitable for a new thin lift surface application, or for use as the final driving surface. The work shall be performed at the locations and depths shown on the plans, as directed by the Engineer, and in accordance with the requirements of these specifications.

Construction Requirements:

The micro-milling equipment shall be specifically designed to remove material to a controlled line and grade. Milling machines shall be equipped with a drum specifically designed and constructed for micro-milling, consisting of cutting teeth spaced no greater than 1/4 inch apart on center. The configuration of the teeth shall be such that the deviation in elevation between any 2 teeth does not exceed 1/16 inch. The equipment used shall be capable of removing the existing asphaltic concrete friction course uniformly throughout the milled area at the required cross-slope and within 1/10 inch of the specified removal depth. The micro-milling

shall be accomplished in a manner which does not destroy the integrity of any underlying pavement surface.

If during milling operation, it is determined that the required average micro-milling depth is greater than the specified micro-milling depth, the contractor shall immediately notify the Engineer and document the situation. Upon approval of the Engineer, the contractor shall proceed with the micro-milling operation. Payment for the removal of additional material will be in accordance with the requirements of Subsection 109.04 of the specifications.

The micro-milled surface shall meet longitudinal profile and cross-slope requirements as shown on plans to the extent achievable within the specified micro-mill depth. The surface finish shall not vary longitudinally or transversely more than 1/8 inch as measured with a 10 foot straightedge. The micro-milled surface shall have a uniform transverse texture pattern of 0.2 inch center to center of each strike area. The target difference between the ridge and valley measurement of the mat surface shall not exceed 1/16 inch. The maximum mean macrotexture depth shall be 0.064 inches, as determined in accordance with Arizona Test Method 742.

At the start of the micro-milling operation, the contractor shall micro-mill a 1,000-foot test section. The micro-milled surface of the test section shall be evaluated by the Engineer for compliance with cross slope, profile smoothness, and maximum mean macrotexture depth requirements. Measurements for compliance shall be taken at a minimum of two random locations, not less than 500 feet apart. If the micro-milled surface is in compliance with the requirements, the contractor can resume the micro-milling operation. If the micro-milled surface is not in compliance, the contractor shall make adjustments to the micro-milling operation and then micro-mill another 1,000-foot test section.

During micro-milling operation, the cross slope, profile smoothness, and maximum mean macrotexture depth shall be determined at a minimum frequency of one test per one-half mile per lane. If, at any time, during the micro-milling operation the Engineer determines that the requirements are not being achieved, the contractor shall stop micro-milling. The micro-milling operation shall not resume until the Engineer is satisfied that the requirements can be met or until successful completion of another test section. The forward speed of the micro-milling machine during milling operation shall not exceed the speed used for the test section. The forward speed of the micro-milling machine shall be checked throughout each production day, or at the discretion of the Engineer.

Micro-milled lanes shall be opened to traffic before the end of each day's work if required by the engineer. Prior to opening, the contractor shall remove dust, residue, and loose milled material from the micro-milled surface in accordance with the requirements of the plans and specifications, and take appropriate measures to ensure that micro-milled surfaces do not trap or hold water. All required pavement markings removed by the micro-milling shall be restored or otherwise addressed with approved traffic control devices before the roadway is opened to traffic.

In the event of circumstances beyond the control of the contractor, such as equipment breakdown, and the contractor is unable to comply with the requirements in the preceding paragraph, the contractor shall provide and maintain such traffic control devices that the

Engineer deems necessary under the circumstances in order to provide safe and efficient passage through the work zone.

Pavement, to be removed by micro-milling, adjacent to manholes, valve boxes, small radius curbs and other fixed objects that produce confined areas shall be removed with milling equipment specifically designed to operate in restricted areas and capable of removing asphaltic concrete friction course of the specified thickness without damage or displacement of the adjacent object. At the discretion of the Engineer, such areas may be excluded from macrotexture testing.

If the milled material is not used on the project, it shall become the property of the contractor.

Method of Measurement:

Remove Bituminous Pavement (Micro-Milling) will be measured by the square yard.

Basis of Payment:

The accepted quantities of Remove Bituminous Pavement (Micro-Milling), measured as provided above, will be paid for at the contract unit price per square yard, which price shall be full compensation for the work, complete in place, as described and specified herein. No measurement or direct payment will be made for loading, hauling and disposing of the milled material.

ITEM 2020115 REMOVE (SIGN PANEL):

Description:

The work under this item consists of removing existing sign panel as shown on the project plans and as specified herein.

Construction Requirements:

Unless otherwise permitted by the Engineer, the contractor shall not remove the existing signing until the contractor completely installs the new signing to the satisfaction of the Engineer. If the Engineer allows the contractor to remove the existing signing prior to the complete installation of the new signing, the contractor shall place temporary signing or shall position the existing or new sign panels on temporary supports at no additional cost to the Department. The contractor shall utilize the existing signing items instead of temporary signing at the locations of the existing signing as much as possible.

Except for the removals of the existing signing items indicated on the plans to be removed, the contractor shall not disturb the existing sign panels, signposts, and foundations within the project limits. Any items that are damaged as a result of the construction shall be replaced at no additional cost to the Department. The contractor shall not be responsible for replacing any roadway sign panels, posts, and foundations which are damaged prior to the construction, but shall be responsible for identifying each damaged item to the Engineer prior to the construction operations.

The removal of the sign assembly shall be in accordance with the requirements of Subsection 202-3.06 of the specifications.

The sign panels which are removed shall become the property of the contractor and disposed of offsite in accordance with Subsection 107.11 of the specifications.

Method of Measurement:

Remove (Sign Panel) will be measured per each basis for each location.

Basis of Payment:

The accepted quantities of Remove (Sign Panel), measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place.

ITEM 2020157 REMOVE (EXISTING LIGHT POLE):

Description:

The work under this item consists of removing existing lighting poles including luminaires, photocells, mast arms, poles, and foundations as shown at the locations on the project plans, and as specified herein.

Construction Requirements:

All existing lighting equipment shall not be removed until new equipment is installed or until authorized by the Engineer.

The contractor shall remove all ADOT identification numbers, such as MU (Maintenance Unit) numbers, and are turned over to the Engineer.

The light poles and foundations shall be removed in their entirety in accordance with Subsection 202-3 of the specifications.

Method of Measurement:

Remove (Existing Light Pole) will be measured on a per each basis.

Basis of Payment:

The accepted quantities for Remove (Existing Light Pole), measured as provided above, will be paid at the contract unit price per each, which price shall be full compensation for the work, complete in place, including removing fuses, luminaires, conductors, and conduit.

No additional measurement or payment will be made for loading, transporting, unloading, stockpiling or inventory of disposed equipment and materials, the cost being considered included in the price of the contract item.

ITEM 2020158 REMOVE (LIGHTING PULL BOX):

Description:

The work under this item consists of removing existing pull boxes from the locations as shown on the project plans and as specified herein.

Construction Requirements:

The removal of existing pull boxes shall only occur when all cables and conductors have been removed from the conduits entering and exiting the pull box to be removed.

The contractor shall remove and dispose of the existing pull boxes called out for removal per Section 202 of the specifications.

The contractor shall remove existing conductors in removed pull boxes and abandoned conduit and to terminate electrical connections to maintain circuit integrity for the light poles remaining are operational as directed by the Engineer.

Method of Measurement:

Remove (Lighting Pull Box) will be measured per each lighting pull box removed.

Basis of Payment:

The accepted quantities for Remove (Lighting Pull Box), measured as provided above, shall be paid at the contract unit price per each, which price shall be full compensation for the work, complete in place, including excavation, backfill, hauling and disposal.

ITEM 2020159 REMOVE (LED LUMINAIRE):

Description:

The work under this item consists of providing all labor, materials and equipment to remove existing LED luminaire.

Construction Requirements:

All materials removed shall become the property of the contractor for his disposal.

Unless otherwise specified, it shall be the responsibility of the contractor to remove and dispose of all existing LED luminaires.

Method Of Measurement:

Remove (LED Luminaire) shall be measured as a unit each for each location.

Basis of Payment:

The accepted quantities of Remove (LED Luminaire), measured as provided above, shall be paid at the contract unit price per each, which shall be full compensation for the work complete in place, including removing and disposing of the existing luminaire as described herein and as shown on the plans.

(203QCEW, 07/15/05)

SECTION 203 EARTHWORK: of the Standard Specifications is modified to add:

203-2.02 Contractor Quality Control:

The contractor shall perform the quality control measures described in Subsection 106.04(C). At the weekly meeting, the contractor shall be prepared to explain and discuss how the following processes will be employed:

- (a) Backfill production, including crusher methods, pit extraction, and washing.
- (b) Stockpile management, including stacking methods, separation techniques, stockpile pad thickness, and segregation prevention.
- (c) Transporting and placing, including transport technique, lift thickness, processing and mixing technique, and compaction methods.
- (d) Excavation and transporting, including method of excavation and transporting methods.
- (e) Embankment, including method of mixing, compaction methods, unsuitable material control, waste site, and lift thickness.

The contractor shall obtain samples and perform the tests specified in the following table:

CONTRACTOR QUALITY CONTROL TESTING REQUIREMENTS			
TYPE OF TEST	TEST METHOD	SAMPLING POINT	MINIMUM TESTING FREQUENCY
Structural Backfill			
Gradation	ARIZ 201	Stockpile	1 per 500 CY per Source
PI	AASHTO T 89 AASHTO T 90		
Proctor Density	ARIZ 225 ARIZ 226 ARIZ 245	Stockpile	1 per Source and as needed
Field Density	ARIZ 227 ARIZ 230 ARIZ 232 ARIZ 235	In-place	1 per 200 CY, minimum 1 per lift

	ARIZ 246		
Subgrade			
Gradation	ARIZ 201	Roadway	1 per Soil Type
PI	AASHTO T 89 AASHTO T 90		
Proctor Density	ARIZ 225 ARIZ 226 ARIZ 245	Roadway	1 per Soil Type
Field Density	ARIZ 227 ARIZ 230 ARIZ 232 ARIZ 235 ARIZ 246	Roadway	1 per 1,000 feet
Natural Ground for Embankment Less than 5 Feet			
Proctor Density	ARIZ 225 ARIZ 226 ARIZ 245	In-place	1 per Soil Type
Field Density	ARIZ 227 ARIZ 230 ARIZ 232 ARIZ 235 ARIZ 246	In-place	1 per 1,000 feet
Embankment			
Proctor Density	ARIZ 225 ARIZ 226 ARIZ 245	In-place	1 per Soil Type
Field Density	ARIZ 227 ARIZ 230 ARIZ 232 ARIZ 235 ARIZ 246	In-place	1 per 1,000 feet per lift
Borrow Within Three Feet of Finished Subgrade Elevation			
Gradation	ARIZ 201	In-place	1 per 2,000 CY
PI	AASHTO T 89 AASHTO T 90		

SECTION 203 EARTHWORK:

203-2 General: of the Standard Specifications is modified to add:

The Subgrade Acceptance Chart, as shown in Attachment A shall be used during construction to determine whether subgrade materials are suitable.

The subgrade material within the project limits that does not meet the project subgrade acceptance chart shall be over-excavated to a depth of 3 feet below finished subgrade elevation and replaced with suitable material.

(203STRBKFL, 10/21/21)

SECTION 203 EARTHWORK:

203-5.03(B)(1) Structure Backfill: the first paragraph of the Standard Specifications is revised to read:

Structure backfill material shall be selected from excavation or from a source selected by the contractor. It shall not contain frozen lumps, chunks of clay, or other objectionable material. Backfill material shall not contain salvaged asphaltic concrete materials. Backfill material to be used for metal piles or similar items of metal shall have a value of resistivity not less than 2,000 ohm-centimeters or the value shown on the plans. Backfill material shall have a pH value between 6.0 and 10.0, inclusive, when placed against metal installations, except aluminum. Backfill material shall have a pH value between 6.0 and 9.0, inclusive, when placed against aluminum installations. Backfill material shall have a pH value between 6.0 and 12.0, inclusive, when placed against installations other than metal. Tests for pH and resistivity shall be in accordance with the requirements of Arizona Test Method 236.

(203ERWK, 07/16/20)

SECTION 203 EARTHWORK:

203-9.02 Materials: the last sentence of the Standard Specifications is revised to read:

Borrow placed within three feet of the finished subgrade elevation shall conform to the following requirement:

$PC + (2.83 \times PI)$ shall not exceed 116,

where:

PC = Percent of material passing the No. 200 sieve (determined in accordance with Arizona Test Method 201), and

PI = Plasticity Index (determined in accordance with AASHTO T 90).

(303RASBAB, 04/18/24)

SECTION 303 AGGREGATE SUBBASES AND AGREGGATE BASES:

303-2 Materials: of the Standard Specifications is revised to read:

Aggregate for the various classes of aggregate subbases and aggregate bases shall consist of stone, gravel or other approved inert material of similar characteristics, and shall be clean and free from vegetable matter and other deleterious substances.

Aggregate subbase and aggregate base material may be comprised of processed salvaged asphaltic concrete, processed salvaged aggregate base material, processed salvaged Portland Cement Concrete materials, virgin aggregate base materials or any combination of these materials meeting the requirements of Table 303-1. These materials may be from a specific project site or approved commercial source. Processed salvaged materials shall conform to the requirements specified in AASHTO M 319.

Aggregate subbases and aggregate bases shall conform to the requirements of Table 303-1:

TABLE 303-1										
Class of Aggregate	Percent Passing Sieve (Inch or No.)									PI, Max.
	3	1-1/2	1	3/4	1/4	4	8	30	200	
1		100	90 - 100				35 - 55		0 - 8.0	3
2		100	90 - 100			38 - 65	25 - 60	10 - 40	3.0 - 12.0	3
3										
4	100				35 - 70				0 - 10.0	5
5	100				30 - 75				0 - 10.0	5
6										

Notes:

- (1) The PI (Plasticity Index) will be determined in accordance with the requirements of AASHTO R 58, T 89, and T 90.
- (2) Classes 1, 2 and 3 are bases; Classes 4, 5 and 6 are subbases.
- (3) The requirements for Class 3 and for Class 6 will be specified in the Special Provisions.
- (4) For Class 1 through Class 4 aggregate, the amount of one fractured face coarse aggregate particles shall be at least 50 percent.
- (5) Resistance to abrasion for Class 1 through Class 4 aggregate will be determined in accordance with the requirements of AASHTO T 96 and shall meet the following requirements:
 - (i) Maximum loss of 12 percent at 100 revolutions
 - (ii) Maximum loss of 40 percent at 500 revolutions
 - (iii) When determining gradation of aggregate subbase or aggregate base material containing processed salvaged asphaltic concrete materials, drying to a constant weight shall be performed at a temperature of 140 ± 5 F, in accordance with the requirements of AASHTO T 265.

Aggregate subbase and aggregate base material not conforming to the requirements of Table 303-1 for gradation and/or PI may be accepted by the Engineer upon the contractor's submittal of testing results demonstrating that the R-Value is at least 79 when determined by AASHTO T 190. At the contractor's option, the material may be reprocessed and re-compacted at no additional cost to the Department.

All metal reinforcement and expansion materials shall be removed from processed salvaged Portland Cement Concrete prior to its use in aggregate subbase and aggregate base material.

The contractor shall submit the testing information for the base and subbase materials which are intended to be used to the Engineer for approval. Any significant change in the materials shall be approved by the Engineer prior to use.

Mixing on grade shall be accomplished using a full depth reclamation machine or pulverizer, manufactured for this purpose. Motor graders, gannon boxes, auger scrapers, or other similar devices will not be allowed for mechanical mixing on grade.

If suitable in-place aggregate subbase or aggregate base materials are available, the contractor shall have the option of re-using such materials as processed salvaged aggregate base. Processed salvaged asphaltic concrete and salvaged Portland Cement Concrete materials may be blended with the processed salvaged aggregate subbase, processed salvaged aggregate base and virgin base aggregates. The blended material shall be homogenous mixture in which there is no segregation, crusts, lumps, or nesting, and shall be sampled and tested to meet the requirements specified herein.

303-3.01 Placement: of the Standard Specifications is modified to add:

When processed salvaged materials are utilized, either from in-place or from a commercial source, the Engineer may require a test section of 1000 feet be placed utilizing the processed materials and construction methods proposed for use by the contractor. Full operations shall not proceed until the test section has been tested and approved by the Engineer. The contractor shall use the same equipment, material processing, and construction methods for the remainder of the construction, unless adjustments made by the contractor are approved in advance by the Engineer.

303-3.02 Compaction: of the Standard Specifications is revised to read:

Each layer of aggregate subbase and aggregate base material shall be compacted to a density of not less than 100 percent of the maximum density determined in accordance with the requirements of the applicable test methods of the ADOT Materials Testing Manual, as directed and approved by the Engineer.

The moisture content shall be determined per AASHTO T 265 when determining density for aggregate subbase and aggregate base material containing processed salvaged asphaltic concrete and/or processed salvaged Portland Cement Concrete.

When AASHTO T 265 is utilized to determine moisture content, acceptance testing results for density will be furnished to the contractor up to 24 hours after performance of in-place density testing to allow sufficient time for moisture determination.

303-5 Basis of Payment: of the Standard Specifications is revised to read:

The accepted quantities of aggregate subbase and aggregate base, measured as provided above, will be paid for at the contract unit price per cubic yard, which price shall be full compensation for the work, complete in place.

(303QCAB, 07/15/05)

SECTION 303 AGGREGATE SUBBASES AND AGGREGATE BASES: of the Standard Specifications is modified to add:

303-3.04 Contractor Quality Control:

The contractor shall perform the quality control measures described in Subsection 106.04(C). At the weekly meeting, the contractor shall be prepared to explain and discuss how the following processes will be employed:

- (a) Aggregate production, including crusher methods, pit extraction, and washing.
- (b) Stockpile management, including stacking methods, separation technique, stockpile pad thickness, and segregation prevention.
- (c) Transporting and placing, including transport technique, lift thickness, processing and mixing technique, and compaction methods.

The contractor shall obtain samples and perform the tests specified in the following table:

CONTRACTOR QUALITY CONTROL TESTING REQUIREMENTS			
TYPE OF TEST	TEST METHOD	SAMPLING POINT	MINIMUM TESTING FREQUENCY
Aggregate Base Class 1, 2, or 3			
Fractured Coarse Aggregate Particles	ARIZ 212	Crusher belt or Stockpile	1 per 1,200 CY
Gradation	ARIZ 201	Crusher belt or Stockpile	1 per 600 CY
PI	AASHTO T 89 AASHTO T 90		
Proctor Density	ARIZ 225 ARIZ 226 ARIZ 245	Crusher belt or Stockpile	1 per Source and as needed
Field Density	ARIZ 227 ARIZ 230 ARIZ 232 ARIZ 235 ARIZ 246	Roadway	1 per 600 CY
Aggregate Subbase Class 4, 5, or 6			
Fractured Coarse Aggregate Particles (Class 4)	ARIZ 212	Crusher Belt or Stockpile	1 per 1,200 CY
Gradation	ARIZ 201	Crusher Belt or Stockpile	1 per 600 CY
PI	AASHTO T89 AASHTO T90		
Proctor Density	ARIZ 225 ARIZ 226 ARIZ 245	Crusher belt or Stockpile	1 per Source and as needed
Field Density	ARIZ 227 ARIZ 230 ARIZ 232 ARIZ 235 ARIZ 246	Roadway	1 per 600 CY

(404BITUM, 08/18/22)

SECTION 404 BITUMINOUS TREATMENTS:

404-1 Description: of the Standard Specifications is revised to read:

The work under this section shall consist of furnishing all materials and constructing or applying bituminous treatments at the locations designated on the plans and in accordance

with the requirements of the specifications and in conformity to the lines shown on the project plans or established by the Engineer.

The bituminous treatments include one or a combination of prime coat, tack coat, and fog coat. The bituminous treatments also include emulsified asphalt chip seal and hot applied chip seal both either with or without fog coat.

When a “hot applied” chip seal is called for on the plans and specifications, it refers to a chip seal using a performance grade asphalt cement or a crumb rubber asphalt as the bituminous material.

404-2.02 Aggregate Materials:

- (A) **General:** the second and third paragraphs of the Standard Specifications are revised to read:

With the exception of precoated cover material, aggregate material shall be sampled for gradation acceptance from the final stockpile prior to being incorporated into the work. The aggregate for the precoated material shall be sampled prior to precoating.

- (B) **Blotter Material:** of the Standard Specifications is revised to read:

Blotter material shall be natural or manufactured sand, volcanic cinders, or other approved material and shall be free of deleterious materials or foreign substances.

The gradation shall meet the following requirements when tested in accordance with the requirements of Arizona Test Method 201:

Sieve Size	Percent Passing
3/8 inch	100
No. 4	80 - 100
No. 16	45 - 80
No. 200	0 - 5.0

- (C) **Cover Material:** of the Standard Specifications is revised to read:

Aggregate for cover material shall be clean gravel or crushed rock, shall be free of clay, and shall not contain calcium carbonate, caliche, synthetic materials, organic matter, or foreign substances. Cover material shall not be obtained from sweepings of previously applied cover material.

The gradation shall meet the following requirements when tested in accordance with the requirements of Arizona Test Method 201.

Sieve Size	Percent Passing	
	Class 1	Class 2
3/4 inch	100	
1/2 inch	97 – 100	100
3/8 inch	70 – 100	97 – 100
1/4 inch	0 – 10	70 – 100
No. 8	0 – 5	0 – 5
No. 200	0 - 2.0	0 - 2.0

Cover material shall meet the following requirements:

Aggregate Characteristics	Test Method	Requirement
Abrasion	AASHTO T 96	100 Rev., Max 9% 500 Rev., Max 40%
Carbonates	Arizona Test Method 238	Maximum 20%
Fractured Coarse Aggregate Particles	Arizona Test Method 212	Minimum 75% one fractured face, determined on plus No. 8 material
Flakiness Index	Arizona Test Method 233	Maximum 20%
Bulk Oven Dry Specific Gravity	Arizona Test Method 210	2.350 – 2.850
Water Absorption	Arizona Test Method 210	0.0 – 2.5%

(D) Precoated Cover Material: of the Standard Specifications is revised to read:

For hot applied chip seals, the cover material shall be precoated with any grade of PG asphalt cement which meets the requirements of Section 1005 of the specifications. The precoating shall be accomplished by mixing at a central plant until the aggregate is evenly coated. The cover material shall have a minimum temperature of 250 degrees F at the time of precoating with asphalt cement. The cover material shall be precoated with approximately 0.40 to 0.60 percent asphalt cement, by weight of the aggregate. The final percentage of asphalt cement used for precoating will be as directed by the Engineer. Precoated cover material shall be dust free upon completion of coating and shall remain dust free prior to being incorporated into the work.

The aggregate for precoated cover material shall meet the requirements in Subsection 404-2.02(C) of the specifications prior to precoating with bituminous material.

No precoated cover material shall be stockpiled following precoating with asphalt cement for more than five calendar days prior to placement, unless otherwise approved by the Engineer.

404-2.03 Bituminous Treatment Material Types and Application Rates: of the Standard Specifications is modified to add:

The type of bituminous material for tack coat and approximate application rate shall be as specified in Subsection 404-4.02 of the specifications.

The bituminous material application rates provided in this Subsection are approximate, and are to be used for bidding purposes, and shall be modified as required herein. Final application rates for all materials shall be those required to ensure the most favorable outcome, as approved by the Engineer.

404-3 Construction Requirements:

404-3.01 Seasonal and Weather Limitations: of the Standard Specifications is revised to read:

(A) General:

At any time, the Engineer may require that the work cease or that the work day be reduced in the event that weather conditions, either existing or expected, are anticipated to have an adverse effect upon the bituminous treatment.

Placement shall cease for the remainder of the day if sustained wind velocities in excess of 15 MPH occur at the project site.

(B) Prime Coat:

Bituminous material used for prime coats shall be applied to an existing aggregate surface only when the ambient temperature in the shade is at least 70 degrees F and when the existing aggregate surface is slightly damp.

(C) Fog Coat:

Bituminous material used for fog coats shall be applied to an existing pavement surface only when the surface is dry, the pavement surface temperature is at least 60 degrees F but does not exceed 175 degrees F, and the ambient temperature at the beginning of the application is at least 50 degrees F and rising but does not exceed 110 degrees F. The application of bituminous material shall be stopped when the ambient temperature is 55 degrees F or less and falling.

(D) Chip Seal:

The contractor's bid submittal and initial construction schedule shall adhere to the beginning and ending dates shown in Subsection 404-4.04(A) of the specifications. Bituminous material used for chip seal coats shall only be placed when the existing pavement surface is dry, the surface temperature is at least 85 degrees F, and the ambient temperature at the beginning of the application of bituminous material is at least 65 degrees F and rising. The application of bituminous material shall be stopped when the ambient temperature is 70 degrees F or less and falling.

No placement of bituminous material for chip seals shall occur if ambient temperatures are forecasted to be at or below 40 degrees F at any time during the day or night after placement.

For hot applied chip seals, no placement shall occur if ambient temperatures exceed, or are forecasted to exceed, 110 degrees F the day before, the day of, or the two days after placement.

404-3.02 Equipment:

- (A) **Distributor Truck:** the first sentence of the first paragraph of the Standard Specifications is revised to read:

Distributor trucks shall be so designed, equipped, maintained and operated that bituminous material at the specified temperature may be applied uniformly on variable widths of surface at readily determined and controlled rates from 0.03 to 1.00 gallons per square yard, with uniform pressure, and with an allowable transverse variation from any specified rate not to exceed 10 percent or 0.02 gallons per square yard, whichever is less.

- (A) **Distributor Truck:** the first sentence of the fourth paragraph of the Standard Specifications is revised to read:

Distributor truck spray bars shall be equipped with the appropriate size nozzles adjusted to the proper angle with the associated adjustment wrench to achieve maximum overlap of spray and an even application.

- (B) **Power Brooms:** of the Standard Specifications is revised to read:

Power brooms shall be of the rotary or pickup type, capable of completely removing excess blotter material, and cleaning without gouging or tearing the surface.

- (D) **Aggregate Spreaders:** of the Standard Specifications is revised to read:

The application of blotter material shall be accomplished by means of a sand slinger or other equipment approved by the Engineer.

The application of cover material shall be accomplished by means of a calibrated spreader. The spreader shall be a self-propelled, computerized rate-controlled unit capable of an application width of 14 feet or greater. The spreader shall be in good mechanical condition, capable of applying the correct aggregate application rate uniformly across the spread width.

Chip spreader boxes shall be calibrated to ensure consistent discharge across all of the chutes except where the discharge is intentionally adjusted to compensate for site conditions and construction operations.

404-3.03 Traffic Control: of the Standard Specifications is hereby deleted.

404-3.04 Preparation of the Surface: of the Standard Specifications is revised to read:

The surface to be treated shall be thoroughly cleaned prior to applying bituminous material. Man holes, utility covers, and catch basins shall be protected prior to and during application of bituminous material. Self-propelled rotary power brooms, pickup brooms, and hand brooms shall be used immediately in advance of applying the bituminous material.

When a bituminous treatment is to be applied to an existing aggregate surface, the surface shall be uniformly smooth, firm and reasonably true to grades and cross sections as shown on the project plans, and shall be so maintained throughout the placing of the bituminous treatment. In no event shall a bituminous treatment be placed on a soft, uneven base. All holes, depressions or irregularities shall be repaired. All loose and unsuitable material shall be removed and replaced by suitable material, which shall be compacted to produce a dense uniform surface conforming to the adjacent area.

When required, the existing aggregate surface on which the bituminous treatment is to be placed shall be lightly bladed, watered and compacted immediately prior to the application of bituminous material. In extremely dry areas, additional light applications of water may be required prior to the application of the bituminous material to facilitate penetration of the bituminous material.

404-3.05 Application of Bituminous Material: the first, second and third paragraphs of the Standard Specifications are revised to read:

The types, grades, and approximate rates of application of bituminous material shall be as specified in Subsections 404-2.03 of the specifications. The application rates for chip seal coats shall be determined by the contractor in accordance with the requirements herein, subject to approval by the Engineer.

The rates to be applied may vary substantially because of different surface conditions within the project limits. The actual bituminous material application rate shall not vary more than 10 percent from the application rate specified or approved by the Engineer.

The bituminous material shall be uniformly applied to the prepared surface at the rate specified or approved by the Engineer and in one application.

404-3.05 Application of Bituminous Material: the seventh, eighth and ninth paragraphs of the Standard Specifications are revised to read:

In the event that any spots are missed in the application, or any areas develop that do not have a uniform spread or penetration, such areas shall be remedied without delay.

Care shall be taken to prevent the spraying or splattering of bituminous material on adjacent pavements, structures, curb, guardrail, vegetation, or any other object outside of the area designated for spraying.

Removal and disposal of unused bituminous material shall be the contractor's responsibility and at no cost to the Department.

404-3.06 Application of Blotter Material: of the Standard Specifications is revised to read:

The approximate application rate of blotter material, when required as a part of a bituminous treatment, shall be as specified in Subsection 404-2.03 of the specifications; however, the Engineer will specify the exact rate to be applied based on the characteristics of the bituminous treated surface. The specified application rates are based on the wet weight of material.

Blotter material, at the time of spreading, shall be wet but free from running water. Blotter material shall be spread uniformly to the treated surface in one or more applications for a total application rate as specified. Blotter material shall be applied at a time acceptable to the Engineer and before opening to traffic.

Any oversized aggregate or foreign material picked up during stockpiling or loading operations shall be eliminated before entering the spreader. Supplemental spreading or smoothing shall be done by hand methods where necessary.

Prior to final acceptance and when ordered by the Engineer, the contractor shall remove and dispose of any excess blotter material. Removal and disposal of excess blotter material shall be the contractor's responsibility and at no cost to the Department.

404-3.07 Joints: of the Standard Specifications is revised to read:

(A) General:

Transverse joints with the preceding work, at intersections, and at all existing pavements and structures shall be made by a method approved by the Engineer prior to the start of the work.

Longitudinal joints shall be overlapped between 2 to 6 inches.

Regardless of the width of the roadway to be sealed, the number of longitudinal joints shall be kept to a minimum. Longitudinal joints shall be located to the greatest degree obtainable to coincide with the painted lines between traffic lanes.

(B) Chip Seal:

Unless otherwise directed by the Engineer, transverse joints with the preceding work shall be made by placing building paper over the end of the previous application, and the joining application shall start on the building paper. Once the application process has progressed beyond the paper, the paper shall be disposed of as directed by the Engineer. Transverse joints at other locations shall be made by a method approved by the Engineer prior to the start of the work.

Joints shall be cleaned as deemed necessary by the Engineer prior to the application of bituminous material in the adjacent strip.

404-3 Construction Requirements: of the Standard Specifications is modified to add:

404-3.08 Opening to Traffic:

In the construction or application of bituminous treatments, no traffic or equipment will be permitted on the treated roadway surface until it has been established to the satisfaction of the Engineer that the treated roadway surface will not be damaged or marred under the action of traffic. No traffic of any description shall be allowed on any bituminous treatment until approved by the Engineer.

404-4 Prime Coat: the title and text of the Standard Specifications is revised to read:

404-4 Bituminous Surface Treatment:

404-4.01 Prime Coat:

The type of bituminous material and the approximate application rate shall be as specified in Subsection 404-2.03 of the specifications. The Engineer may adjust the actual application rate based on specific trials and visual observations performed on test areas for different base conditions.

When it is deemed necessary, areas having excess bituminous material shall be blotted with material as directed by the Engineer.

When directed by the Engineer, the surface of the completed prime coat shall be rolled with a pneumatic-tired roller.

The integrity of the prime coat shall be maintained at all times until the next course is placed or until final acceptance. In the event traffic has caused holes or breaks in the surface, such holes or breaks shall be repaired by the contractor.

404-4.02 Tack Coat:

Tack coat shall be applied prior to placing a bituminous mixture on a primed surface, an existing bituminous surface, or an existing Portland cement concrete pavement surface. Tack coat shall also be applied between each layer of bituminous mixtures. A light coat of bituminous material shall also be applied to edges or vertical surfaces against which a bituminous mixture is to be placed.

The contractor shall choose the bituminous material to be used for tack coat. The Engineer must approve the contractor's choice of bituminous material prior to its use.

The rate of application for the specific usage will be specified by the Engineer. The following table shows approximate tack coat application rates:

Type of Bituminous Material	Approximate Tack Coat Application Rates: Gallons / Square Yard		Payment Factor
	Prior to Placing ACFC or AR-ACFC	All Other Tack Coats	
Emulsified Asphalt (Special Type) – See Note (1) Below.	Not Allowed	0.12	0.7
Emulsified Asphalt (Other than Special Type)	0.08	0.08	1.0
Asphalt Cement	0.06 to 0.08	0.06 to 0.08	1.0
Note: (1) Emulsified Asphalt (Special Type) shall consist of Type SS-1 or CSS-1 emulsified asphalt diluted with water to provide an asphalt content of not less than 26 percent.			

The Engineer may adjust the application rate.

If emulsified asphalt of any type is used, it shall have broken before the bituminous mixture is placed.

Tack coat shall be applied only as far in advance of the placement of the bituminous mixture as is necessary to obtain the proper condition of tackiness. All traffic on a tack coat surface shall be minimized to the greatest extent possible. In no event shall more tack coat be applied in one day than will be covered by the bituminous mixture during that same day.

404-4.03 Fog Coat:

The type of bituminous material and the approximate application rate shall be as specified in Subsection 404-2.03 of the specifications. The material shall be diluted with one part water to one part bituminous material. The specified application rate is based on the diluted material. The Engineer may adjust the actual application rate based on specific trials and visual observations performed on test areas for different pavement conditions.

When specified in Subsection 404-2.03 of the specifications, blotter material shall be applied following the application of bituminous material.

404-4.04 Chip Seal Coat:

(A) General:

The contractor shall prepare their bid submittal and initial construction schedule, submitted at the Preconstruction Conference as described in Subsection 108.03 of the specifications, based on the following beginning and ending dates for placement of the chip seal.

Average Elevation of Project, Feet	Beginning and Ending Dates
0 – 3499	March 15 – May 31
0 – 3499	September 1 – October 31
3500 – 4999	May 1 – September 30
5000 and over	June 1 – August 31

Any proposed placement deviating from the beginning and ending dates shall be detailed in the written schedule of construction submitted at the weekly meeting described in Subsection 108.04 of the specifications. No contract time extension will be granted for placement outside of the beginning and ending dates. Any placement deviating from the beginning and ending dates shall be at the sole risk of the contractor.

The type of bituminous material and the approximate application rate shall be as specified in Subsection 404-2.03 of the specifications. The type of cover material shall be as specified in Subsection 404-2.03 of the specifications.

The contractor shall determine the application rates and corresponding quantities of bituminous material and cover material for chip seal coat in accordance with Arizona Test Method 819. Application rates are subject to approval by the Engineer. Areas and locations anticipated to require adjustment to the rate(s) shall also be identified.

The application rates and performance of emulsified asphalt chip seals shall be evaluated using the Sweep Test in accordance with ASTM D7000.

The performance of hot applied chip seals shall be verified using the Vialit Retention Test in accordance with EN 1272-3, modified as necessary to account for the specific characteristics of the proposed chip seal.

The actual application rate shall be such that the aggregate is embedded approximately 70 percent (80 percent above 4,000 feet elevation) and excessive tracking of bituminous material does not occur under construction equipment or when opened to traffic.

The actual rate of cover material to be applied shall be such that no more than 5 percent of the chips applied are removed during sweeping and approximately 20 percent void space exists between the aggregate particles once realigned after opening to traffic.

The proposed application rate(s), locations requiring adjustment, and the associated basis for each adjustment, shall be submitted to the Engineer for approval no later than five days following completion of the Pre-Activity Walkthrough as described in Subsection 404-4.04(B) of the specifications and at least five days prior to placement of the test strip.

The basis for any anticipated adjustments shall include use of one or more of the following:

- (a) Sand Patch tests performed in accordance with *STP762 Pavement Surface Characteristics and Materials*; Haydon, C.E. (ASTM, 1982),

- (b) Appendix B of Chip Seal Guide for Application and Construction; Pavement Preservation Committee of the Arizona Chapter of The Associated General Contractors (AGC-Arizona Chapter, 2013),
- (c) Arizona Test Method 742 for mean macrotexture.

The approved application rate(s) and adjustments shall be clearly marked at the corresponding locations and remain visible to equipment operators prior to placement.

At least 10 days prior to chip seal placement, the contractor shall submit a minimum 75-pound sample of uncoated cover material to the Engineer for testing. In addition to the submitted cover material, the contractor shall also submit 3 full gallons of emulsion (5 to 8 gallons for hot applied) in 1-gallon cans in accordance with the requirements of Arizona Test Method 103. The contractor shall also submit 40 pounds of granulated rubber if included in the bituminous material.

(B) Pre-Activity Walkthrough:

Prior to placement, the contractor shall conduct a Pre-Activity Walkthrough with all parties expected to work on the chip seal.

Locations where adjustments in application rate may be appropriate shall be documented.

A location for a test strip, approximately 1,000 feet in length shall be identified. If additional test strip locations are desired due to varying surface conditions, these shall also be identified.

Other factors or site conditions such as turn or deceleration lanes, changes in surface characteristics, crack fill, and recent patchwork which may affect placement of the chip seal coat shall also be identified. A description of any affecting conditions and the corresponding locations and action to be taken to minimize their impact shall be documented.

In addition to the requirements herein, the items contained on the checklists provided in AGC-Arizona Chapter's Chip Seal Guide for Application and Construction shall be considered.

(C) Chip Seal Test Strip:

Prior to the start of placement, all equipment used in the placement of the chip seal coat shall be verified to be in satisfactory operating condition and in accordance with the requirements herein.

Cover material shall be verified to have appropriate moisture and be in a condition consistent with that in which it existed at the time initial acceptance samples were obtained. Bituminous material certifications shall be verified to indicate that the required type of material is on hand. The bituminous material shall be at the proper temperature prior to application.

The chip seal test strip shall be a minimum of 500 linear feet. The existing pavement surface to receive the test strip shall be verified to have been adequately swept and cleaned and meeting the requirements herein. Anticipated application rates shall have been marked and clearly visible to equipment operators.

During placement of the test strip, all equipment shall be observed to confirm proper operation. The application rate of both the bituminous material and cover material shall be measured and verified using a catch-and-weigh "tarp" method. The application rate of the bituminous material shall also be measured and verified by means of a volume per area calculation using the distributor trucks calibrated thermometer and volume measuring gauge or device.

Rolling shall immediately follow placement of the cover material and be verified to be in conformance with the requirements herein.

For emulsion chip seals, the contractor shall broom the surface to remove excess cover material only after the emulsion has fully broken and cured sufficiently for maximum chip retention.

Prior to any subsequent placement, the test strip shall be observed to have adequate embedment of the cover material without excessive void space between the chips, stacking of chips, or accumulation of chips on the shoulders. If the condition of the test strip is not acceptable, adjustments shall be made as appropriate, and an additional test strip shall be performed.

(D) Application of Bituminous Material for Chip Seal:

The following bituminous material application requirements for chip seal are in addition to the requirements specified in Subsection 404-3.05 of the specifications.

Bituminous material shall not be applied a distance ahead of the chip spreader that results in excessive lag of the rollers allowing hot applied bituminous material to cool or emulsified bituminous material to break prior to achieving adequate embedment of the cover material.

When inclement weather is expected, only the amount of hot applied bituminous material which can receive adequately embedded cover material, or only the amount of emulsified asphalt that can receive adequately embedded cover material and has sufficiently broken, shall be placed prior to the start of inclement weather.

(E) Application of Cover Material:

Cover material shall be immediately and uniformly spread over the freshly applied bituminous material such that aggregate particles are securely adhered and will not roll, tumble, or be picked up during the rolling process. Any oversize aggregate or foreign material picked up during stockpiling or loading operations shall be eliminated before entering the aggregate spreader hopper. Supplemental spreading and smoothing shall be done by hand methods where necessary.

When emulsified asphalt is used, the cover material shall be at a saturated surface-dry condition at the time of spreading.

For hot applied chip seals, and when project conditions require, precoated cover material shall be at a sufficient temperature to facilitate adequate embedment.

(F) Rolling Cover Material:

Following the spreading of cover material, the surface shall be promptly rolled with self-propelled pneumatic-tired rollers. A minimum of three rollers shall be provided; however, a sufficient number of rollers shall be provided to cover the entire width of the material spread in one pass of the compactors and rolling shall continue until a minimum of three passes has been completed.

For chip seals with a hot applied bituminous material the first roller pass shall occur as soon as possible but no longer than 2 minutes after applying the aggregate. The third pass shall be completed quickly enough to embed the aggregate before the binder cools, and no longer than 15 minutes after the binder is applied.

(G) Removal of Loose Cover Material:

The cover material shall be removed by means of a power broom which shall be in good condition and of a design suitable for the work. The action of the broom shall be such that particles which are stuck to the bituminous material will not be dislodged.

For chip seals with an emulsified bituminous material, initial removal of all loose cover material shall not commence prior to two hours after placement or at such time that the Engineer has determined that the emulsion has sufficiently cured.

For chip seals with a hot applied bituminous material, the removal of loose cover material shall commence approximately 30 minutes after the final rolling is completed.

Initial removal of loose cover material shall occur prior to opening to traffic. All loose cover material shall be removed from the paved surface by brooming within 24 hours after application.

After the traffic free period as specified in Subsection 404-4.04(H) of the specifications, but prior to final removal of loose cover material, all traffic permitted by the Engineer shall not exceed 25 miles per hour.

If the Engineer determines that conditions are not conducive to obtaining the best results, brooming shall be discontinued until the Engineer has considered all conditions and has determined the best time for the removal of the cover material.

(H) Minimum Traffic-Free Period:

The minimum traffic-free period for a newly applied emulsion chip seal coat shall be three hours. The contractor's hauling equipment may use the new seal coat surface during the traffic free period at a speed not to exceed 15 miles per hour but shall not make sharp turns of brake abruptly.

(I) Fog Coat on New Chip Seals:

When specified in Subsection 404-2.03 of the specifications, a fog coat shall be placed on the new chip seal following the curing period. The type of bituminous material and the

approximate application rate shall be as specified in Subsection 404-2.03 of the specifications. The material shall be diluted with one part water to one part bituminous material. The specified application rate is based on the diluted material. The Engineer may adjust the actual application rate based on specific trials and visual observations performed on test areas for different pavement conditions.

When specified in Subsection 404-2.03 of the specifications, blotter material shall be applied following the application of bituminous material.

(J) Contractor Quality Control:

The contractor shall be responsible for the chip seal design, performing quality control testing on materials, and designating an individual charged with constant observation and monitoring.

Need for an adjustment to application rates or a correction to process or equipment shall be communicated immediately to the necessary personnel.

The initial condition of equipment, materials, and the project and pavement surface conditions shall be documented. The performance and results of the test strip shall be documented. Observations of monitoring activities and quantification of application rates during the test strip and production shall be documented no less frequently than every other placement run.

The cause for any adjustments, including quantifying tests performed, the adjustments made, and the result of such adjustments with regard to acceptability and performance of the chip seal coat shall be documented.

404-5 Tack Coat: of the Standard Specifications is hereby deleted.

404-6 Fog Coat: of the Standard Specifications is hereby deleted.

404-7 Chip Seal Coat: of the Standard Specifications is hereby deleted.

404-8 Method of Measurement: the fourth paragraph of the Standard Specifications is revised to read:

The contractor shall be responsible to determine the amount of cover material that will be required to complete the work from the source(s) from which the cover material is obtained.

404-8 Method of Measurement: the sixth paragraph of the Standard Specifications is revised to read:

Measurement for payment will be made only for the quantity of bituminous material and for the quantity of aggregate material used in accordance with the requirements of the specifications.

404-9 Basis of Payment: of the Standard Specifications is revised to read:

The accepted quantities of the work under this section, complete in place, measured as provided above, will be paid for at the contract unit price as designated in the bidding

schedule, except the contract unit price for the quantities of bituminous material will be adjusted on the basis of the test results in accordance with the requirements of Section 1005 of the specifications.

No measurement or direct payment will be made for precoating the cover material, material for precoating, rolling and removal of loose cover material, and removal of loose blotter material.

The contract unit price for each item of bituminous material except tack coat will be considered to include all costs for furnishing, hauling, handling, spreading, and mixing of the material as required.

The unit price for bituminous tack coat is deemed to be the cost to furnish, transport, and store asphalt cement or emulsified asphalt at the project location. Payment for bituminous tack coat will be made at the unit price multiplied by the respective payment factor listed under Subsection 404-4.02 of the specifications, and adjusted to the nearest dollar.

Unless otherwise specified, the accepted quantity of bituminous tack coat, measured as provided above, will be paid at the contract unit price per ton adjusted as provided above which price shall be full compensation for furnishing, transporting, and storing the exact type, grade or designation of bituminous tack coat specified by the Engineer.

Unless otherwise specified, the accepted quantity of time to apply bituminous tack coat, measured as provided above, will be paid for at the contract unit price per hour which payment shall be full compensation for applying bituminous tack coat.

The bidding schedule quantity for tack coat is based on an estimated application rate of 0.06 gallons per square yard for each application shown on the project plans.

The unit price of bituminous material will be adjusted in accordance with the requirements of Subsection 109.16 of the specifications based on the "initial cost" of bituminous material between the date of bid opening and the date that the material is used on the project.

No measurement or direct payment will be made for furnishing, applying and removing blotter material, furnished in conjunction with the application of a prime coat.

No measurement or direct payment will be made for the maintenance or repair of a prime coat surface.

(404MICRO, 01/26/16)

ITEM 4040076 EMULSIFIED ASPHALT (MICRO-SURFACING):
ITEM 4040171 DRY MINERAL AGGREGATE (MICRO-SURFACING)(TYPE III):

MICRO-SURFACING:

1.0 Description:

The work under these items shall consist of furnishing all materials and constructing micro-surfacing on an existing asphaltic concrete pavement surface. The micro-surfacing shall be a mixture of mineral aggregate, polymer modified emulsified asphalt, mineral filler, water, and other additives, properly proportioned, mixed, and spread on the pavement surface as specified herein and as directed by the Engineer.

The micro-surfacing shall be applied as a homogeneous mat, adhere firmly to the prepared surface, and have a skid-resistant surface texture. The finished product shall have a uniform appearance and it shall be able to accept straight, rolling traffic within one hour after placement without damage; however, stopping and starting traffic, and adverse weather conditions, may require additional curing time.

The contractor shall provide a minimum two-hour orientation session for project personnel, covering the construction process, materials control, and materials measurement by true weight delivered versus machine dial readings.

The contractor shall provide to the Engineer, on a daily basis, the quantity of material delivered versus material placed through the micro-surfacing mixer based on dial gauge readings. The Engineer will independently verify all dial gauge readings, and weight of material delivered. This information will be used as a check against the mix design proportions.

2.0 Materials:

2.01 General:

All materials shall be approved by the Engineer prior to the start of construction.

The Engineer reserves the right to sample and test any materials used on the project. All materials that do not meet specifications will be rejected.

For comparison purposes, quantities shown in the bidding schedule have been calculated based on the information given in Table 1. Application rates are affected by the unit weight and gradation of the mineral aggregate and the demand of the surface to which the micro-surfacing is being applied. Exact quantities of emulsified asphalt and dry mineral aggregate shall be determined by mix design, or as directed by the Engineer.

TABLE 1		
Material	Type II Micro-Surfacing	Type III Micro-Surfacing
Emulsified Asphalt, by weight of Dry Mineral Aggregate, percent	14	13
Dry Mineral Aggregate, pounds per square yard	22	30

2.02 Emulsified Asphalt:

Polymer modified, cationic, quick setting (mixing grade) emulsified asphalt (CQS-1hP) shall be used. A minimum of 4 percent polymer solids, by total weight of polymer and asphalt residue, shall be added prior to the millhead. The type and amount of polymer solids used shall be certified by the supplier.

The polymer modified emulsified asphalt shall be preapproved and certified in accordance with ADOT Materials Policy and Procedure Directive (P.P.D.) No. 8, "Sampling, Testing, and Acceptance of Emulsified Bituminous Materials". As specified in P.P.D. No. 8, two copies of the appropriate certificate (Certificate of Compliance or Certificate of Analysis), conforming to the requirements of Subsection 106.05 of the specifications, shall accompany each shipment (delivery unit) of emulsion to the project.

The polymer modified emulsified asphalt shall conform to the requirements of Table 2.

TABLE 2 Polymer Modified Emulsified Asphalt (CQS-1hP)		
TESTS ON EMULSION	TEST METHOD	REQUIREMENTS
Viscosity, Saybolt Furol seconds @ 25 °C (77 °F)	AASHTO T-59	20 - 100
Sieve Test, retained on No. 20, %	AASHTO T-59	0.10 Max (1)
Particle Charge	AASHTO T-59	Positive
Storage Stability Test, 24 hours, %	AASHTO T-59	1.0 Max
Percent Asphalt Residue by Evaporation	Arizona Test Method 512 (2)	60 Min
TESTS ON RESIDUE BY DISTILLATION AASHTO T-59 [176.7 °C (350 °F) Max.]	TEST METHOD	REQUIREMENTS
Kinematic Viscosity @ 135 °C (275 °F), cst	AASHTO T-201	650 Min
Penetration @ 25 °C (77 °F), 100 g, 5 seconds, 0.1 mm	AASHTO T-49	40 - 90
Softening Point, °C	AASHTO T-53	60 Min
Ductility @ 25 °C (77 °F), 5 cm/minute, cm	AASHTO T-51	60 Min
Elastic Recovery @ 25 °C (77 °F), %	AASHTO T-301 (3)	55 Min
(1) The maximum of 0.1 percent applies to the preapproval of emulsions in accordance with P.P.D. No. 8. A maximum of 0.3 percent is allowed for emulsions that are sampled at the project site. (2) The percent of asphalt residue will be determined in accordance with the requirements of Arizona Test Method 512; however, in the case of dispute the percent of asphalt residue by distillation [AASHTO T 59, modified to 176.7 °C (350 °F)] will be used. (3) Testing shall be performed on residue by distillation, not on residue by oven evaporation.		

2.03 Mineral Aggregate:

The contractor shall provide a source in accordance with the requirements of Section 1001 of the specifications.

The mineral aggregate shall consist of sound, durable crushed stone or crushed gravel. The materials shall be free from vegetation and other deleterious substances. Aggregates shall be 100 percent crushed with no rounded particles. No natural sand will be allowed.

If rut-filling is specified, mineral aggregate meeting the gradation requirements of Type III shall be used.

The gradation of the mineral aggregate shall be Type III. The gradation of the mineral aggregate, when tested in accordance with the requirements of Arizona Test Method 201, shall conform to the requirements of Table 3.

TABLE 3			
SIEVE SIZE	PERCENT PASSING SIEVES		
	MIX DESIGN GRADING LIMITS		PRODUCTION TOLERANCES (See Note Below)
	TYPE II	TYPE III	
3/8 inch	100	100	----
No. 4	90-100	70-90	± 5
No. 8	65-90	45-70	± 5
No. 16	45-70	28-50	± 5
No. 30	30-50	19-34	± 5
No. 50	18-30	12-25	± 4
No. 100	10-21	7-18	± 3
No. 200	5.0–15.0	5.0–15.0	± 3.0
Note: The allowable tolerance during production will be determined by applying the production tolerances to the mix design target values. However, the allowable production tolerance shall not fall outside the mix design grading limits in this table.			

The mineral aggregate shall conform to the requirements of Table 4 when tested in accordance with the applicable test methods.

TABLE 4 MINERAL AGGREGATE CHARACTERISTICS		
CHARACTERISTIC	TEST METHOD	REQUIREMENTS
Sand Equivalent	AASHTO T 176 (After thoroughly sieving the sample, no additional cleaning of the fines from the plus No. 4 material is required.)	Minimum 60
Carbonates	Arizona Test Method 238	Maximum 20%
Abrasion	AASHTO T 96	500 Rev., Maximum 40%
Fractured Coarse Aggregate Particles	Arizona Test Method 212	Minimum 95% (with at least one fractured face)
Uncompacted Void Content	Arizona Test Method 247	Minimum 45.0%

Tests on aggregates outlined in Table 4, other than abrasion, shall be performed on materials furnished for mix design purposes and composited to the mix design gradation. Abrasion testing shall be performed separately for each source of mineral aggregate. All sources shall meet the requirements for abrasion. If desired, abrasion testing may be performed utilizing the parent aggregate from each source. Historical abrasion values may be supplied on sources provided the testing was conducted within the past two years.

2.04 Mineral Filler:

Mineral filler, required by the mix design, shall be Type I or Type II Portland cement conforming to the requirements of ASTM C 150. The mineral filler shall be added by weight of dry aggregate as specified by the mix design. The source of Portland cement must be on the ADOT Approved Materials Source List, as referenced in Materials Policy and Procedure Directive (P.P.D.) No. 13, "Certification and Acceptance of Hydraulic Cements, Fly Ash, Natural Pozzolan, Silica Fume, and Lime".

The mineral filler shall be added to the micro-surfacing mixture by an approved method that will ensure uniform distribution and proper control.

2.05 Water:

The water used shall be free of any injurious impurities. Potable water obtained from public utility distribution lines will be acceptable. The contractor shall state the source of water.

2.06 Additives:

Additives may be used to accelerate or retard the breaking of the emulsified asphalt and the set time of the micro-surfacing mixture or improve the resulting finished surface.

Appropriate additives, and their applicable use range, shall be specified in the mix design.

3.0 Mix Design:

The contractor shall provide a mix design which has been sealed, signed, and dated by a professional engineer experienced in the preparation of micro-surfacing mix designs.

Compatibility of the aggregate, mineral filler, water, additives, and polymer modified emulsified asphalt shall be evaluated during the mix design process.

All the materials used in the mix design shall be representative of the materials proposed by the contractor for use on the project.

The mix design shall be approved by the Engineer prior to the start of micro-surfacing production. After the mix design has been approved, no material substitution will be permitted unless approved by the Engineer.

In addition to the other requirements stated herein, the mix design shall conform to the requirements of Table 5.

TABLE 5		
PROPERTY	TEST METHOD	REQUIREMENTS
Residual Asphalt Content	ASTM D 2172	6.0% - 11.5%, by weight of dry aggregate
Mineral Filler	----	0.1% - 2.0%, by weight of dry aggregate
Additives	----	As required for mix properties
Water	----	As required for mix properties
Mix Time @ 77 °F	ISSA TB-113	Controllable to 120 seconds, Minimum
Wet Track Abrasion Loss (1 hour soak)	ISSA TB-100	50 g/ft ² , Maximum
Wet Track Abrasion Loss (6 day soak)	ISSA TB-100	75 g/ft ² , Maximum
Wet Stripping	ISSA TB-114	90%, Minimum
Cohesion, within 30 minutes (Set)	ISSA TB-139	12 kg-cm torque, Minimum
Cohesion, within 60 minutes (Traffic)	ISSA TB-139	20 kg-cm torque, Minimum
Loaded Wheel Sand Adhesion	ISSA TB-109	50 g/ft ² , Maximum
Classification Compatibility	ISSA TB-144	11 Grade Points, Minimum (AAA, BAA)
Lateral Displacement	ISSA TB-147	5%, Maximum
Specific Gravity after 1,000 cycles of 125 lb.	ISSA TB-147	2.10, Maximum

The mix design shall include test results showing the quantitative effects of moisture content on the unit weight of the aggregate (bulking effect) according to AASHTO T 19.

The mix design shall show the recommended proportions of aggregate, mineral filler, water, additive(s), and emulsified asphalt; and how the proportions are based (dry aggregate weight, total mix, etc). The mix design shall also show the allowable production tolerance for residual asphalt content.

The mix design shall also show the aggregate gradation, sand equivalent, percent carbonates, abrasion, fractured coarse aggregate particles, and uncompacted void content of the aggregate used in the mix design.

4.0 Equipment:

4.01 Proportioning Devices:

Individual volume or weight controls for proportioning mix components shall be provided and properly labeled. Proportioning devices shall be capable of determining the material output at any time.

The proportioning of emulsion, mineral filler, water, and additives shall be tied directly to aggregate flow.

4.02 Mixing Equipment:

(A) General:

The machine shall be specifically designed and manufactured to apply micro-surfacing. The material shall be mixed by an automatic-sequenced, self-propelled micro-surfacing mixing machine. It shall be a continuous-flow mixing unit that accurately delivers and proportions the mix components through a revolving multi-blade, double-shafted mixer. Sufficient storage capacity for all mix components is required to maintain an adequate supply to the proportioning controls.

The machine shall be a continuous-run machine capable of loading materials while continuing to apply micro-surfacing. The machine shall be equipped to provide the operator with full control of the forward and reverse speeds during application. It shall be equipped with opposite-side driver stations to assist in alignment. The self-loading device, opposite-side driver stations, and forward and reverse speed controls shall be of original-equipment-manufacturer design.

The machine shall be equipped with a water pressure system that provides a water spray immediately ahead of and outside the spreader box.

Truck mounted mixing machines are not allowed.

(B) Calibration:

Each mixing unit to be used in the performance of the work shall be calibrated in the presence of the Engineer prior to the start of micro-surfacing production. Previous calibration documentation covering the exact materials to be used may be acceptable, provided the calibration was performed within the preceding 60 days. The documentation shall include an individual calibration of each material at various settings that can be related to the machine metering devices. Any component replacement affecting material proportioning requires that the machine be recalibrated. No machine will be allowed to work on the project until the calibration has been completed and/or accepted. The ISSA Inspector's Manual describes a method that may be used for machine calibration.

4.03 Spreading Equipment:

(A) General:

The mixture shall be agitated and spread uniformly in the surfacing box by means of twin-shafted paddles or spiral augers fixed in the spreader box. A front seal shall be provided to ensure no loss of the mixture at the road contact point. The rear seal shall act as a final strike-off and shall be adjustable. The spreader box and rear strike-off shall be so designed and operated that a uniform consistency is achieved and a free flow of material is provided to the rear strike-off. The spreader box shall have suitable means provided to side shift the box to compensate for variations in the pavement geometry.

The spreading equipment shall be maintained free from buildup of the mixture on the paddles or side walls.

(B) Secondary Strike-Off:

A secondary strike-off shall be provided to improve surface texture. The secondary strike-off shall be adjustable to match the width of the spreader box and allow for varying pressures to control the surface texture.

(C) Rut-Filling Equipment:

When required, micro-surfacing material may be used to fill ruts or other depressions in the existing surface. Ruts shall be filled independently with a rut-filling box. Ruts may require multiple applications with the rut-filling box to restore the cross-section. All rut-filling material should cure under traffic for at least 24 hours before additional material is placed.

4.04 Auxiliary Equipment:

Areas that cannot be reached with the micro-surfacing machine shall be surfaced using hand squeegees to provide complete and uniform micro-surfacing coverage.

5.0 Construction Requirements:

5.01 Test Strip:

A test strip shall be constructed on the roadway at the beginning of the first day of production. The test strip shall be limited to 500 to 1000 feet in length and shall be placed in the same manner, and with the same materials and equipment, that will be used during the remainder of micro-surfacing placement.

The test strip shall not exhibit any signs of distress when exposed to traffic after curing for one hour. The Engineer shall determine if performance of the test strip is satisfactory. If performance of the test strip is satisfactory, normal production may proceed. If performance of the test strip is unsatisfactory, the test strip shall be removed and replaced, or repaired to the satisfaction of the Engineer, at no additional cost to the Department. After necessary adjustments are made, an additional test strip shall be constructed. If necessary, the Engineer may require that a new mix design be submitted for approval.

5.02 Weather Limitations:

The micro-surfacing shall only be placed when there is no rain, the air temperature is at least 45 degrees F, and the pavement surface temperature is 50 degrees F or higher. No micro-surfacing shall be applied when there is danger that the finished product will freeze within 24 hours following its placement. The mixture shall not be applied if weather conditions prolong opening to traffic beyond a reasonable time as determined by the Engineer.

At any time, the Engineer may require that the work cease or that the workday be reduced in the event that weather conditions, either existing or expected, are anticipated to have an adverse effect upon the micro-surfacing.

5.03 Surface Preparation:

Immediately prior to applying the micro-surfacing, the contractor shall clean the surface of all loose material, dirt, vegetation, and other objectionable material. If water is used, cracks shall be thoroughly dry before applying the micro-surfacing. The Engineer shall approve the surface preparation prior to applying the micro-surfacing.

5.04 Mixing and Application of Micro-Surfacing:

The micro-surfacing mixture shall be proportioned in accordance with the mix design.

The contractor shall determine the stockpile moisture content daily and adjust the operation accordingly.

The micro-surfacing mixture shall be of the desired consistency when deposited in the spreader box and no additional materials shall be added to it. The mixing time shall be sufficient to produce a complete and uniform coating of the aggregate. No lumping, balling, or unmixed aggregate shall be permitted. The mixture shall be discharged into the spreader box at a sufficient rate to maintain an ample supply across the full width of the spreader box at all times. Overloading of the spreader box shall be avoided. No streaks, such as those caused by oversized aggregate, will be left in the finished surface. If excess oversize aggregate is encountered, the job will be stopped until the contractor proves that the situation has been corrected. Any skips, lumps, streaks, or tears in the finished product will not be allowed. The contractor shall repair any such deficiencies to the satisfaction of the Engineer, at no additional cost to the Department.

The micro-surfacing mixture shall possess sufficient stability so that premature breaking of the emulsified asphalt while the mixture is in the spreader box does not occur. The mixture shall be homogeneous after mixing. During spreading, the mixture shall be free of excess water or emulsion and shall be free of segregation of the emulsion and aggregate fines from the coarser aggregate. Spraying of additional water into the spreader box is not allowed.

The surface of the existing pavement shall be pre-wetted by fogging with water ahead of the spreader box. The water used in pre-wetting the surface shall be applied such that the entire surface is damp with no apparent flowing water in front of the spreader box. The rate of application of the fog spray shall be adjusted during the day as the ambient temperature, surface texture, humidity, and dryness of the pavement surface changes.

The surface texture variation of the existing pavement throughout the work will dictate the actual spreading rates. The strike-off squeegee shall be adjusted to provide a micro-surfacing thickness which will completely fill the surface voids and provide an additional thickness not exceeding one and one-half times the largest top-size stone. The requirement for an additional thickness not exceeding one and one-half times the largest top-size stone does not apply to rut-filling operations, as these depths may vary significantly due to the surface irregularities.

The contractor shall remove micro-surfacing from any area specified by the Engineer.

The contractor shall remove any debris associated with the performance of the work on a daily basis.

5.05 Protection of Existing Features:

The contractor shall take all necessary precautions to prevent micro-surfacing or other materials used in the work from entering or adhering to gutters, gratings, hydrants, valve boxes, manhole covers, catch basins, bridge or culvert decks, permanent road markers (ceramic and reflective), and other existing fixtures.

Immediately after surfacing, the contractor shall clean and leave existing features in a condition satisfactory to the Engineer.

5.06 Joints:

No excessive buildup, untreated areas, or unsightly appearance shall be permitted on longitudinal or transverse joints. The contractor shall provide suitable width spreading equipment to produce a minimum number of longitudinal joints throughout the work. When possible, longitudinal joints shall be located within 1 foot of the center of a lane or within 1 foot of the centerline between two adjacent lanes. A 4-inch maximum overlap will be permitted on longitudinal joints. Partial width passes shall only be used when necessary and shall not be the last pass of any paved area. Longitudinal joints shall have no more than a 1/4-inch difference in elevation when measured by placing a 10-foot straightedge over the joint.

Care shall be taken to ensure straight lines along curbs and shoulders. No runoff on these areas will be permitted.

Construction joints shall be neat in appearance and shall be tapered or feathered to conform to the existing surfacing. All excess material shall be removed from the surface upon completion of each run.

5.07 Handwork:

Areas which cannot be accessed by the mixing machine shall be surfaced using hand squeegees to provide complete and uniform coverage. If necessary, the area to be hand worked shall be lightly dampened prior to mix placement. As much as possible, handwork shall exhibit the same finish as that applied by the spreader box.

5.08 Damage to the Micro-Surfacing:

The contractor shall remove and replace micro-surfacing which is damaged prior to the final acceptance of the work, at no additional cost to the Department.

6.0 Sampling and Testing Requirements:

Mineral aggregate shall be sampled in accordance with Arizona Test Method 105.

At least two weeks prior to the start of micro-surfacing production, the Engineer shall obtain a representative sample of mineral aggregate for testing. The material shall be tested for gradation in accordance with Arizona Test Method 201 and shall conform to the production tolerances shown in Table 3. The sand equivalent, fractured coarse aggregate particles, and uncompacted void content shall conform to the requirements of Table 4. If the mineral aggregate does not meet these requirements, production shall not begin until the mineral aggregate is in compliance with these requirements.

For each 300 tons of mineral aggregate used in micro-surfacing production, the Engineer shall obtain a representative sample of mineral aggregate for gradation and moisture content testing. The material will be tested for gradation in accordance with Arizona Test Method 201 and shall conform to the production tolerances shown in Table 3. Should testing indicate results not meeting these requirements, operations shall cease, and the contractor shall have the option of providing a new mix design or correcting the deficiencies. The material shall be tested for moisture content in accordance with AASHTO T 265.

For each 600 tons of mineral aggregate used in micro-surfacing production, the Engineer shall obtain a representative sample of mineral aggregate for the determination of sand equivalent, fractured coarse aggregate particles, and uncompacted void content. The material shall conform to the requirements of Table 4 for these test characteristics. Should testing indicate results not meeting these requirements, operations shall cease, and the contractor shall have the option of providing a new mix design or correcting the deficiencies.

During micro-surfacing production, a representative sample of the emulsion shall be obtained for testing to determine the percent asphalt residue by evaporation. A sample shall be obtained, in accordance with Arizona Test Method 103, from each delivery unit of emulsion by the contractor and witnessed by the Engineer. The emulsion shall conform to the requirements of Table 2 for percent asphalt residue by evaporation.

7.0 Method of Measurement:

Emulsified Asphalt will be measured by the ton.

Dry Mineral Aggregate will be measured by the ton, excluding the weight of any moisture.

8.0 Basis of Payment:

The accepted quantities of Emulsified Asphalt, measured as provided above, will be paid for at the contract unit price per ton, which price shall be full compensation for the work, complete in place, as specified herein.

The accepted quantities of Dry Mineral Aggregate, measured as provided above, will be paid for at the contract unit price per ton, which price shall be full compensation for the work, complete in place, including mineral filler, water, all surface preparation, mixing and application of materials.

Payment shall be full compensation for all surface preparation, mixing and application of materials, and for all labor, equipment, tools, cleaning, and incidentals necessary to complete the work as specified herein.

No direct measurement or payment will be made for water, additives, or mineral filler, the cost being considered as included in this contract item.

(409AGGR 06/19/25)

SECTION 409 ASPHALTIC CONCRETE (MISCELLANEOUS STRUCTURAL): the title and text of the Standard Specifications is revised to read:

SECTION 409 ASPHALTIC CONCRETE (MISCELLANEOUS STRUCTURAL-SPECIAL MIX):

409-1 Description:

The work under this section shall consist of constructing Asphaltic Concrete (Miscellaneous Structural-Special Mix), hereinafter asphaltic concrete, by furnishing all materials, mixing at a plant, hauling and placing a mixture of aggregate materials, reclaimed asphalt pavement (RAP) if used, mineral admixture, and bituminous material (asphalt cement) to form a pavement course or to be used for other specified purposes, in accordance with the details shown on the project plans and the requirements of the specifications, and as directed by the Engineer.

The contractor shall acquire and make all arrangements for a source or sources of material, furnish a mix design which will meet the design criteria specified hereinafter, and provide all the equipment, materials, and labor necessary to complete the work.

409-2 Materials:

The bidding schedule quantity of asphaltic concrete is based on an estimated unit weight of **148** pounds per cubic foot.

409-2.01 Mineral Aggregate:

Mineral aggregate shall conform to the following requirements when tested in accordance with the applicable test methods.

Mineral Aggregate Characteristics	Test Method	Requirement
Combined Bulk Oven Dry Specific Gravity	Arizona Test Method 251	2.350 - 2.850
Combined Water Absorption	Arizona Test Method 251	0 – 3.0%
Abrasion	AASHTO T 96	100 Rev., Max 9% 500 Rev., Max 40%
Sand Equivalent	AASHTO T 176 (After thoroughly sieving the sample, no additional cleaning of the fines from the plus No. 4 material is required.)	Minimum 55
Fractured Coarse Aggregate Particles	AASHTO T 335	Minimum 85% with at least two fractured faces and minimum 92% with at least one fractured face (plus No. 4 material)
Uncompacted Void Content	AASHTO T 304 Method A	Minimum 45.0%
Carbonates (1)	Arizona Test Method 238	Maximum 20%
(1): Testing for carbonates only applies if either of the following conditions exist: (a) The asphaltic concrete is the designed final pavement surface normally used by traffic. (b) The asphaltic concrete, temporary or otherwise, will be subject to traffic for more than 60 days.		

The gradation will be determined in accordance with AASHTO T 11 and AASHTO 27, and shall conform to the requirements given below.

Mix Design Grading Limits				
Sieve Size	Percent Passing			
	1/2 Inch Mix		3/4 inch Mix	
	Without Admixture	With Admixture	Without Admixture	With Admixture
1-1/4 Inch	---	---	---	---
1 Inch	---	---	100	100
3/4 Inch	100	100	90-100	90-100
1/2 Inch	90 - 100	90-100	---	---
3/8 Inch	67 - 82	67 - 82	62 - 77	62 - 77
No. 8	40 - 48	41 - 49	37 - 46	38 - 47
No. 40	10 - 18	11 - 19	10 - 18	11 - 19
No. 200	1.5 - 4.5	2.5 – 6.0	1.5 - 4.5	2.5 - 6.0

Fine mineral aggregate shall be obtained from crushed gravel or crushed rock. All uncrushed material passing the No. 4 sieve shall be removed prior to the crushing, screening, and washing operations necessary to produce the specified gradation. The contractor shall notify the Engineer a minimum of 48 hours in advance of crushing the material to be used as mineral aggregate, so all crushing operations can be inspected. Existing stockpile material which has not been inspected during crushing will not be permitted for use unless the contractor is able to document to the Engineer's satisfaction that the mineral aggregate has been crushed. Any material inspected by the Department as crushed material for the project shall be separated from the contractor's other stockpiles and reserved for use throughout the project duration.

The contractor may blend uncrushed fine aggregate up to a maximum of 15 percent of the total aggregate, provided that the composite of uncrushed fine aggregate and crushed fine aggregate meets the requirement for uncompacted void content. The uncrushed fine aggregate shall be 100 percent passing the 1/4 inch and not contain more than 4.0 percent passing the No. 200 sieve. Should the contractor modify the method of producing either the uncrushed or crushed fine aggregate, the Engineer shall be immediately notified and the materials sampled and tested for determination of uncompacted void content.

409-2.02 Bituminous Material:

Asphalt cement shall be a performance grade (PG) asphalt binder, conforming to the requirements of Section 1005 of the specifications. The type of asphalt binder shall be **PG 76-22 PM**.

The percent of asphalt cement used shall be based on the weight of total mix (asphalt cement, mineral aggregate, and mineral admixture).

The contractor shall provide the laboratory mixing and compaction temperature ranges to the mix design laboratory for each PG asphalt binder used for mix design purposes. The laboratory mixing temperature range is defined as the range of temperatures where the un-

aged asphalt binder has a rotational viscosity of 0.17 ± 0.02 Pascal-seconds, measured in accordance with AASHTO T 316. The laboratory compaction temperature range is defined as the range of temperatures where the un-aged asphalt binder has a rotational viscosity of 0.28 ± 0.03 Pascal-seconds, measured in accordance with AASHTO T 316. The testing required in AASHTO T 316 shall be performed at 275 degrees F and 350 degrees F, and a viscosity-temperature curve developed in accordance with ASTM D2493. The viscosity-temperature curve shall be included in the mix design report. For PG asphalt binders that have a maximum laboratory mixing temperature exceeding 325 degrees F or a maximum laboratory compaction temperature exceeding 300 degrees F, the laboratory mixing and compaction temperature ranges shall be specified in writing by the asphalt binder supplier. The laboratory mixing and compaction temperature ranges, as well as the actual laboratory mixing and compaction temperatures used, shall be reported on the mix design. The contractor shall ensure that the asphalt binder supplier information required in this paragraph is provided to all appropriate parties in a timely manner, and that copies are included in the mix design report. The laboratory mixing and compaction temperatures are for mix design purposes only. Field mixing and compaction temperatures are specified in Subsection 409-3 of the specifications.

409-2.03 Mineral Admixture:

Mineral admixture shall be either Portland cement, blended hydraulic cement, or hydrated lime conforming to the following requirements:

Material	Requirement
Portland Cement, Type I or II	ASTM C150
Blended Hydraulic Cement, Type IP or 1L	ASTM C595
Hydrated Lime	ASTM C1097

The mineral admixture content shall be 2.0 percent, by weight, of the mineral aggregate. However, a minimum of 1.0 percent mineral admixture may be used if the contractor submits test information showing a lowered percentage of mineral admixture produces mix design results for Index of Retained Strength of at least 60 percent (70 percent if the average elevation of the project is above 3,500 feet) and a Minimum Wet Strength of 150 psi when tested in accordance with Arizona Test Method 802.

The certification and acceptance of Portland cement, blended hydraulic cement, and hydrated lime shall be in accordance with ADOT Materials Practice and Procedure Directive No. 13, "Certification and Acceptance of Hydraulic Cement, Fly Ash, Natural Pozzolan, Silica Fume, and Lime".

409-2.04 Mix Design:

Utilizing mineral aggregate which has been crushed, processed, separated, and stockpiled, a mix design shall be formulated and submitted by the contractor to the Engineer. The mineral aggregate samples used for mix design purposes shall be representative of aggregate materials to be used during production.

The mix design shall be based on the mix design criteria and other requirements specified herein, utilizing asphalt cement and mineral admixture of the type and from the sources proposed for use in the production of asphaltic concrete.

Mix designs shall be developed utilizing a minimum ratio of three (3) for the lift thickness to nominal maximum aggregate size.

The mix design shall be prepared by or under the direct supervision of a professional engineer experienced in the development of mix designs and mix design testing. Reclaimed asphalt pavement (RAP) may be used in the mixture if properly designed per Arizona Test Method 833. Limits for the usage of RAP shall be per ADOT Materials Practice and Procedure Directive No. 20, "Guidance on the Use of Reclaimed Asphalt Pavement (RAP) in Asphaltic Concrete". The mix design engineer shall meet the requirements given in ADOT Materials Practice and Procedure Directive No. 4, "Asphaltic Concrete Mix Design Proposals and Submittals". The mix design shall be provided in a format that clearly indicates all the mix design requirements and shall be sealed, signed, and dated by the mix design engineer.

The mix design shall be prepared by a mix design laboratory that has met the requirements of ADOT Materials Practice and Procedure Directive No. 19, "ADOT System for the Evaluation of Testing Laboratories".

If approved by the Engineer, as an alternative to meeting the mix design requirements specified herein, a mix design meeting the requirements of the specifications for a Section 416 Asphaltic Concrete (End Product) (1/2 inch Special Mix), Section 416 Asphaltic Concrete (End Product) (3/4 inch Special Mix), Section 417 Asphaltic Concrete (SHRP) (End Product) (1/2 inch Mix), or Section 417 Asphaltic Concrete (SHRP) (End Product) (3/4 inch Mix) may be substituted for use. The type of asphalt binder used in the alternative mix design must be the same as that specified in Subsection 409-2.02 of the specifications. The alternative mix design may include reclaimed asphalt pavement (RAP) if properly designed per Arizona Test Method 833. If a mix design meeting the requirements of Section 417 is used, the number of gyrations for N-design used in the alternative mix design must be at least that which would be specified at the location where the Asphaltic Concrete (Miscellaneous Structural-Special Mix) is to be placed. The lift thickness for the alternative mix design shall conform to the following table:

Alternative Mix Design	Minimum Lift Thickness
Section 416 (1/2 Inch Special Mix)	1-1/2 Inches
Section 416 (3/4 inch Special Mix)	2 inches
Section 417 (1/2 inch Mix)	2 inches
Section 417 (3/4 inch Mix)	2-1/2 inches

The contractor may propose the use of a mix design that has been developed for a previous project. The proposed mix design shall meet the requirements of these specifications. The contractor shall provide evidence that the type and source of bituminous material, the type of mineral admixture, and the source and methods of producing mineral aggregate, and RAP material if applicable, have not changed since the formulation of the previous mix design. The contractor shall also provide current test results for all specified characteristics of the mineral aggregate, and RAP material if applicable, proposed for use. The Engineer will determine if

the previously used mix design is suitable for the intended use and if the previous use of the mix design was satisfactory to the Department. The Engineer will either approve or disapprove the proposed mix design. Should the Engineer disapprove the use of the previously used mix design, the contractor shall prepare and submit a new mix design proposal in accordance with the requirements of these specifications.

A previously used mix design older than two years from the date it was formulated, sealed, signed, and dated shall not be allowed for use. Once approved for use on a project, a previously used mix design may be used for the duration of that project.

Test results used in the formulation of the mix design must be from testing performed no earlier than 45 days prior to the date the mix design is signed by the mix design engineer. Historical abrasion values may be supplied on sources provided the testing was conducted within the past two years.

The mix design shall be submitted to the Engineer under a cover letter signed by an authorized representative of the contractor.

A copy of the mix design and representative samples of the mineral aggregate, mineral admixture, and asphalt cement used in the mix design shall be submitted to the Engineer for calibration of the ignition furnace, and for the determination of sand equivalent, fractured coarse aggregate particles, and uncompacted void content. The Engineer shall witness the sampling of the mineral aggregate. The mix design and samples shall be submitted to the Engineer at least five working days prior to the start of asphaltic concrete production.

The sand equivalent, fractured coarse aggregate particles, and uncompacted void content shall meet the requirements specified in Subsection 409-2.01 of the specifications. Additional testing of the uncrushed and crushed fine aggregate for uncompacted void content will be required if the method of producing either fine aggregate is modified.

If the mineral aggregate fails to meet the requirements specified herein, asphaltic concrete production shall not commence, and the contractor shall either submit a revised mix design which is representative of the materials produced or correct the deficiencies in the aggregate stockpiles.

The mix design shall meet the following criteria when tested in accordance with the requirements of the following test methods:

Criteria	Requirement	Arizona Test Method
1. Voids in Mineral Aggregate: %, Range	15.0 – 18.0	(See Note)
2. Effective Voids: %, Range	3.8 – 4.2	(See Note)
3. Absorbed Asphalt: %, Range	0 – 1.0	(See Note)
Note: For mixes without RAP, Arizona Test Method 815. For mixes with RAP, Arizona Test Method 833.		

The contractor may make self-directed target changes to the approved mix design within the limits shown below. Requests for self-directed target value changes shall be made in writing

and acknowledged by the Engineer prior to start of production. Self-directed target changes shall meet contract requirements for mix design criteria and grading limits.

MEASURED CHARACTERISTICS	ALLOWABLE SELF-DIRECTED TARGET VALUE CHANGES
Gradation (sieve size): 3/8 inch No. 8 No. 40 No. 200	$\pm 4\%$ from mix design target value $\pm 4\%$ from mix design target value $\pm 2\%$ from mix design target value $\pm 0.5\%$ from mix design target value
Asphalt Cement Content	$+0.2\%$ from mix design target value
Effective Voids	None

The contractor may propose target value changes to the approved mix design for the Engineer's approval. The Engineer will determine if the proposed target value change will result in mix production that meets the contract requirements for mix design criteria and grading limits. For acceptance purposes, target value changes will not be retroactive.

In no case shall the approval of mix design changes relieve the contractor of the responsibility for the results obtained by the use of such approved changes.

409-2.05 Sampling and Testing:

Sampling and testing the materials and mixture for quality control purposes shall be the contractor's responsibility. The contractor shall perform sufficient testing to assure that mineral aggregate and asphaltic concrete are produced which meet all specified requirements.

For acceptance purposes, samples of the asphaltic concrete shall be taken by the contractor, under the observation of the Engineer, at random locations designated by the Engineer. A minimum of one sample shall be taken for each 500 tons of asphaltic concrete. Samples shall be taken in accordance with the requirements of the plate method in AASHTO R 97. The Engineer will immediately take custody of the samples. The material will be tested by the Engineer for the following properties:

Test Property	Test Method
Asphalt Cement Content	AASHTO T 308 (for both Non-RAP and RAP mixes) (See Note)
Gradation	
Marshall Density	AASHTO R 68
Maximum Theoretical Density	AASHTO T 209
Effective Voids	AASHTO T 269
Note: A new calibration of the ignition furnace shall be performed for each mix design, and at any other time the Engineer directs.	

409-3 Construction Requirements:

409-3.01 General:

All courses of asphaltic concrete shall be compacted as required, smooth and true to the required lines, grades, and dimensions.

- (B) The surface of the final lift of asphaltic concrete placed under this section of the specifications shall be tested and shall not vary by more than 1/8 inch from the lower edge of a 10-foot straightedge when it is placed in the longitudinal direction (including across transverse joints), and when it is placed in the transverse direction across longitudinal joints;
- (C) The surface of any lift of asphaltic concrete placed under this section of the specifications, other than the final lift, shall be tested and shall not vary by more than 1/4 inch from the lower edge of a 10-foot straightedge when it is placed in the longitudinal direction (including across transverse joints), and when it is placed in the transverse direction across longitudinal joints; and
- (D) All deviations exceeding the specified tolerances above shall be corrected by the contractor, to the satisfaction of the Engineer.

The asphaltic concrete hot plant shall conform to the requirements of Section 403 of the specifications.

The moisture content of the asphaltic concrete immediately behind the paver shall not exceed 0.5 percent. The moisture content will be determined in accordance with the requirements of AASHTO T 329.

Asphaltic concrete shall be placed only when the temperature of the surface on which the asphaltic concrete is to be placed is at least 65 degrees F.

At any time, the Engineer may require that the work cease or that the work day be reduced in the event that weather conditions, either existing or expected, are anticipated to have an adverse effect upon the asphaltic concrete.

All wheels and tires of compactors shall be wetted with water, or if necessary soapy water, or a release agent in order to prevent the sticking of asphaltic concrete. All other equipment surfaces shall be treated when necessary with a release agent. Only release agents evaluated through AASHTO Product Evaluation & Audit Solutions (formerly NTPEP) are acceptable for use. The results from AASHTO Product Evaluation & Audit Solutions (formerly NTPEP) testing, when tested in accordance with AASHTO T 383, shall conform to the requirements shown in the table below:

RELEASE AGENT TEST	REQUIREMENT
Asphalt Stripping Test	
Diluted	No Stripping
Non-Diluted (Full Strength)	No Stripping
Asphalt Performance Test	Less than or equal to 10.0% after the third cycle

Release agents which degrade, dissolve, or in any way damage the bituminous material shall not be used. Diesel fuel shall not be used as a release agent.

Asphaltic concrete immediately behind the laydown machine shall be in a thoroughly mixed, free-flowing, and workable condition, be free of lumps and crusts, and have a minimum temperature of 275 degrees F.

All courses of asphaltic concrete shall be placed and finished by means of self-propelled paving machines except under certain conditions or at certain locations where the Engineer deems the use of self-propelled paving machines impractical.

The speed of the paving machine shall be coordinated with the production of the plant and an adequate number of trucks for hauling asphaltic concrete shall be available in order to achieve, as far as practical, a continuous operation.

Self-propelled paving machines shall spread the mixture within the specified tolerances, without segregation or tearing, true to the line, grade, and crown indicated on the project plans. Pavers shall be equipped with hoppers and augers which will distribute the mixture uniformly in front of adjustable screeds.

Pavers shall be equipped with a screed for the full width being paved, heated if necessary, and capable of spreading and finishing all courses of asphaltic concrete.

Pavers shall be equipped with automatic screed controls with sensors for either or both sides of the paver, capable of sensing grade from an outside reference line, sensing the transverse slope of the screed, and providing the automatic signals which operate the screed to maintain the desired grade and transverse slope.

Failure of the control system to function properly shall be cause for the suspension of the placing of asphaltic concrete.

The base or subgrade upon which asphaltic concrete is to be placed shall be prepared and maintained in a firm condition until asphaltic concrete is placed. It shall not be frozen or excessively wet.

Before asphaltic concrete is placed, the surface to be paved shall be cleaned of all objectionable material and tacked with bituminous material in accordance with the requirements of Section 404 of the specifications.

Longitudinal joints of each course shall be staggered a minimum of 1 foot with relation to the longitudinal joint of any immediate underlying course. Longitudinal joints shall be located within 1 foot of the center of a lane or within 1 foot of the centerline between two adjacent lanes.

The contractor shall schedule its paving operations to minimize exposed longitudinal edges. Unless otherwise approved by the Engineer, the contractor shall limit the placement of asphaltic concrete courses, in advance of adjacent courses, to one shift of asphaltic concrete production. The contractor shall schedule its paving operations in such a manner to eliminate exposed longitudinal edges over weekends or holidays.

409-3.02 Compaction:

Compaction shall consist of an established sequence of coverage using specified types of compactors. A pass shall be defined as one movement of a compactor in either direction. Coverage shall be the number of passes as are necessary to cover the entire width being paved.

The rolling sequence, the type of compactor to be used and the number of coverages required shall be as follows:

Rolling Sequence	Type of Compactor		No. of Coverages	
	Option No. 1	Option No. 2	Option No. 1	Option No. 2
Initial	Static Steel	Vibrating Steel	1	1
Intermediate	Pneumatic Tired	Vibrating Steel	2 - 6*	2 - 4*
Finish	Static Steel	Static Steel	1 - 3	1 - 3
Note: * Based on the roller pattern which exhibits the best performance.				

The Engineer shall select the option for compaction and, when pneumatic-tired compactors are used, will designate the tire pressure.

Steel wheel compactors shall not be used in the vibratory mode for courses of 1 inch or less in nominal thickness nor when the temperature of the asphaltic concrete falls below 180 degrees F. Steel wheel compactors shall weigh not less than 8 tons.

Initial and intermediate compaction shall be completed before the temperature of the asphaltic concrete falls below 200 degrees F. All edges shall be rolled with a pneumatic tired compactor, or other methods approved by the Engineer, while the mixture is still hot.

Compaction will be deemed to be acceptable on the condition that the asphaltic concrete is compacted using the type of compactors specified, ballasted and operated as specified and with the number of coverages of the compactors as specified.

409-3.03 Acceptance:

Asphaltic concrete will be accepted complete in place unless the result of any test varies from the contractor's mix design target value (TV) as follows:

Test Property	Allowable Variation from Target Value	
Gradation (Sieve sizes)		
3/8 inch	TV – 10.0	TV + 10.0
No. 8	TV – 8.0	TV + 8.0
No. 40	TV – 6.0	TV + 6.0
No. 200	TV – 2.5	TV + 2.5
Asphalt Cement Content	TV – 0.60	TV + 0.70
Effective Voids	TV – 2.5	TV + 2.0

Within 25 days after receiving notice of any failing test result(s), the contractor may submit a written proposal to accept the material represented by the failing test result(s), in place, at a reduction in cost. If the failing test result(s) are only on Asphalt Cement Content and/or Effective Voids, the reduction in cost will be \$5.00 per ton. If the failing test result(s) are only on Gradation, the reduction in cost will be \$3.00 per ton. If the failing test result(s) are on Asphalt Cement Content and/or Effective Voids, and also on Gradation, the reduction in cost will be \$5.00 per ton. The proposal shall contain an engineering analysis of the anticipated performance (i.e. reduction in serviceability, in years) of the asphaltic concrete if left in place. The engineering analysis shall also detail the potential root cause of the problem, any proposed corrective action, and the anticipated effect of such corrective action on the performance. The engineering analysis shall only include acceptance or referee test results, as applicable to the standard specifications. The engineering analysis shall include the expected additional cost to the Department (over original performance life) to maintain the pavement at an acceptable condition. The engineering analysis shall include supporting information such as pictures of the area, control charts, plant and field records, etc. The engineering analysis shall be performed by an independent professional engineer, who is not an employee of the contractor or materials supplier, experienced in asphaltic concrete testing and the development of asphaltic concrete mix designs.

Within three working days, the Engineer will determine whether or not to accept the contractor's proposal. If the proposal is accepted, the asphaltic concrete shall remain in place, at a reduction in cost per ton, as described above, and any necessary corrective action shall be performed at no additional cost to the Department. If the proposal is not accepted, the asphaltic concrete shall be removed at no additional cost to the Department and replaced with asphaltic concrete meeting the requirements of these specifications.

The contractor may request that a sample with a failing test result(s) on gradation and/or asphalt cement content be allowed to remain in place without the completion of an engineering analysis if the application of a self-directed target value change as outlined in section 409-2.04 would have brought the failing test result(s) to within the specified tolerances. This proposal must be made to the Engineer in writing with justification. Once accepted, the material will be allowed to remain in place at the maximum negative pay factor(s). Maximum negative are defined as a minus \$3.00 per ton for mixture properties lots

in reject for Gradation only, minus \$5.00 per ton for mixture properties lots in reject for Asphalt Cement Content and/or Effective Voids only, and minus \$5.00 per ton for mixture properties lots in reject for Asphalt Cement Content and/or Effective Voids and also Gradation.

If the asphaltic concrete, represented by failing test results, is used as temporary pavement which will be removed prior to, or after, the completion of construction, the Engineer reserves the right to waive the engineering analysis and accept the material in place, at a cost reduction described above, provided the temporary pavement maintains the functionality of the intended use for the duration of the project.

409-4 Method of Measurement:

Asphaltic concrete will be measured by the ton for the mixture actually used, which will include the weight of mineral aggregate, bituminous material, and mineral admixture. Measurement will include any weight used in construction of intersections, turnouts, curbs, spillways and spillway inlets, ditches, catch basin entrances, median strips, sidewalks, or other miscellaneous items or surfaces.

409-5 Basis of Payment:

409-5.01 General:

The accepted quantities of asphaltic concrete, measured as provided above, will be paid for at the contract unit price per ton for the bituminous mixture complete in place.

No direct payment will be made for the bituminous material and mineral admixture in the asphaltic concrete, or the bituminous material for tack coat and application of tack coat, the price being considered as included in the price paid for asphaltic concrete.

Asphaltic concrete may be measured, by volume, upon the execution of a supplemental agreement which will specify the manner in which the volume is determined. The volume will include the volume of mineral aggregate, bituminous material, mineral admixture, and any necessary blending material.

409-5.02 Reduction for Noncompliance:

A reduction in payment to the contractor for asphaltic concrete will be made for asphalt cement (bituminous material) that do not meet the requirements of Section 1005 as determined by corresponding test results. Adjustments in payment will be made in accordance with the requirements of Table 1005-1.

(501PIPE, 01/20/22)

SECTION 501 PIPE CULVERTS AND STORM DRAINS:

501-3.02(A)(1) GENERAL: the last paragraph of the Standard Specifications is revised to read:

Bedding material for all metal pipe shall have a value of resistivity not less than 2,000 ohm-centimeters unless otherwise specified or approved by the Engineer. Bedding material shall have a pH value between 6.0 and 10.0, inclusive, for all metal pipe installations except aluminum. Bedding material for aluminum pipe installations shall have a pH value between 6.0 and 9.0, inclusive. Bedding material shall have a pH value between 6.0 and 12.0, inclusive, for all concrete or plastic pipe installations. Tests for pH and resistivity shall be in accordance with the requirements of Arizona Test Method 236.

(601PCC, 09/21/23)

SECTION 601 CONCRETE STRUCTURES:

601-3.03(C) Pumping Concrete: of the Standard Specifications is revised to read:

Where concrete is conveyed and placed by mechanically applied pressure, the equipment shall be of suitable type and shall have adequate capacity for the work. The concrete shall not flow either over or through any piping, fittings or equipment which is fabricated of aluminum or aluminum alloys. The operation of the pump shall be such that a continuous stream of concrete without air pockets is produced. Excessive segregation due to high velocity discharge of the concrete will not be permitted. When pumping is completed, the concrete remaining in the pipeline, if it is to be used, shall be ejected in such a manner that there is no contamination of the concrete or segregation of the ingredients. Standby equipment shall be readily available to replace initial pumping equipment should breakdown occur.

(605STRF, 8/21/25)

SECTION 605 STEEL REINFORCEMENT:

605-3.01 General: the sixth paragraph of the Standard Specifications is revised to read:

Reinforcement shall be accurately fabricated and placed as shown on the plans and shall be firmly held in place by wire ties at all intersections and splices with 16 gauge or heavier tie wires and with precast mortar blocks or ferrous metal chairs, spacers, metal hangers, supporting wires, or other approved supports at the spacing necessary to maintain the specified clearance of the reinforcement steel. The use of pebbles, broken stone, concrete masonry blocks, brick, metal pipe, or wood blocks will not be permitted for the purpose of spacing or support.

The contractor has the option to submit a request detailing the use of contract or buried bars, including supporting drawings, for review and approval by the Engineer.

For reinforcement spacing is greater than or equal to 12 inches in either the longitudinal or transverse directions, the reinforcement shall be tied at a minimum every alternate intersection.

Where reinforcement spacing is less than 12 inches in either the longitudinal or transverse directions, the reinforcement shall be tied at a minimum, every third intersection.

The contractor may submit a request detailing an alternative tying plan for review and approval by the Engineer.

(608 PANEL, 06/19/25)

SECTION 608 SIGN PANELS:

608-1 Description: of the Standard Specifications is revised to read:

The work under this section shall consist of furnishing and installing sign panels in accordance with the details shown on the plans and the requirements set forth herein.

The sign panels shall be of the following types:

- (A) Extruded Aluminum Sign Panels with Direct-Applied, or Demountable Characters;
- (B) Flat Sheet Aluminum Sign Panels with Direct-Applied, Electronic-Cut, or Screen-Printed Characters;
- (C) Warning, Marker, and Regulatory Sign Panels;
- (D) Route Shields for Installation on Sign Panels; and/or
- (E) EXIT ONLY Panels for Installation on Sign Panels.

608-2.02 Extruded Aluminum Sign Panels with Direct-Applied, Digitally-Imaged, or Demountable Characters: the title and the third paragraph of the Standard Specifications are revised to read:

608-2.02 Extruded Aluminum Sign Panels with Direct-Applied or Demountable Characters:

The letters, numerals, symbols, borders and other features of the sign message shall be direct-applied, or demountable, and shall conform to the requirements of Subsection 608-2.08 or Subsection 608-2.09 of the specifications.

608-2.03 Flat Sheet Aluminum Sign Panels with Direct-Applied, Digitally Imaged, Electric-Cut or Screen-Printed Characters: the title and the fifth paragraph of the Standard Specifications are revised to read:

608-2.03 Flat Sheet Aluminum Sign Panels with Direct-Applied, Electronic-Cut, or Screen-Printed Characters:

Messages shall be reflectorized white or, if called for on the plans, opaque black, and shall be produced by either screen printing, direct-applying, or electronic cutting, as specified under Subsections 608-2.09 of the specifications.

608-2.05 Route Shields (For Installation on Sign Panels): the first paragraph of the Standard Specifications is revised to read:

Route shields may be demountable or direct-applied.

608-2.06 EXIT ONLY Panels (For Installation on Sign Panels): the first paragraph of the Standard Specifications is revised to read:

EXIT ONLY panels may be demountable or direct-applied. Demountable EXIT ONLY panels shall be attached to the sign panel with self-plugging aluminum blind rivets.

608-2.10 Digitally-Imaged Characters: the title and the text of the Standard Specifications are revised to read:

608-2.10 Digital Printing of Signs:

Digital printing of signs shall utilize a matched component system, including appropriate software and drivers in accordance with an APL certified retroreflective sheeting manufacturer's warranty requirements. Finished signs shall consist of a UV-protective clear overlay applied to the entire face of the sign. Any overlays shall also be compatible with the retroreflective sheeting manufacturer's matched component system and warranty. Digitally printed signs shall conform to the requirements of ASTM D4956 for daytime and nighttime requirements, as well as the requirements of the Department's Traffic Engineering Guidelines and Processes (TGP) 380 and Section 1007 of the specifications.

(701FLGSV, 03/20/25)

SECTION 701 MAINTENANCE AND PROTECTION OF TRAFFIC:

701-3.13 Flagging Services: of the Standard Specifications is revised to read:

Flagging services shall consist of 1) Department of Public Safety (DPS) officers with agency vehicles, 2) local enforcement officers with agency vehicles, 3) local enforcement officers without agency vehicles, and 4) civilian flaggers. Local enforcement officers and DPS officers include those who meet the requirements of a Peace Officer under ARS Title 38, generally including anyone certified by the Arizona Peace Officer and Training Board. If available, DPS officers shall be used on Interstate Highways and Urban Freeways. Local enforcement

officers will include uniformed officers from local police, tribal police, sheriff departments, or any other agencies that meet the requirements of a Peace Officer under ARS Title 38, generally including anyone certified by the Arizona Peace Officer and Training Board. An agency vehicle is defined as an agency-issued vehicle that meets the requirements of ARS Title 28. If local enforcement officers do not have access to an agency vehicle, a personal vehicle may be used, but it shall have a make and model similar in appearance of an agency vehicle, and shall be equipped with front and rear-facing red and blue lights. The personal vehicle, when applicable, shall be presented to the Engineer for acceptability prior to its use on the project by local enforcement officers. Approval of the personal vehicle will be at the sole discretion of the Engineer.

The contractor shall be responsible to procure DPS officers, local enforcement officers, and civilian flaggers. The Engineer will determine the types and the number of hours of flaggers as needed based on the project needs. Quantities shown on the traffic control plans and/or bidding schedule are approximate only and prepared for bidding purposes. When procuring DPS officers and local enforcement officers, the contractor shall contact the relevant agency at least two days, excluding weekends and holidays, before flagging services will be required. Such contact must be made between the hours of 7:00 A.M. and 5:00 P.M. (M.S.T.).

In the event that local enforcement officers or DPS officers are temporarily unable to provide flagging services, the contractor shall ensure that traffic control is maintained and all personnel are protected, either by providing civilian flaggers or through other means as approved by the Engineer. No adjustments to the contract will be allowed for any delays resulting from the unavailability of local enforcement officers or DPS officers.

Local enforcement and DPS officers shall not work more than 12 consecutive hour work shift without the permission of the State Construction Engineer unless an emergency situation exists which, in the opinion of the Engineer, requires that the officer remain in the capacity of a flagger.

The contractor shall furnish verification to the Engineer that all civilian flaggers have completed a recognized training and certification program. Flaggers certified by the American Traffic Safety Services Association (A.T.S.S.A.) or by the National Safety Council will be acceptable. Certification through other programs offering flagger training may be allowed upon by the State Construction Engineer's approval. Flagger certification must be current and updated at least once every four years.

701-6.07 Pilot Services, and Flagging Services: of the Standard Specifications is revised to read:

The accepted quantities of pilot vehicles, measured as provided above, will be paid for at the unit bid price for pilot vehicles with driver, which price shall be full compensation for the work, complete in place including, but not limited to, furnishing and maintaining the vehicle and furnishing the driver. Any hour worked after the eight hour regular time will be considered straight-time and will not be paid as overtime pay.

The accepted quantities of flagging services provided by the local enforcement officers (with agency vehicle), DPS officers, and civilian flaggers, measured as provided above, will be paid for at the contract unit price, which price shall be full compensation for the work, complete in

place, including the agency vehicle. Any hour worked after the eight hour regular time will be considered straight-time and will not be paid as overtime pay.

The accepted quantities of flagging services provided by the local enforcement officers without an agency vehicle, measured as provided above, will be paid for at the contract unit price, which price shall be full compensation for the work complete in place. Any hour worked after the eight hour regular time will be considered straight-time and will not be paid as overtime pay. No measurement or payment will be paid for the vehicle, regardless of the type of vehicle is an agency vehicle or not, the cost being considered as included in the price of the contract item.

In addition, the Department has estimated an additional two hours of travel time per officer per day in the quantities shown in the bid schedule. However, if more than two hours of travel time per day is required, such additional hours will be compensated in accordance with the requirements of Subsection 104.02 of the specifications if approved by the State Construction Engineer. Travel time is considered to be supplementary to the hours worked by the officer during a work shift.

(708 PTVCT, 07/17/25)

SECTION 708 WATERBORNE PAVEMENT MARKINGS:

708-2.01(D) Quantitative Requirements of Mixed Paints: the viscosity row of the Table 708-1 of the Standard Specifications is revised to read:

Table 708-1		
	White	Yellow
Viscosity: Krebs Units at $77 \pm 1^\circ$ F, ASTM D562	70 - 95	70 - 95

(709PGMNT, 08/18/22)

SECTION 709 DUAL COMPONENT PAVEMENT MARKINGS:

709-2.02(A) Composition: of the Standard Specifications is revised to read:

The epoxy resin material shall be within the following compositional requirements:

Component	Percent by Weight	
	White	Yellow
White Pigment (Titanium Dioxide)	18 - 25	10 - 17
Organic Yellow Pigment	---	7 - 10
Epoxy Resin	75 - 82	73 - 83

The white pigmented pavement marking material shall be tested in accordance with ASTM D3723 and shall conform to the requirements specified in ASTM D476 (Type II).

709-2.02(K) Color: of the Standard Specifications is revised to read:

The colors of the applied markings shall comply with the requirements specified in ASTM D6628 and shall conform to the following:

- (1) The white color shall match Federal Test Standard Number 595B, color chip no. 37875; and
- (2) The yellow color shall match Federal Test Standard Number 595B, color chip no. 33583.

709-2.02(L) Yellowness Index: of the Standard Specifications is revised to read:

The initial yellowness index value of the white material shall be tested in accordance with ASTM E313. The sample shall be cured for 72 hours at room temperature (75 ± 2 degrees F) prior to testing. The initial yellowness index shall not exceed a value of 8.

The yellowness index value of the white material shall be tested in accordance with ASTM E313 and ASTM G154. The sample shall be cured for 72 hours at room temperature (75 ± 2 degrees F) and then exposed in the QUV chamber for 72 hours and 500 hours respectively. The yellowness index values shall not exceed the values shown in the table below.

Exposure Time (hours)	Yellowness Index
72	15
500	27

(731STRSUP, 03/18/21)

SECTION 731 STRUCTURAL SUPPORTS AND FOUNDATIONS FOR TRAFFIC SIGNAL AND HIGHWAY LIGHTING:

731-1 Description: of the Standard Specifications is revised to read:

The work under this section shall consist of furnishing all materials and constructing new supports and foundations for traffic signal and highway lighting systems or modifying poles and mast arms of existing systems at the locations shown on the plans, and in accordance with the details shown on the plans and the requirements of these specifications.

Pole foundations shall include all conduits, elbows, anchor bolts, grounding wires and reinforcing steel. Cabinet foundations shall include conduits, elbows, anchor bolts and clearance pads.

731-2 **Materials:** of the Standard Specifications is revised to read:

Excavation and backfill shall conform to the requirements of Section 203-5.03 of the specifications. Concrete shall conform to the requirements of Sections 601 and 1006 of the specifications. Reinforcing steel and wire mesh shall conform to the requirements of Sections 605 and 1003 of the specifications.

Concrete for all foundations shall be Class S and shall have a required 28-day compressive strength of 3,500 pounds per square inch.

731-2.01 **BLANK:** the title and text of the Standard Specifications is revised to read:

731-2.01 **Aluminum Poles and Mast Arms:**

(A) **General:**

Standard aluminum poles assemblies for highway lighting shall include pole shafts, pole bases, and mast arms. Aluminum components of the pole, mast arm, base, and hardware shall conform to the details shown on the plans and in these specifications.

Each aluminum pole and mast arm shall be designed and manufactured as a complete assembly. The assembly shall be furnished and installed as a complete unit that is configured to the necessary dimensions with all the required components including mounting brackets and assembly, ground lugs, rain caps, hand hole covers, anchor bolts, nuts, washers and related hardware and accessories.

The design of the pole assembly (pole, mast arm, and luminaire attachment portion) shall be per the requirements of the 2013 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals, 6th edition with 2015 interim revisions. The design of the poles, mast arms and luminaire mounting brackets shall be based on a wind speed of 90 miles per hour with a luminaire having an effective projected area of 1.5 square feet and a weight of 55 pounds.

The design shall also be based upon the worst case loading, derived by combining the loads caused by a 20 foot truss mast arm, except for S and T poles, design luminaire, design wind speed and other dead loads, as appropriate. Secondary deflections shall be accounted for in all designs.

Aluminum poles shall have a minimum design life of 50 years.

The pole and mast arm shall be supplied from the same manufacturer and of similar metal properties providing a uniform appearance.

(B) **Pole and Mast Arm Assembly Design Parameters:**

(1) **Pole Shafts:**

The tapered pole shaft shall be fabricated from a one-piece, seamless, round tapered tube of Aluminum Alloy 6063-T6, conforming to the requirements of ASTM B221, and shall be full-

length heat treated after tapering and welding on the base and hand hole reinforcing to produce a T6 temper. The pole shafts shall either maintain a uniform taper rate from the base of the pole to the pole top or shall be non-tapered. The base plate shall be constructed to match the foundation bolt pattern for standard poles shown in the Standard Drawings for Aluminum Light Poles. No field splices of pole shafts shall be allowed. The pole shaft shall have an internal vibration damper.

The pole shaft shall be smooth with a uniform brushed sheen finish that is free from all dents, scratches, and shipping/handling marks. Poles that have a finish that is not uniform or that fails to meet the requirements of this specification will be rejected by the Engineer and shall be repaired or replaced to the satisfaction of the Engineer at no expense to the Department in accordance with Subsection 105 of the specifications.

All aluminum poles shall have a hand hole in the base of the poles and shall conform to the details shown on the Standard Drawings, with the exception that the hand hole shall use aluminum components and stainless steel screws.

An aluminum tag shall be permanently attached to the pole above the hand hole. The tag shall state the manufacturer's name, pole type, ADOT standard drawing number, pole length, and gage number.

(2) Truss Mast Arms:

The aluminum truss mast arms shall be fabricated by the same manufacturer as the aluminum pole manufacturer and from Aluminum Alloy 6063-T6 conforming to the requirements of ASTM B221.

The aluminum truss mast arms shall be smooth with a uniform brushed sheen finish that is free from all dents, scratches, and shipping/handling marks. Aluminum truss mast arms that have a finish that is not uniform or that fails to meet the requirements of this specification will be rejected by the Engineer and shall be repaired or replaced by the contractor to the satisfaction of the Engineer at no expense to the Department in accordance with Subsection 105 of the specifications.

(3) Welding:

Welding of all components of aluminum light poles shall conform to the American Welding Society (AWS) D1.2 Specifications for Class I Structures. All aluminum components and welding shall be identified and included in the Certificate of Analysis, which shall state compliance to AWS Specifications.

(4) Break-away Transformer Bases:

Break-away bases for light poles and flasher poles shall be a frangible pole mounting pedestal (base). Break-away bases shall be used on Type A, G, H, I, S, and T poles when indicated on the plans or specifications. Break-away bases shall be fabricated from 356 T6 aluminum alloys and shall have a stainless steel wheel abraded finish. The break-away bases shall have all the necessary hardware to make a complete and functional unit.

Bolts, nuts, and washers connecting the pole to the break-away base shall be fabricated from steel conforming to the requirements of ASTM F3125 Grade A325. Bolts shall be galvanized in accordance with the requirements of ASTM F2329. The 2-3/4 inch x 1/2-inch thick washers shall be zinc mechanically coated per ASTM B695-85 Class 50 or shall be galvanized per the requirements of ASTM F2329.

Welding of all components of aluminum break-away bases shall conform to the AWS D1.2 Specifications

Break-away bases shall be certified by the manufacturer to meet or exceed the change in momentum requirements of the AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals, and to be acceptable for use on Federal Aid projects. The manufacturer shall also certify that the break-away base has been tested and approved by the Federal Highway Administration (FHWA) and that the casting has the same chemistry, mechanical properties, and geometry as the casting used in the tests.

(5) Anchor Bolts, Nuts, and Washers:

All anchor bolts shall be fabricated from steel conforming to the requirements of ASTM F1554 Grade 55, shall be fully galvanized in accordance with the requirements of ASTM F2329, and shall conform to the requirements shown on the Standard Drawings. All anchor bolts shall be submitted for approval and a certificate of analysis shall be provided from the manufacturer that is in accordance with the requirements of Subsection 106.05 of the specifications.

(C) Submittals:

The contractor shall submit a Certificate of Analysis for all aluminum components in accordance with the requirements of Section 106.05 of the specifications. The contractor shall also submit shop drawings that have been sealed and signed by a registered professional engineer that show all the details of the poles assembly units to be furnished and installed. The shop drawings shall be complete in every aspect, including all dimensions, material specifications and appropriate details. The details shall include the configuration of the pole shaft, mast arm and mast arm mounting bracket, base plates, luminaire mounting bracket and the hand hole. All welds shall be shown and identified with standard AWS symbols. The submittal shall include structural calculations along with the name of the engineer(s) who sealed the drawings and performed the calculations.

The contractor shall submit the supporting documents for review by the Engineer. The principal purpose of the review is to verify that suitable structural calculations have been made in the design of the pole and mast arm assembly. The contractor's engineer shall utilize accepted standard engineering principles. If a computer program is utilized, the contractor shall furnish the Engineer with all necessary information, such as formulas and assumptions, to conduct a meaningful review.

The Engineer shall provide written review comments to the contractor. The contractor shall respond to these comments and resubmit the calculations, if required. Fabrication shall not take place until the shop drawings have been approved.

If the contractor utilizes a pre-approved design from ADOT's Approved Product List (APL), submittal of the structural calculations is not required. Shop drawings for APL designs shall be submitted. Drawing numbers for the pre-approved designs found in the APL are available at <https://azdot.gov/business/engineering-and-construction/product-evaluation-program>.

731-2.02 Standard Steel Poles: the title and text of the Standard Specifications is revised to read:

731-2.02 Steel Poles and Mast Arms:

(A) General:

Standard steel poles assemblies for traffic signals and highway lighting shall include pole shafts, mast arms, and pole bases. Steel components of the pole, mast arm, base, and hardware shall conform to the details shown on the plans and in these specifications.

Each steel pole and mast arm shall be designed and manufactured as a complete assembly. The assembly shall be furnished and installed as a complete unit that is configured to the necessary dimensions with all the required components including mounting brackets and assembly, ground lugs, rain caps, hand hole covers, anchor bolts, nuts, washers and related hardware and accessories.

The design of the traffic signal and lighting supports shall be per the requirements of the 2013 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals, 6th edition, with the 2015 interim revisions.

All pole lighting supports and mast arms shall be designed to withstand 90 miles per hour wind, and a 3-second Gust. Fatigue analysis is to be per Fatigue Category 2, without galloping. Truck Induced velocity shall be 55 mph wind speed.

Metal parts of standard steel poles and hardware shall conform to the details shown on the plans and the following specifications. Welding shall conform to the requirements of the American Welding Society, Structural Welding Code - Steel, D1.1, latest edition.

(B) Pole and Mast Arm Assembly Design Parameters:

(1) Poles Shafts:

Tapered pole shafts shall be fabricated from sheet steel of weldable grade which shall meet a minimum yield stress, after fabrication, of 50,000 pounds per square inch. A taper rate of approximately 0.14 inches in diameter per linear foot shall be required unless otherwise specified.

Standard pipe pole shafts shall be fabricated from standard weight structural steel which conforms to the minimum strength requirements of ASTM A53, or A500 Grade B. Each section shall be fabricated from not more than two pieces of sheet steel. When two pieces are used, the longitudinal welded seams shall be directly opposite one another. When the sections are butt-welded, seams shall be directly opposite one another. When the sections are butt-welded together, the longitudinal welded seams on adjacent sections shall be placed

to form continuous straight seams from base to top of pole. Pole shafts shall be straight, with a permissive variation not to exceed one inch measured at the midpoint.

Pole shafts shall be galvanized in accordance with the requirements of ASTM A123. The visual appearance of the galvanized finish shall be uniform. Discoloration of the galvanized finish such as dark areas, dark streaks, dark rings or transportation handling marks which are considered excessive by the Engineer shall not be allowed. Pole shafts that have a finish unacceptable to the Engineer shall either be repaired or replaced to the satisfaction of the Engineer at no additional cost to the Department.

All steel poles shall have a hand hole in the base of the poles and shall conform to the details shown on the Standard Drawings. All welds shall be continuous and any exposed welds, except fillet welds, shall be ground flush with the base metal.

A metal tag shall be permanently attached to the pole above the hand hole stating the manufacturer's name, pole type per the Department's plans, pole drawing number, shaft length and gage number.

(2) Mast Arms:

Tapered mast arms for all pole types shall be fabricated from sheet steel with a minimum yield stress of 50,000 pounds per square inch after fabrication. Mast arms shall be fabricated according to the thickness requirements shown on the plans.

A taper rate of approximately 0.14 inches change in diameter per linear foot shall be required unless otherwise specified. All bolts, washers, and nuts for mast arms shall be high strength, shall be fabricated from steel which meets the requirements of ASTM F3125 GR A325, and shall be electro-galvanized in accordance with the requirements of ASTM F2329.

Mast arms shall be galvanized in accordance with the requirements of ASTM A123. The visual appearance of the galvanized finish shall be uniform. Discoloration of the galvanized finish such as dark areas, dark streaks, dark rings or transportation handling marks which are considered excessive by the Engineer shall not be allowed. Mast arms that have a finish unacceptable to the Engineer shall either be repaired or replaced to the satisfaction of the Engineer at no additional cost to the Department.

A metal tag shall be permanently attached on the side of the mast arm near the base stating the manufacturer's name, pole type and name as shown on the plans, mast arm or pole drawing number, length, and gage number.

(3) Steel Pole Extensions and Twin Luminaire Brackets:

Pole extensions and twin luminaire brackets shall be fabricated from new pipe conforming to the requirements of ASTM A53 or A500 Grade B. All welding shall conform to the requirements of the American Welding Society, Structural Welding Code - Steel, D1.1, latest edition. Pole extensions and twin luminaire brackets shall be fully galvanized in accordance with the requirements of ASTM A123. Fabrication of the pole extensions and twin luminaire brackets shall be in accordance with the dimensions as specified in the plans.

(4) Standard Bases:

Poles shall have standard bases fabricated from structural steel plates conforming to the minimum strength requirements of ASTM A36. Exposed surfaces shall be finished smooth and all exposed edges shall be neatly rounded to a 1/8-inch radius. Standard bases shall be galvanized in accordance with the requirements of ASTM A123.

(5) Anchor Bolts, Nuts and Washers:

Standard anchor bolts, washers, and nuts shall be fabricated from steel conforming to the requirements of ASTM F1554 Grade 55. Anchor bolts, washers, and nuts shall be fully galvanized in accordance with the requirements of ASTM F2329. Anchor bolts shall conform to the requirements shown on Standard Drawings.

Welding shall not be performed on any portion of the body of these bolts. Certificates of Analysis conforming to the requirements of Subsection 106.05 of the specifications shall be submitted for high strength bolts, washers and nuts.

(C) Submittals:

The contractor shall submit a Certificate of Analysis for all steel components and welding in accordance with the requirements of Section 106.05 of the specifications. The contractor shall also submit shop drawings that have been sealed and signed by a registered professional engineer that show all the details of the poles assembly units to be furnished and installed. The shop drawings shall be complete in every aspect, including all dimensions, material specifications and appropriate details. The details shall include the configuration of the pole shaft, mast arm and mast arm mounting bracket, base plates, luminaire mounting bracket and the hand hole. All welds shall be shown and identified with standard AWS symbols. The submittal shall include structural calculations along with the name of the engineer(s) who sealed the drawings and performed the calculations.

The contractor shall submit the supporting documents for review by the Engineer. The principal purpose of the review is to verify that suitable structural calculations have been made in the design of the pole and mast arm assembly. The contractor's engineer shall utilize accepted standard engineering principles. If a computer program is utilized, the contractor shall furnish the Engineer with all necessary information, such as formulas and assumptions, to conduct a meaningful review.

The Engineer shall provide written review comments to the contractor. The contractor shall respond to these comments and resubmit the calculations, if required. Fabrication shall not take place until the shop drawings have been approved.

If the contractor utilizes a pre-approved design from ADOT's Approved Product List (APL), submittal of the structural calculations is not required. Shop drawings for APL designs shall be submitted. Drawing numbers for the pre-approved designs found in the APL are available at <https://azdot.gov/business/engineering-and-construction/product-evaluation-program>.

731-2.04 Mast Arms and Tie Rods: of the Standard Specifications is hereby deleted:

731-3.02 Foundations: the sixth paragraph of the Standard Specifications is revised to read:

Signal and lighting pole foundations shall be set flush with the existing or new curb and sidewalk or flush with the finished grade where there is no curb or sidewalk, except in sloped areas they shall be as shown on the plans. The dimensions and locations of foundations shall be as specified on the plans; however, the Engineer may direct that changes be made in locations due to obstructions or other existing conditions. The contractor shall verify top of foundation elevations with the Engineer prior to foundation construction.

731-3.02 Foundations: the tenth paragraph of the Standard Specifications is revised to read:

Anchor bolts and conduit stubs shall be placed and held in proper alignment, position, and height during the placing and vibrating of concrete. All pole foundations shall set for seven days prior to pole installation.

731-3.02 Foundations: of the Standard Specifications is modified to add:

The stations and offsets for traffic signal poles shown on the plans and in the pole/equipment schedule are approximate. The final location of each pole shall be staked in the field by the contractor and approved by the Engineer, to ensure that the edge of pole foundation is immediately adjacent (1-inch maximum) to the back of sidewalk, back of wheelchair ramp, or integrated into the sidewalk ramp design. The intent of these criteria is to ensure that the pedestrian push button assemblies are accessible to wheelchair-bound pedestrians.

ITEM 7320050 ELECTRICAL CONDUIT (2") (PVC):
ITEM 7320291 ELECTRICAL CONDUIT (2") (HDPE) (DIRECTIONAL DRILL):

Description:

This work under this items consists of furnishing and installing electrical conduits including excavation, backfill, compaction, installation of conduit, removal of spoil, warning tape, pull tape, connectors and fittings, and restoration of the surface to match the surrounding area as shown on the project plans and as specified herein.

Materials:

All Polyvinyl Chloride (PVC) Schedule 40 conduit shall conform to the requirements of Subsection 732-2.02 of the specifications.

All High Density Polyethylene (HDPE) conduit shall conform to the requirements as specified herein.

Unless otherwise shown on the plans, conduit bends, fittings, expansion couplings, sweeps, and other accessories shall be of the same material as the conduit.

(A) HDPE Conduit:

The contractor may propose substituting HDPE conduit which meets these specifications in place of direct-buried PVC conduit. The contractor shall obtain written approval from the Engineer prior to procuring and installing substituted HDPE conduit.

HDPE conduit and fittings shall comply with ASTM D 2241 and ASTM-F2160-01. HDPE conduit shall have a minimum rating of SDR 11. It shall have a cell classification of PE334470C (for black conduit) and PE334470E (for colored conduit) in accordance with ASTM 3350: Standard Specification for Polyethylene Pipe and Fittings Materials.

The polyethylene base resin shall meet the density requirement and melt index properties described herein. The density shall not be less than 0.940 and not more than 0.955 g/CM³ in accordance with ASTM D 1505: Standard Test Method for Density of Plastics by the Density-Gradient Technique. The range for the melt index shall be between 0.05 to 0.5g/10 minutes in accordance with ASTM D 1238: Standard Test Method for Melt Flow Rates of Thermoplastics by Extrusion Plastometer. The HDPE conduit shall have a minimum Flexural Modulus, of 80,000 psi, in accordance with ASTM D 790 and a minimum tensile strength at yield of 3,000 psi, in accordance with ASTM D-638.

Additives to the base resin shall be included to provide heat stabilization, oxidation prevention and ultraviolet (UV) protection. It shall utilize carbon black in the range of 2 to 3 percent for long term protection against UV degradation. The minimum protection period shall be one year from date of manufacture in unprotected, outdoor storage in accordance with ASTM D 1603: Standard Test Method for Carbon Black in Olefin Plastics.

The contractor shall provide the Engineer data sheets and a Certificate of Compliance letter from the HDPE conduit manufacturer stating that the product meets these requirements.

(B) Conduit Warning Tape:

Conduit warning tape shall be a minimum four-mil composite reinforced thermoplastic, with a minimum width of 3 inches and minimum length of 5 feet. Warning tape shall be highly resistant to alkalis, acids, and other destructive agents found in the soil.

Warning tape shall have a continuous printed message warning of the location of underground conduits. The message shall be in permanent ink specifically formulated for prolonged underground use and shall bear the words, "CAUTION - ELECTRIC LINE BURIED BELOW" in black letters on a red background for electric conduits or orange background for communication conduits.

(C) Detectable Pull Tape:

Detectable pull tape shall be constructed of fiber and have an embedded #22 AWG conductor. The tape shall be low-stretch and moisture-resistant. The tape shall have nominal pull

strength of 2,500 pounds. The tape shall include distance markings at intervals not to exceed 2 feet.

(D) Innerduct:

When called for in the project plans or Special Provisions, innerduct shall be smooth wall HDPE. The number of innerducts per conduit and sizes of innerduct shall be as called for in the project plans or as directed by the Engineer. Innerducts furnished and installed shall be of one color. Single mode fiber optic branch cable shall be installed in the $\frac{3}{4}$ " or 1" innerducts as shown in the project plans.

Construction Requirements:

All conduit, unless specified herein, shall be installed in accordance with the requirements of Subsection 732-3.01 of the specifications.

(A) Conduit Routing:

Conduit shown on the plans indicates the intended path and conduit shall be placed in accordance with the lines, grades, details, and dimensions shown on the project plans and specifications, unless otherwise approved by the Engineer. The conduit path shall be staked for review and approval of the Engineer three working days prior to installation or excavation. The conduit path shall be modified as necessary, with the approval or at the direction of the Engineer, to avoid obstacles and obstructions, to facilitate future maintenance, or to conform to appropriate codes and specifications. Final conduit locations shall be documented in the record drawings.

Excavations shall not be left open over 48 hours unless a plan has been submitted and approved by the Engineer to allow for open excavation. Safety devices used for the protection of excavations will not be considered as traffic control items.

(B) Conduit Size:

Changes in the size of the conduit shall be submitted to the Engineer for approval prior to construction. Changes in conduit size shall be documented in the record drawings.

(C) Conduit Bend Radius and Deflection:

Except for factory bends, conduit bends shall have a radius of not less than that specified in the NEC. Conduit shall be bent without crimping or flattening, using the longest radius practicable. Communications conduits shall not deflect more than 1 inch per foot (1:12) vertically or horizontally. This is equivalent to a minimum radius of 6 feet. If the 1:12 requirement cannot be achieved, standard factory-made elbows of 11 1/4, 22 1/2, 30 or 45 degrees shall be used if approved by the Engineer. If 90-degree cumulative turns are required, they shall be made of individual elbows with a minimum radius of 36 inches for new or future fiber optic cable.

(D) Conduit Fittings:

New runs of HDPE conduit shall be continuous from pull box to pull box. HDPE conduit shall not be joined to PVC conduit in the length of the run.

If joining segments of HDPE conduit is called for on the plans or required by the Engineer, the contractor shall utilize non-corrosive, sit-tight, water-tight couplings. Heat fusion, electrofusion fittings and mechanical connections will be permitted if the HDPE conduit and joining device manufacturer's recommendations are followed and the internal diameter of the HDPE conduit is not reduced. Extrusion welding and hot gas welding to join HDPE conduits is not permitted.

Upon completion of joining HDPE conduit sections and setting the pull boxes, the contractor shall clean the HDPE conduit with compressed air. The contractor shall demonstrate that the conduit was not deformed during installation by pulling a cleaning mandrel or ball mandrel with a diameter of 80 percent of the HDPE inside diameter. If the mandrel passes through the HDPE, the contractor shall install the pull tape in accordance with Section 732. If the mandrel encounters a deformity in the HDPE conduit, the contractor shall replace the entire segment of HDPE between pull boxes with new HDPE at no cost to the Department.

(E) Conduit Depth:

Lighting conduits shall have a minimum cover depth of 36 inches. Backfill compaction shall be in accordance with Subsection 203-5.03(B)(4). When conduit cannot be installed at the required minimum depths, it shall be encased in Class B concrete, in accordance with Section 1006. The cost of the encasement shall be included in the price of the conduit.

(F) Conduit in Trenches:

Immediately after conduit work including, installation, mandrelling or cable or pull tape installations, the conduits shall be sealed to prevent the intrusion of water, mud, gravel, vermin, etc. Taping the ends of the conduit is not allowed.

Unoccupied conduits on which work is performed shall be sealed with a water-tight, corrosion-proof, removable, reusable, and vermin resistant conduit plug or cap.

Occupied conduits on which work is performed shall be sealed with a conduit cap, as approved by the Engineer. The conduit cap shall be water-tight, corrosion-proof, removable, and vermin resistant.

A 3 inch "Y" shall be cut into the face of the curb directly over conduit located under rolled or vertical curbs.

The contractor shall place warning tape in trenches in which new PVC or trenched HDPE conduit is placed. Warning tape is not required in conduit segments where trenchless methods are used for installation. Warning tape shall be buried at a depth of 6 to 8 inches below the finished grade. No compensation will be provided to restore landscape or add decomposed granite of disturbed areas.

(G) Conduit by Trenchless Methods:

New conduit to be installed under existing pavement, curbs and gutters, sidewalks, established landscaping or decomposed granite not otherwise impacted by construction, and at other locations specifically indicated on the project plans, shall be installed by Horizontal Directional Boring (HDB) or Horizontal Directional Drilling (HDD) methods. Use of either method is allowed, subject to approval of the Engineer.

Conduit installation in areas where trenching would typically be allowed may be completed by trenchless methods, if approved in advance by the Engineer as a means of facilitating installation or mitigating potential damage to existing surface and subsurface elements. If approved by the Engineer, the use of trenchless methods shall be at no additional cost to the Department.

Prior to beginning trenchless installation methods, the contractor shall complete the necessary potholing, and submit the proposed profile to the Engineer for approval. Installation shall be performed in accordance with industry standards and as directed by the Engineer.

The contractor's installation process shall utilize the "walkover" locating system or other Engineer approved equivalent, for determining the installation profile. The installation equipment shall register the depth, angle, rotation and directional data. At the surface, equipment shall be used to gather the data and relay the information to the equipment operator.

Excavation and backfill of excavated pits shall be in accordance with the requirements of Subsection 203-5.03(A) and (B).

When enlargement of an installation hole is necessary, the hole shall be at least 25 percent larger than the conduit to be installed, unless otherwise specified by the Engineer. Pulling equipment such as grips, pulling eyes, and other attachment hardware external to the conduit will be permitted as long as a wooden dowel is placed inside the conduit to prevent it from collapsing at the point of attachment when pull tension is at its peak. A swivel shall be used with pulling hardware when pulling back the conduit into the installation path. Drilling fluid shall be pumped down the hole to provide lubrication for the conduit as it is pulled in. The pulling tension for installing conduit into the installation path shall not exceed 75 percent of the conduit manufacturer's tensile strength rating in order to prevent the conduit from "necking down" or deforming.

Final installation profiles shall be submitted to the Engineer.

(H) Detectable Pull Tape:

The contractor shall install detectable pull tape in new and existing empty conduits and innerducts. Detectable pull tape in conduits shall terminate at the end of the conduit with a minimum of 2 feet of coiled slack in the pull box. Detectable pull tape traveling through conduit that terminates in a pull box, shall have its wire ends connected together to allow for a continuous locating signal to be used for the entire conduit run.

(I) Conduit Cleaning:

The contractor shall clean existing conduit, no more than one week prior to installation of cables or conductors. For PVC conduit, a metal-disc mandrel with an outer diameter not less than 90 percent of the inside conduit diameter shall be pulled through the conduit. For HDPE conduit, a ball mandrel with an outer diameter not less than 80 percent of the inside conduit diameter shall be pulled through the conduit. Prior to pulling the mandrel through the conduit, the conduit shall be brushed or swabbed if required by the Engineer.

(J) Conduit Entering Pull Boxes:

Conduit entering pull boxes shall be installed in accordance with the details shown on the project plans. Conduit ends shall be capped with conduit end cap or plug fittings until wiring or cabling is installed. When end caps or plugs are removed, the contractor shall install bell end fittings or approved bell end shape integral to the conduit. Bell ends shall be installed prior to the installation of the conductors or cables. Approved insulated grounding bushings shall be used on steel conduit ends.

(K) Cathodic Protection:

Prior to trenching, the contractor shall verify the existence of cathodic protection in existing utilities and take all possible precautions to maintain existing cathodic protection.

Method of Measurement:

Electrical Conduit will be measured by the linear foot for each diameter size from center to center of pull boxes or, from center of pull box to edge of foundation or, from edge to edge of cabinet foundation or, from end of conduit to center of pull box or foundation or, from end to end of conduit when no pull boxes are used.

Basis of Payment:

The accepted quantities of Conduit, measured as provided above, will be paid for at the contract unit price per linear foot, which price shall be full compensation for the work, complete in place. The contract unit price includes warning tape, excavation, backfill, detectable pull tape, connectors, fittings, potholing of utilities, removal of spoil, compaction of trenches and directional drilling/boring pits, restoration of the surface to existing condition, including concrete, pavement, decomposed granite and other landscaping items where appropriate, repairing irrigation facilities, locating existing conduit when new is to be intercepted with existing, and other items necessary to complete the work.

No measurement of direct payment will be made for:

- (1) Cleaning out existing conduit, or for disconnecting, removing, reinstalling, and reconnecting existing cables or conductors within existing conduit where new cable or conductors are installed.
- (2) Vertical distances of conduit below the ground.

- (3) Distances of conduit runs installed, but not used.
- (4) Innerduct that is installed only within the confines of a pull box.
- (5) Slack or coiled cable.
- (6) Conduit bends, expansion couplings, junction boxes, mounting hardware, and fittings.

The cost being considered as included in the contract price for this item of work.

ITEM 7320460 PULL BOX (NO. 4B):

Description:

The work under this item shall consist of furnishing and installing pull boxes for roadway lighting elements in accordance with Section 732 of the specifications, the ADOT Standard Drawings, the project plans and as specified herein.

Materials:

All new lighting pull boxes shall be Type 4b pull boxes as specified on the project plans and in accordance with ADOT Standard Drawing Number T.S. 1-12.

Polymer concrete fiberglass reinforced pull boxes, lids and extensions shall be installed and located as shown on the project plans and shall be the size specified. Concrete pull boxes, lids and extensions shall not be used.

Portland cement concrete for No. 4b pull boxes shall conform to Section 1006 of the specifications for 3,000 psi Class S concrete.

Pull box lids not associated with the urban freeway management systems shall bear the words "ADOT ELECTRICAL HIGH VOLTAGE". Markings shall be clearly defined, uniform in depth and placed parallel to the long side of the cover. Letters shall be one inch high.

Pull box lids shall have a locking mechanism approved by the Engineer.

The contractor shall provide a Certificate of Compliance that the pull boxes furnished and installed are in conformance with the specifications.

The following polymer concrete fiberglass reinforced pull box manufacturers, or approved equal may be used:

Christy Concrete Products
5435 W. Mohave Street
Phoenix, AZ 85043

Carson Industries
1160 Nicole Ct.

Glendora, CA 91740

Quazite
50 S. Semmons, Suite 330
Lewisville, TX 75067

Construction Requirements:

The contractor shall be responsible for restoring the surrounding surface conditions back to their original state, including concreted areas.

The contractor shall contact Steven J. Koebler at 480-589-8250 prior to ordering boxes to determine the pattern used for the security bolts and locking/unlocking tools.

The compaction around the box shall not damage the pull box. The contractor shall replace pull boxes damaged by compaction at no cost to the Department.

Method of Measurement:

Pull Box (No. 4B) will be measured on a per each basis.

Basis of Payment:

The accepted quantities of Pull Box (No. 4B), measured as provided above, will be paid for at the contract unit price per each, complete in place, including ground rods, grounding conductors, grounding lugs, excavating, backfilling, surface restoration, conduit adjustment, and removal of existing pull boxes, brick, and stone sump, necessary to complete the work.

ITEM 7360104 LUMINAIRE (HORIZONTAL MOUNT) (15L) (LED):

Description:

The work under these items shall consist of furnishing all equipment, materials and labor necessary to install horizontal mount light emitting diode (LED) luminaires in accordance with the project plans and as specified herein.

Materials:

(A) General:

Luminaires shall conform to the requirements of Subsection 736-2.05 of the specifications.

All horizontal mount LED luminaires supplied on this project shall be 240-volt fixtures with a 3,000K correlated color temperature, shall be supplied with a shorting cap and shall be listed on ADOT's Approved Products List. The following LED luminaires have been approved for use on this project and meet the photometric requirements:

(B) Type 15L:

- Acuity Brands Lighting ACM P606 R3 3K with 13,263 lumens at 94 watts
- General Electric ERL1_14B350 with 13,400 lumens at 110 watts
- Philips Lumec RFM-108W48LED3KGS R3M with 12,049 lumens at 106 watts

Construction Requirements:

The luminaire shop drawings and submittals shall be in accordance with Subsection 105.03 of the specifications.

The LED luminaire shall be installed in accordance with Subsection 736-3 of the specifications.

The contractor shall test all luminaires in accordance with Subsection 732-3.02(D)(2) of the specifications.

Method of Measurement:

Luminaire (Horizontal Mount) (15L) (LED) will be measured on a per each basis.

Basis of Payment:

The accepted quantities of Luminaire (Horizontal Mount) (15L), measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place.

ITEM 7360236 LOAD CENTER CABINET (LIGHTING) (MODIFY):

Description:

The work under this item shall consist of furnishing new circuit breakers, removing electrical conductors and installing new electrical conductors into circuit breakers and providing all materials, tools, equipment, and labor necessary to modify the existing lighting load center cabinet at the location as shown on the project plans and as specified herein.

Materials:

All materials for the modification of the load center cabinet shall conform to the requirements of Subsections 732-2 and 736-2.07 of the specifications.

Switches, breakers, and other components shall have openings to operate from the front panel.

Construction Requirements:

The contractor shall modify the load center cabinet as specified on the lighting plans and in accordance with Subsections 732-3, 737-3.01 and 737-3.03 of the specifications.

Method of Measurement:

Load Center Cabinet (Lighting) (Modify) will be measured on a per each basis.

Basis of Payment:

The accepted quantities of Load Center Cabinet (Lighting) (Modify), measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work described and specified herein and on the plans to provide a complete, functional, modified load center cabinet, complete in place.

ITEM 8050003 SEEDING (CLASS II):

The work under this item shall consist of furnishing all materials, preparing the soil, applying Class II seed, establishing, and maintaining the seeded areas along with final mulch cover.

Areas to be seeded are those disturbed or unvegetated areas listed herein, shown on the plans, called for in the contractor's erosion/sediment control plan, Nonpoint Source (NPS) pollution control plan, Stormwater Quality Protection Plan (SQPP), Stormwater Runoff Pollution Control Plan, Decentralized Stormwater Management Plan, Stormwater Runoff Mitigation Plan, Stormwater Management Plan (SWMP), Biotechnical Erosion Control Plan, Post-Construction Stormwater Management Plan (PCSMP), Integrated Vegetation Management Plan (IVMP), Functional Landscape Ecological Restoration Plan, Assisted Migration Plan (AMP), or designated by the Engineer. All construction support activities disturbed unpaved temporary construction access, unpaved on-site staging, unpaved on-site material storage, and unpaved on-site stockpiling areas shall ultimately be seeded unless otherwise stabilized by equivalent permanent stabilization measures. If not seeded, the equivalent permanent stabilization measures shall be evaluated by a Construction Professional Landscape Architect (PLA) and approved by the Engineer. Unless otherwise prohibited by environmental permit, seeding is required to stabilize the unpaved disturbed dry area within the Waters of the U.S. Seeding area below the Ordinary High-Water Mark (OHWM) shall exclude any definable low flow channel(s). The seeding area below the OHWM shall also exclude the area directly under bridge(s).

Seeding may be included as part of a landscape project as specified in Section 807 or used for erosion control as part of a Storm Water Pollution Prevention Plan (SWPPP) as specified in Subsection 104.09 of the specifications, or both.

In either case, seeding shall be accomplished in two (2) stages. The first stage shall consist of tillage; furnishing and applying compost, chemical fertilizer, and sulfur; furnishing and planting the contract-specified seed mix; and furnishing, applying and affixing final mulch cover. The second stage, beginning after the first stage has been accepted by the Engineer, shall be a 45-calendar-day period during which time the contractor shall be responsible for maintaining and stabilizing the seeded and mulched areas, and restoring damaged or eroded areas.

Seeding construction shall be completed before Substantial Completion. The 45-calendar-day seeding maintenance period, including any re-seeding work if required after Initial Seeding Construction Acceptance, shall be completed before project Final Acceptance.

Seeding used as part of a SWPPP shall be completed before Substantial Completion, or sooner as required in the SWPPP. The 45-calendar-day seeding maintenance period, including any re-seeding work if required after Initial Seeding Construction Acceptance, shall be completed before project Final Acceptance.

No time extension will be granted for seeding not completed as specified herein.

Seeding areas below the OHWM shall be exempted from the 45-calendar-day maintenance period requirement.

An on-site pre-activity seeding construction meeting shall be coordinated by Construction PLA. The necessity of half-acre (0.5 acre) sample demonstrative area of Class II Seeding shall be verified for the seeded areas greater than five (> 5) acres excluding shoulder build-up areas (edge of pavement build-up areas). The contractor shall guarantee in writing to furnish all suitable equipment for soil tillage, seeding, and mulching during pre-activity seeding construction meeting as evaluated by a Construction PLA, as well as approved by the Engineer.

2.0 Materials:

2.01 General:

The contractor shall avoid persistent herbicide residues contamination in the soil. Soil sterilant herbicides, especially bare-ground herbicides with long-lasting Soil Persistence, shall be prohibited to use for all unpaved project areas that will be seeded. Pre-emergence herbicides shall be prohibited from unpaved project areas that will eventually be seeded.

Appropriate documentation, as specified below, shall be submitted to the Engineer a minimum of 30 calendar days before the start of a scheduled seeding activity. No materials shall be delivered to the site until the documentation has been approved by the Engineer.

Unless otherwise specified, Certificates of Compliance conforming to the requirements of Subsection 106.05 of the specifications shall be provided for all materials.

The contractor shall also provide tests from accredited laboratories for all materials, as specified herein. Should the contractor perform its own testing, such test results shall also be provided to the Engineer.

2.02 Seed:

(A) General Requirements:

The species, variety, and strain of seed (designated elsewhere herein as contract-specified seed) shall be as shown on the plans or as specified herein. The contract-specified seed shall

be obtained from seed suppliers through harvesting of wildland collections, or field-grown seeds grown prior to or during the contract period.

A Certificate of Analysis for each seed species shall be furnished to the Engineer at least four (4) weeks prior to the seeding construction. No seed shall be furnished to, or delivered to, the project until approved by the Engineer and Roadside Development. The Certificates of Analysis shall contain the following information for each seed sample: the test results of the Fifty States Noxious Weed list, all seeds including weed seeds listed, purity and germination, tetrazolium test results, when used and any pathology found to be present. The sample testing, when available for the native plant species, shall use the rules for testing seeds published by the "Association of Official Seed Analysts" or the "Society of Commercial Seed Technologists."

If the samples indicate species listed as noxious, restricted, or invasive, the lot will be rejected or evaluated for use on the project. The list of noxious, restricted, or invasive species is located at Roadside Development and linked to the following website:

<http://www.azdot.gov/business/engineering-and-construction/roadway-engineering/roadside-development>

Within 30 calendar days after the award of contract, the contractor shall submit the name of the seeding subcontractor to be used, along with written confirmation from seed suppliers and/or collectors, on their letterhead, that the source(s) for the contract-specified seed has been secured. A minimum of three (3) separate confirmation letters from seed suppliers, providers, and/or collectors shall be presented through the Engineer for a Construction PLA's evaluation within the context of reliable sources. If any of the contract-specified seed is expected to be unavailable prior to the time specified for seeding, in accordance with Subsection 2.02(B) below, the contractor shall notify the Engineer at this same time.

The seed shall be delivered to the project site unmixed in standard, sealed, undamaged containers for each seed species. Each container shall be labeled in accordance with the appropriate provisions of the Arizona Revised Statutes and the U.S. Department of Agriculture rules and regulations under the Federal Seed Act. Labels shall indicate the scientific genus, species, subspecies/varieties or strains of seed, the percentage of germination, purity, weed content, and testing information. Unless otherwise approved by Roadside Development Section through the Engineer, the date of analysis for Tetrazolium Test (TZ) shall not be more than 15 months prior to the delivery date from a seed provider/supplier. A Certificate of Analysis from an accredited seed-testing laboratory, and conforming to Subsection 106.05 of the specifications, shall accompany each container of seed.

Unless otherwise approved by Roadside Development through the Engineer, weed content of the contract-specified seed mix shall not exceed 0.5 percent ($\leq 0.5\%$).

In addition to Federal Seed Act Regulations, unless otherwise approved by Roadside Development through the Engineer, the contamination of seed lots from the following noxious /invasive plant species shall not be permitted.

NOXIOUS / INVASIVE WEEDS WATCH LIST FOR THE CONTAMINATED SEED LOTS	
SCIENTIFIC NAME	COMMON NAME
<i>Amaranthus retroflexus</i>	Redroot Amaranth / Redroot Pigweed / Red-Rooted Pigweed / Rough Pigweed
<i>Bassia scoparia</i> (syn. <i>Kochia scoparia</i>)	Kochia / Fireweed
<i>Bothriochloa bladhii</i> (syn. <i>Andropogon bladhii</i> / <i>Andropogon caucasicus</i> / <i>Andropogon intermedius</i> / <i>Bothriochloa caucasica</i> / <i>Bothriochloa intermedia</i>)	Caucasian Bluestem
<i>Bothriochloa ischaemum</i>	Yellow Bluestem
<i>Brassica tournefortii</i>	Sahara Mustard / Mediterranean Mustard / Mediterranean Turnip / Prickly Turnip
<i>Bromus tectorum</i>	Cheatgrass / Downy Brome / Broncograss / Downy Chess / Soft Chess / Drooping Brome
<i>Cynodon dactylon</i> (syn. <i>Capriola dactylon</i>)	Bermudagrass / Devilgrass
<i>Centaurea melitensis</i>	Malta Star-thistle / Napa Star Thistle / Tocalote
<i>Cenchrus spinifex</i> (syn. <i>Cenchrus incertus</i> / <i>Cenchrus pauciflorus</i> / <i>Cenchrus parviceps</i>)	Field Sandbur / Coastal Sandbur / Common Sandbur
<i>Chorispora tenella</i>	Crossflower / Purple Mustard / Blue Mustard / Musk Mustard / Beanpodded Mustard / Tenella Mustard
<i>Cuscuta</i> spp.	Dodder / Angel Hair / Devil's Hair / Devil's Ringlet / Goldthread / Hairweed / Lady's Laces / Strangleweed / Witch's Hair / Amarbel
<i>Eragrostis lehmanniana</i>	Lehmann Lovegrass
<i>Euphorbia esula</i>	Leafy Spurge / Green Spurge / Wolf's Milk
<i>Euphorbia prostrata</i> (syn. <i>Chamaesyce prostrata</i> / <i>Euphorbia chamaesyce</i>)	Prostrate Spurge / Prostrate Sandmat / Ground Spurge / Blue Weed
<i>Onopordum acanthium</i>	Scotch Thistle / Cotton Thistle
<i>Pennisetum ciliare</i> (syn. <i>Cenchrus ciliaris</i>)	Buffelgrass / African Foxtail Grass
<i>Physalis</i> spp.	Ground Cherry / Jerusalem Cherry / Strawberry Tomato
<i>Salsola kali</i> subsp. <i>tragus</i> (syn. <i>Salsola iberica</i>)	Russian Thistle / Tumbleweed
<i>Setaria faberi</i>	Japanese Bristlegrass / Giant Foxtail
<i>Setaria pumila</i> (syn. <i>Chaetochloa glauca</i> / <i>Chaetochloa lutescens</i> / <i>Panicum glaucum</i> / <i>Setaria glauca</i>)	Yellow Foxtail / Pigeon Grass / Yellow Bristlegrass
<i>Setaria viridis</i>	Green Bristlegrass / Pigeon Grass / Wild Millet / Green Foxtail

NOXIOUS / INVASIVE WEEDS WATCH LIST FOR THE CONTAMINATED SEED LOTS	
SCIENTIFIC NAME	COMMON NAME
<i>Solanum physalifolium</i> (syn. <i>Solanum physalifolium</i> / <i>Solanum sarachoides</i> / <i>Solanum villosum</i>)	Hoe Nightshade / Argentine Nightshade / Green Nightshade / Hairy Nightshade

The contractor shall provide all seed tag labels to the Engineer. No payment will be made for seeds until tag labels and Certificates of Analysis from all seeds to be used on the project have been submitted as specified.

Both the contractor and the seed supplier shall store seed under dry conditions, at temperatures of between 35 °F and 120 °F, and out of direct sunlight. Prior to using the seed, the contractor, as well as seed supplier, shall both provide a certification letter to the Engineer verifying that the seed was stored as specified herein.

Legume seed shall be inoculated with appropriate bacteria cultures approved by the Engineer, in accordance with the culture manufacturer's instructions.

Tetrazolium staining shall be acceptable to test for germination and hard seed. Cut or fill testing will not be allowed. As directed by the Engineer, seeds with an expiration date past the acceptable test date or not meeting the specified conditions for storage shall be retested by the contractor. The Engineer may perform random sampling of seeds throughout the project. Mixing of the specified seed at the project site shall be under the supervision of the Engineer.

Application rates of seed as specified are for Pure Live Seed (PLS). PLS is determined by multiplying the sum of the percent germination of seeds, including hard or dormant seeds, by the percent purity.

Diversified seed mix species and the PLS rates are shown in Table 1 below:

TABLE 1			
DIVERSIFIED SEED MIX—for All Unpaved Disturbed Areas, Unvegetated Areas, Receiving Pervious Areas (RPA), Decentralized Stormwater Management Areas, and/or Designated Areas			
Botanical Name	Common Name	PLS Rate (Pounds Per Acre)	Per Pound Value for Substitution (see text)
Aristida purpurea	Purple Threeawn	2	\$40
Aster tanacetifolius	Purple Prairie Aster	1	\$45
Asclepias tuberosa	Butterfly Milkweed	1	\$300
Bothriochloa barbinodis	Cane Beardgrass	1	\$50
Bouteloua curtipendula cv. Vaughn *	Sideoats Grama	1	\$20

Bouteloua gracilis cv. Hachita	Blue Grama	1	\$15
Baileya multiradiata	Desert Marigold	2	\$80
Bouteloua rothrockii	Rothrock Grama	0.5	\$56
Coreopsis tinctoria	Plains Coreopsis	2	\$20
Digitaria californica	Arizona Cottontop	0.5	\$50
Dalea purpurea	Violet Prairie Clover	3	\$50
Distichlis stricta (syn. Distichlis spicata)	Desert Saltgrass	1	\$65
Encelia farinosa	Inciense Brittlebush	4	\$40
Encelia frutescens	Button Brittlebush	1	\$35
Gaillardia aristata	Blanket Flower	3	\$20
Gaillardia pulchella	Firewheel	0.5	\$20
Hilaria berlandieri	Curly Mesquitegrass	3	\$55
Lesquerella gordonii	Gordon's Bladderpod	1	\$40
Lupinus bicolor	Miniature Lupine	3	\$65
Lupinus sparsiflorus	Desert Lupine	1	\$90
Lupinus succulentus	Arroyo Lupine	3	\$30
Nassella pulchra (syn. Stipa pulchra)	Purple Needlegrass	3	\$90
Oryzopsis hymenoides (syn. Achnatherum hymenoides)	Indian Ricegrass	3	\$10
Psilostrophe cooperi	Paper Flower	0.5	\$100
Penstemon parryi	Parry's Beardtongue	2	\$90
Pascopyrum smithii	Western Wheatgrass	2	\$15
Senna covesii	Coues' Cassia	3	\$50
Sporobolus airoides	Alkali Sacaton	0.3	\$30
Sporobolus cryptandrus	Sand Dropseed	0.1	\$10
Setaria macrostachya	Plains Bristlegrass	1	\$25
Zinnia acerosa	Dwarf White Zinnia	1	\$150
Estimated Per Acre Subtotal Value for Seeds Only			\$2,718.00

* Niner may be furnished if Vaughn is determined by Roadside Development as unavailable from seed sources.

(B) Seed Substitution:

No substitution of the contract-specified seed will be allowed unless evidence is submitted documenting that the contractor has made a diligent effort to obtain the contract-specified seed from either seed suppliers or collectors, and that the contract-specified seed will not become available prior to the time specified for seeding in the contractor's approved construction schedule.

The contractor may also request a substitution if the lowest price available for the contract-specified seed is greater than two (2.0) times the value shown in Table 1. The contractor shall provide documentation from a minimum of three (3) seed suppliers or collectors supporting such a request. Documentation shall include copies of the invoices from each supplier or collector. Only those invoices obtained within three (3) weeks of the time specified for seeding in the contractor's approved construction schedule will be acceptable.

Should a substitution of the contract-specified seed be requested for one of the two (2) reasons specified above, and the contractor's documentation is approved by the Engineer, the Department's Roadside Development Section will specify an alternate seed within five (5) working days of the Engineer's approval of the contractor's documentation. The alternate seed will only be allowed when there is an insufficient quantity of the contract-specified seed, as determined in the previous two (2) paragraphs, for the areas to be seeded as called for herein or as required for erosion control. The contractor shall obtain and apply the alternate seed, as required, to all such remaining areas. Unless otherwise approved by the Engineer, the approved alternate seed will only be allowed until such time that contract-specified seed meeting the availability and price requirements specified herein can be provided.

For each pound of contract-specified seed not provided by the contractor, the value indicated in Table 1 will be deducted from the contract amount. The price per pound for the alternate seed selected by the Department, as specified above, will be determined in accordance with Subsection 109.04(D)(2) of the specifications. No additional adjustments will be made for substituting the alternate seed, the costs being considered as included in the contract item for seeding.

No payment will be made for areas seeded with unapproved seed. No payment will be made for areas seeded until the entire approved seed mix (including all authorized seed substitutions/adjustments) is executed.

2.03 Tacking Agent:

Tacking agent shall be a naturally occurring organic compound and shall be non-toxic. The tacking agent shall be a product typically used for binding soil and mulch in seeding or erosion control operations. Approved types shall consist of mucilage or gum by dry weight as active ingredient obtained from guar or plantago. The tacking agent shall be labeled indicating the type and mucilage purity.

The contractor shall have the tacking agent swell volume tested by an approved testing laboratory using the USP method. The standard swell volume shall be considered as 30 milliliters per gram. Material shall have a swell volume of at least 24 milliliters per gram. Certified laboratory test results for homogenous consistency shall be furnished to the Engineer for each shipment of tacking agent to be used on project areas. Tacking agent rates shall be adjusted to compensate for swell volume variation. Material tested with lesser swell volume shall have the tacking agent rate increased by the same percentage of decrease in swell volume from the standard 30 milliliters per gram. Material tested with greater volume may reduce tacking agent rates by the same percentage of increase in swell volume from the standard 30 milliliters per gram. Tacking agent shall be pure material without starches, bentonite, or other compounds that would alter the swell volume test results of mucilage, or the effectiveness of the tacking.

2.04 Thermally-Refined Wood Fiber:

Wood cellulose fiber mulch shall conform to the requirements of Subsection 805-2.03 of the specifications, except as modified herein, and shall be from thermo-mechanically processed wood, processed to contain no growth germination inhibiting factors. The mulch shall be from virgin wood, manufactured and processed so the fibers will remain in uniform suspension in water under agitation to form homogenous slurry. Paper products will not be considered as virgin wood. The thermally-refined wood fiber mulch shall have the properties shown in Table 2 below:

TABLE 2	
Virgin Wood Cellulose Fiber	90% min.
Recycled Cellulose Fiber	10% max.
Ash Content	0.8% +/-0.3%
pH	4.5 +/-1.0
Water Holding Capacity	10 : 1 (water : fiber) Min.

2.05 Weed Free Straw Mulch:

(A) General:

Straw mulch including barley straw shall conform to the requirements of Subsection 805-2.03 of the specifications, except as modified herein, and shall be from the current season's crop. A letter of certification from the supplier shall be required stating that the straw was baled less than twelve (12) months from the delivery date. Additionally, a bill of sale for straw material shall be presented for a Construction PLA's evaluation within context from reliable sources through the Engineer.

All straw, including hydraulically applied straw, shall be free from noxious weeds in compliance with the standards and procedures of the North American Weed Management Association (NAWMA) or the Arizona Crop Improvement Association (ACIA). The contractor shall provide documentation, including a transit certificate, and appropriate labels and/or marking twine, from the ACIA or NAWMA that straw materials to be used for mulch are free of noxious weeds. The straw shall be accompanied by the certification, labels and/or marking twine at the time of delivery to the project site. Straw delivered to the project without such information will be rejected and promptly removed from the project.

Rye straw and oat straw will not be acceptable.

(B) Weed Free Straw Mulch for Hydraulic Application:

Hydraulically applied straw mulch shall be wheat, barley, or rice straw processed into various particle sizes, mixed with water and tacking material, and applied as a non-clogging slurry using a hydroseeder. A minimum of 70 percent (70%) of wheat, barley, or rice straw in the mix shall be not less than 1/2 inch $\pm$ 1/4 inch in length. Straw particles may be longer provided that the particles can be used with the selected hydroseeder without clogging. Hydraulically applied straw mulch, as furnished by the manufacturer, may contain up to ten (10) percent paper or cotton materials in dry weight. Hydraulically applied straw mulch shall also contain

20 percent (20%) of wood fiber in dry weight. The combined dry weight percentage of paper, cotton, and wood fiber materials together shall be not less than 15 percent (15%) nor more than 30 percent (30%) of the hydraulically applied straw mulch. The date of installation of hydraulically applied straw mulch cover shall be less than twelve (12) months from the date of production. The date of production of hydraulically applied straw mulch material shall be presented for a Construction PLA's verification through the Engineer. All hydraulically applied straw mulch material shall also meet the requirements of Subsection 805-2.05 (A) stated above.

2.06 Slow-release Chemical Fertilizer and Sulfur:

Chemical fertilizer shall conform to the requirements of Subsection 805-2.06 of the specifications and shall be the kind hereafter specified. Fertilizer shall be composed of a mixture of one part sulfur-coated urea 25-4-8, one-part monoammonium phosphate 11-52-0-, and one-part methylene urea 38-0-0. The sulfur-coated urea, a blended fertilizer 25-4-8, shall have approximately 80 percent (80%) of the nitrogen defined as slow release, and contain five percent (5%) Iron, ten percent (10%) sulfur and trace amounts of zinc and manganese. The result shall be a 24-18-2 chemical blended fertilizer, as specified herein.

In addition to the fertilizer mixture, agricultural sulfur compounds, comprised of between 80 percent (80%) and 96 percent (96%) sulfur, shall be applied at the rate specified in Section 3.02. Chemical fertilizer and sulfur shall not be applied to the seeding area below the OHWM.

2.07 Water:

Water shall be free of oil, acid, salts or other substances which are harmful to plants. All non-potable water shall be tested for its suitability for seeding/planting with the water quality-related concerns of salinity, pathogens and contaminants. The water quality testing result shall be presented for a Construction PLA's evaluation through the Engineer. An Arizona Guide to Water Quality and Uses (web link: <https://extension.arizona.edu/sites/extension.arizona.edu/files/pubs/az1610.pdf>) Figure 8, Water Quality and Uses Triangle shall be considered as reference for testing result evaluation and approval.

Water Quality Standards for seeding on construction projects that reach or exceed one-contiguous-acre (≥ 1 contiguous acre) permit threshold soil/ground disturbance defined under current Arizona Pollutant Discharge Elimination System (AZPDES) Construction General Permit (CGP) and/or National Pollutant Discharge Elimination System (NPDES) CGP:

- (A) On Arizona Non-Native Americans Land (**Non-Tribal**), water quality for seeding construction within 0.25-mile buffer zones of Impaired and/or Outstanding Arizona Waters (OAWs) shall meet the standards of current AZPDES CGP, as well as requirements of these Special Provisions.

The web link of ADEQ's eMaps within the State of Arizona:
<https://www.azdeq.gov/emaps>

- (B) Water quality for seeding construction within Arizona Native Americans Land (**Tribal**) shall meet the standards of EPA-established or approved Total Maximum Daily Loads (TMDLs) under current NPDES CGP, as well as requirements of these Special Provisions.

The web link of EPA-established or approved TMDLs within the State of Arizona:

<https://www.epa.gov/npdes/epas-stormwater-discharge-mapping-tools>

The source of water shall be approved by a Construction PLA through the Engineer prior to use.

2.08 Compost:

Compost in bulk or furnished in containers or bags, shall consist of composted organic vegetative materials, and may contain worm castings. No animal manures or city biosolids shall be used in the composting or added to the compost. Prior to being furnished on the project, compost samples shall be tested for the specified microbiological and nutrient conditions, including maturity and stability, by a testing laboratory approved for testing organic materials. During pre-activity seeding construction meeting, compost test written results submitted to the Engineer for approval shall be within nine (9) months from the date of the official lab test.

Compost material shall be dark brown in color with the parent material composted and no longer visible. The structure shall be a mixture of fine and medium size particles and humus crumbs. The maximum particle size shall be within the capacity of the contractor's equipment for application to the constructed slopes. The odor shall be that of rich humus with no ammonia or anaerobic odors.

Bulk Compost shall also meet the requirements of Table 3:

TABLE 3	
Cation Exchange Capacity (CEC)	Greater than 45 meq/100 g
Carbon : Nitrogen Ratio (C : N)	Less than 20 : 1
pH (of extract)	5.0 – 8.5
Organic Matter Content	Greater than 30%
Total Nitrogen (not added)	Greater than 1%
Micronutrients (added)	S, Ca, Mg, Na, Fe, Al, Mn, Cu, Zn, B
Maturity Index	Greater than 50% on Maturity Index at a 10 : 1 ratio
Stability Indicator, CO ₂ Evolution: Biologically Available C (BAC)	Less than 4mg CO ₂ -C/g OM/day is desirable. From 4 through 8mg CO ₂ -C/g OM/day is acceptable. Greater than 8mg CO ₂ -C/g OM/day is not acceptable.
The CEC lab testing method shall refer to EPA9081 at the web link: http://epa.gov/osw/hazard/testmethods/sw846/pdfs/9081.pdf	

Bulk compost is preferred and shall be applied to areas designated for seeding at the specified rate of 15 cubic yards per acre prior to final tillage for incorporation into the soil seedbed. Unless otherwise approved by the Engineer, bulk compost shall be engaged to all areas where equipment can be operated for final tillage in order to incorporate into the soil seedbed. Bulk compost may be substituted with hydraulically applied compost for small sized projects that cover less than five (< 5) acres of Class II Seeding as evaluated by a Construction PLA, as well as approved by the Engineer.

The volume of bulk compost shall be measured and documented for Construction PLA's verification and approval through the Engineer.

In areas where bulk compost cannot be applied by broadcast methods, compost shall be applied hydraulically as per the approval of the Engineer. Hydraulically applied compost shall be applied at the rate of 5 cubic yards (or 135 cubic feet) per acre to mini-benched slopes or on other approved areas for incorporation into the soil seedbed. For seeding areas 3:1 and flatter where bulk compost cannot be employed, hydraulically applied compost shall be utilized at the rate of 5 cubic yards (or 135 cubic feet) per acre as per the approval of the Engineer. Hydraulically applied compost may also be combined with seed, soil amendments, and fertilizer in the same slurry prior to the final mulch cover with the approval of the Engineer.

The volume of hydraulically applied compost shall be measured and documented for Construction PLA's verification and approval through the Engineer.

Hydraulically applied compost shall meet the requirements of Table 4 below:

TABLE 4	
Cation Exchange Capacity (CEC)	Greater than 40 meq/100 g *
Carbon : Nitrogen Ratio (C : N)	Less than 20 : 1
pH (of extract)	5.0 – 8.5
Organic Matter Content	Greater than 35%
Total Nitrogen (not added)	Greater than 1%
Micronutrients (added)	S, Ca, Mg, Na, Fe, Al, Mn, Cu, Zn, B
Stability Indicator, CO ₂ Evolution: Biologically Available C (BAC)	Less than 4mg CO ₂ -C/g OM/day is desirable. From 4 through 8mg CO ₂ -C/g OM/day is acceptable. Greater than 8mg CO ₂ -C/g OM/day is <u>not</u> acceptable.
Moisture Content by Weight	From 15% through 25%
The CEC lab testing method shall refer to EPA9081 at the web link: http://epa.gov/osw/hazard/testmethods/sw846/pdfs/9081.pdf	

* When CEC is from 50 meq/100 g through 55 meq/100 g, in order to be approved, the contractor may add 100 pounds additional Hydraulically Applied Compost per acre to compensate for the lower-than-standard CEC value.

Compost shall not be applied to the seeding area below the OHWM. The choice between bulk compost and hydraulically applied compost shall be evaluated, as well as coordinated by a Construction PLA according to specific project conditions with the approval of the Engineer.

2.09 Soil Conditioners:

Soil conditioners, when required, will be as shown in the Special Provisions.

3.0 Construction Requirements:

3.01 General:

(A) Seeding Operations:

At least two (2) weeks prior to beginning seeding, the contractor shall complete and submit a batch mix and seed application form to the Engineer for approval. The batch mix form will be supplied by the Engineer.

After acceptance of the form stated above, the Engineer and contractor in coordination with Construction PLA shall determine a half-acre (0.5 acre) sample demonstrative area to be seeded and mulched prior to applying seed to the remainder of the project. Both regular straw mulch and hydraulically applied straw mulch shall be applied to the sample demonstrative area, as determined during on-site pre-activity seeding construction meeting. Both straw mulches shall be representative of the materials proposed for use on the project. If the seeding and mulching procedures, as well as outcomes, are acceptable by Construction PLA, the contractor shall begin seeding operations as specified herein. Photographic Documentation of half-acre (0.5 acre) sample demonstrative seeded/mulched area shall be recorded and submitted to a Construction PLA, as comparative standard representation (mandatory visual reference) for Seeding Acceptance under Subsection 3.07 stated below.

The contractor shall notify the Engineer at least two (2) days prior to commencing any phase of seeding operations for the remainder of the project.

The equipment and methods used to distribute seeding materials shall provide an even and uniform application of seed, mulch, and other materials at the specified rates.

It is the contractor's responsibility to furnish all suitable equipment for soil tillage, seeding, and mulching at no additional cost to the Department.

Unless specified otherwise in the Special Provisions, seeding operations shall not be performed on undisturbed soil outside the clearing and grubbing limits of the project or on steep rock cuts.

The contractor shall coordinate the seeding operations with the grading operations to determine mobilization frequency as embankment and cut slopes are finished throughout the duration of the project. Seeding shall be done during suitable weather and soil conditions (soil-water and soil-temperature regimes) for tillage and placement of materials. Seeding operations shall not be performed below 35 degrees Fahrenheit (°F). Seeding operations shall not be performed when wind exceeds ten (10) miles per hour or, in the opinion of the Engineer,

conditions would prevent uniform application of materials or would carry seeding materials into areas not designated for seeding. If wind exceeds ten (10) miles per hour, the seeding operation shall be evaluated by a Construction PLA and approved by the Engineer. If approved, the contractor shall perform seeding operation close to the ground surface with a hydro-seeding hose and hand-held hose-end sprayer nozzle or other equivalently effective seeding methods to guarantee all seeding materials are applied on the target area without being blown away by wind. The contractor is responsible for protecting ambient air and water quality during the seeding operation.

The contractor shall not expose an area greater than 750,000 square feet (≤ 17.22 acre) at any one location within the project limits until the seeding proposed for that portion of the project has been installed and accepted by the Engineer. Seeding shall be accomplished within 14 days after slopes and disturbed areas have been completed. Seeding operations shall comply with Subsection 104.09 and the applicable portions of Section 203 of the specifications, and as directed by the Engineer.

Frequent mobilizations may be required to accomplish seeding as specified herein. The Department will consider the cost of such multiple mobilizations to be included in the price bid for the seeding. No adjustments will be made to the contract for the number of seeding mobilization activities. Should the contractor fail to provide seeding for a sub-area as specified herein, the Engineer will immediately notify the contractor of such non-compliance. Should the contractor fail to immediately remedy the unstabilized area, the Engineer may suspend work until such seeding stabilization has been completed or proceed to provide the necessary seeding stabilization. The entire cost of such work will be deducted from the monies due or to become due to the contractor. In addition, no adjustment to the contract time will be made for suspensions resulting from the contractor's failure to provide seeding for a sub-area within the time periods specified herein.

3.02 Tillage:

Where equipment can operate, the area to be seeded shall be prepared with a ripper bar, chisel plow, or with other devices to provide thorough soil cultivation to the depth specified below. It is the contractor's responsibility to furnish all suitable equipment for soil tillage at no additional cost to the Department.

Where equipment is not suitable for operation, hand tillage and/or other manual methods shall be utilized as approved by the Engineer. Tillage depth shall follow the requirements specified herein in accordance with assessment/measurement from a Construction PLA, as well as acceptance by the Engineer.

For areas too steep to be prepared for seeding after the slope has been completed, as determined by the Engineer, tillage shall be accomplished with appropriate equipment as the slope is being constructed. On slope areas, all tillage shall be horizontal and parallel to the contours of the areas involved in order to create a roughened surface condition to reduce stormwater runoff velocity and volume. All seeding areas suitable for tillage shall be pre-tilled to promote on-site stormwater infiltration and alleviate stormwater surface runoffs, as a part of stormwater peak flow and Volume Reduction Approaches (VRAs). All seeding areas suitable for tillage shall be adequately pre-tilled to minimize pollutant loads anticipated in

nonpoint source stormwater runoffs. All project areas eroded shall be restored to the specified condition, grade, and slope as directed prior to seeding.

Cut slopes shall be prepared with ridges and deep tillage or shall be mini-benched so as to detain rainwater/moisture close to its source. On fill slopes, the operations shall be conducted in such a manner as to form minor ridges thereon to assist in retarding runoff associated erosion/pollution and favor germination of the seed through detaining rainwater/moisture close to its source.

Except as specified herein, slopes shall be constructed in accordance with Subsection 203-3.03(B) of the specifications. Cut slopes flatter than 3:1 (horizontal to vertical) shall be tilled a minimum of 12 inches in depth and fill slopes flatter than 3:1 shall be tilled to a six-inch minimum depth. All slopes steeper than 3:1, and areas which could potentially be affected by underground utilities, shall be tilled to a minimum six (6) inches in depth, and left in a roughened surface condition as they are constructed.

Track-walking or imprinting of rocky new fill slopes through mechanical methods in lieu of tillage may be allowable if accepted by a Construction PLA, through the Engineer. All final impression marks generated by track-walking or imprinting shall be horizontal and parallel to the contours of slope areas involved in order to create a roughened surface condition and reduce stormwater runoff velocity, enhance erosion/sediment control, as well as energy/velocity dissipation.

Tillage shall be a minimum of two (2) inches in depth for the first ten (10) feet from the toe of AC wedge including shoulder build-up areas (edge of pavement build-up areas) or from the outside edge of curb and gutter.

Care shall be taken during the seeding operations to prevent damage to existing trees and shrubs in the seeding area in accordance with the requirements of Subsection 107.11 of the specifications.

Tillage may require passing the equipment over the area several times to provide thorough soil cultivation. Furrows from the tillage shall be no more than 12 inches apart. No work shall be done when the moisture content of the soil is unfavorable to tillage.

All competitive vegetation shall be uprooted prior to seeding and the soil shall be left in a friable roughened surface condition free of clods or large stones over four (4) inches in any dimension, and other foreign material that would interfere with the seeding operation. Exposed stones larger than four (4) inches shall be removed and disposed of in an approved manner prior to grading and seeding. Invasive and non-native weed species shall be eradicated according to the MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS) of these Special Provisions whenever applicable.

All disturbed soil areas covered with existing chipped wood materials and/or native plant residues, which will not interfere with the tillage operation, shall be tilled for incorporation into the soil along with chemical fertilizer, as well as soil amendments (sulfur and compost) prior to final tillage and seeding.

Regardless of the method of seeding application, all areas prepared with tilling shall have chemical fertilizer and soil amendments (sulfur and compost) uniformly applied and incorporated (disked) into the soil prior to final tillage and seeding.

Chemical fertilizer and sulfur shall be applied at the rate of 200 pounds each per acre. Bulk compost shall be applied at the rate of 15 cubic yards per acre.

Unless otherwise approved by the Engineer, bulk compost shall be applied using broadcast methods to all areas where equipment can be operated. For areas where bulk compost cannot be applied by broadcast methods, as evaluated by a Construction PLA and determined by the Engineer, compost shall be applied hydraulically at the rate specified in Section 2.08 above. Hydraulically applied compost shall not be combined with final mulch cover in the same slurry. However, seed, sulfur and fertilizer may be utilized together with hydraulically applied compost in the same slurry with the approval of the Engineer. Final mulch cover shall be installed on top of all seeded areas as a separate construction sub-phase.

Slopes 3:1 and flatter shall have fertilizer, sulfur, and compost tilled/disked into a minimum of the top four (4) inches of the surface. Slopes steeper than 3:1 shall have fertilizer, sulfur, and compost uniformly broadcast for incorporation into the soil as directed by the Engineer. Unless otherwise operated together with hydraulically applied compost for the approved locations, fertilizer and sulfur shall not be applied hydraulically to areas for seeding.

Tillage shall not be applied for the seeding area below the OHWM.

For mini-benched slopes, fertilizer, compost, and sulfur shall be applied at the specified rates with no tillage or incorporation.

Seeding shall not initiate until all tillage areas and/or mini-benched slopes are accomplished as approved by a Construction PLA through the Engineer.

3.03 Seeding:

(A) General:

Drill seeding with straw mulch shall be considered as the preferred method of seed application when practicable. Unless otherwise approved by the Engineer, drill seeding shall be used for all areas with slopes of 3:1 or less.

Hydroseeding shall be the alternative method for seed distribution for slopes in excess of 3:1, and where drill seeding is not practicable or suitable for soil conditions and seed types, as determined by the Engineer.

Seeds not suitable for drill seeding and hydroseeding methods shall be broadcast manually. Areas to be seeded manually shall be completed after the final soil tillage and prior to any drill or hydroseeding.

Regardless of the seeding method(s), the contractor is responsible to guarantee intimate seed-soil contact. Seed application on top of straw mulch cover or hydraulically applied straw mulch cover shall be rejected. To guarantee intimate seed-soil contact, seed application on

top of existing exposed chipped wood materials and/or plant residues ground cover shall be rejected.

Final straw mulch cover or hydraulically applied straw mulch cover shall be applied on all seeded areas, as specified in Sections 3.04 and/or 3.05, within 24 hours of seed application. The seeding application shall be accomplished prior to installation of straw mulch cover or hydraulically applied straw mulch cover. Combining the seed application process with the mulching process will not be acceptable. By implementing Low Impact Development (LID) source-control measure, the contractor shall install a final straw mulch cover or hydraulically applied final straw mulch cover to minimize raindrop splash erosion and wind erosion/dust, as close as possible at the source of disturbance to protect all seeded areas. Thermally-refined wood fiber shall not be utilized solely as final mulch cover to protect all seeded areas. Seeds shall be neither exposed nor visible after the installation of straw mulch cover or hydraulically applied straw mulch cover.

Unless otherwise specified in the Special Provisions, Class II seeding areas shall not be watered after planting.

(B) Drill Method:

After the tillage and incorporation of fertilizer, sulfur, and compost is completed and accepted by the Engineer, seed shall be planted with a drill seeder capable of accurately metering the specific seed mix. Use of a drill seeder shall not damage the prepared seedbed and shall provide a soil cover over the planted seed.

Seed shall be planted approximately 1/4 inch deep, with a maximum depth of 1/2 inch. The distance between the furrows produced using the drill process shall not be more than eight (8) inches. If the furrow openers on the drill exceed eight (8) inches, the area shall be drilled twice. Seeding shall be done with grass seeding equipment with double disc openers, depth bands, packer wheels or drag chains, rate control attachments, seed boxes with agitators and separate boxes for small seeds. Seed of different sizes shall be sowed from at least two (2) separate boxes adjusted or set to provide the planting rate as specified.

(C) Hydroseed Method:

Areas and seed types not suitable for drill-seeding, as determined by the Engineer, shall be hydroseeded. The contract-specified seed shall be applied in a slurry containing 200 pounds of thermally-refined wood fiber and a minimum of 40 pounds tacking agent per acre. Seed shall not be in the slurry for more than 30 minutes. Hydroseeded areas shall have 100 percent (100%) coverage from all directions as evaluated by a Construction PLA, as well as approved by the Engineer. Hydroseeded areas shall also be mulched, as specified in Sections 3.04 or 3.05, within 24 hours of application of the seed.

(D) Manual Application:

Manually applied seeds shall be broadcast evenly to produce uniform distribution over the seeded areas.

3.04 Applying Straw Mulch as Final Mulch Cover on Top of Seeded Areas:

(A) General:

Within 24 hours after each area is planted, straw mulch shall be uniformly applied at the minimum rate of 2 1/2 tons per acre for areas to be crimped and tacked, and minimum two (2) tons per acre for tacked-only areas. Except for edge of pavement build-up areas, and unless otherwise specified by the Engineer, straw mulch shall be applied to all seeded areas. Areas to receive hydraulically applied straw mulch, if directed by the Engineer, shall be mulched in accordance with Section 3.05.

During seeding and mulching operations, care shall be exercised to prevent drifting and displacement of materials. Mulch material, which is placed upon trees and shrubs, roadways, structures, and upon any areas where mulching is not specified, or which is placed in excessive depths on mulching areas, shall be removed as directed. Mulch materials which are deposited in matted condition shall be loosened and uniformly spread to the specified depth over the mulching areas. Any unevenness in materials shall be immediately corrected by the contractor. In addition, the contractor shall minimize production of dust or other airborne particulate matter during application of straw mulch, either by moistening the straw, modifying equipment with misters, or through other means approved by the Engineer.

Except as specified in the next paragraph, straw mulch applied to seeded areas shall be immediately affixed by crimping and tacking after application. No mulch shall be applied to seeding areas which cannot be crimped and/or tacked by the end of each day. Any drifting or displacement of mulch before crimping and/or tacking shall be corrected by the contractor at no additional cost to the Department.

Crimping shall not be required for areas that are steeper than 3:1. Crimping may also be waived, when specifically directed by the Engineer, for drill seeded or hydroseeded areas with rocky conditions or other areas deemed unsuitable by the Engineer for crimping. Straw mulch applied to such areas shall only be tacked, as specified in Subsection 3.04(C) below.

Prior to the application of a tacking agent, protective covering shall be placed on all structures and objects where stains would be objectionable. All necessary precautions shall be taken to protect the traveling public and vehicles from damage due to drifting spray.

(B) Anchorage by Crimping:

Except as specified above in 3.04(A), crimping shall be required for all straw mulched areas. Straw mulch shall be anchored into the soil with a heavy disc. Discs shall be flat and serrated, with at least 1/4-inch thickness having dull edges, and spaced no more than nine (9) inches apart. Straw mulch shall be anchored to a depth of at least two (2) inches and shall not be covered with an excessive amount of soil. Anchoring operations shall be across the slopes where practical, with no more than two (2) passes of the anchoring equipment. Immediately following the crimping operation, the crimped area shall be tacked as specified in Subsection 3.04(C) below.

(C) Anchorage by Tacking:

Straw mulch shall be anchored by tacking, using a slurry consisting of a minimum of 150 pounds of tacking agent, 500 pounds of thermally refined wood fiber mulch, and 300 gallons of water per acre. The contractor may increase the quantities of components to ensure the stability of the straw mulch to provide erosion control during the 45-calendar-day maintenance period at no additional cost to the Department.

3.05 Hydraulically Applied Straw Mulch with Tacking Agent as Final Mulch Cover on Top of Seeded Areas:

Areas seeded but not practical for straw mulch, as determined by the Engineer, shall have hydraulically applied straw mulch with tacking agent applied at the variable rates shown in Table 5 below.

TABLE 5			
Slope (H:V)	Hydraulically Applied Straw Mulch (pounds per acre – dry weight)	Tacking Agent (pounds pure mucilage per acre – dry weight)	Thermally-Refined Wood Fiber (pounds per acre – dry weight)
Flat to 6:1	2,000	150	400
From greater than 6:1 to 3:1	2,500	150	500
Greater than 3:1	3,000	200	600
Erosive Soil Slopes or Highly Erosive Areas*	3,500	250	700
* As determined by Engineer			

The contractor shall submit a batch (tank) mix quantity schedule for mulch application to the Engineer for approval prior to mixing hydraulically applied straw mulch, thermally-refined wood fiber, and tacking agent in a slurry. Batch mixing and coverage will be monitored throughout the seeding operations. The contractor shall coordinate the mixing and application operations with the Engineer in advance of all mixing. Fertilizer or seed shall not be mixed into any slurry for temporary erosion control mulch application. To guarantee intimate seed-soil contact, seed shall not be mixed into any slurry with hydraulically applied straw mulch as final mulch cover.

3.06 Shoulder Build-up Areas — Edge of Pavement Build-up Areas:

Seeding shall be applied to all new earthen and milled asphaltic concrete edge of pavement build-up areas. Edge of pavement build-up areas shall be tilled two (2) inches deep from the toe of AC wedge to the toe of the edge of pavement build-up area prior to seeding.

After the two-inch tillage is complete, compost, fertilizer, seeding, and mulching shall be done in three (3) separate steps. For the first step, fertilizer and compost shall be broadcast evenly over both types of edge of pavement build-up areas. For the next step, seed shall be applied by hydroseeding for both types of areas. For the third step, seeded edge of pavement build-

ups comprised of milled asphaltic concrete shall have hydraulically applied straw mulch and tacking agent applied, and earthen edge of pavement build-up areas shall have straw mulch or hydraulically applied straw mulch applied, with a tacking agent in either case. No crimping shall be required.

The application rate of hydraulically applied straw mulch and tacking agent shall be as specified in Table 5 above.

3.07 Seeding Acceptance:

After application, the Engineer will inspect seeded areas or sub-areas for conformance to the contract requirements. The contractor shall correct, to the satisfaction of the Engineer, any areas not conforming to the specifications. The 45-calendar-day seeding maintenance period will begin upon Initial Seeding Construction Acceptance of an area by a Construction PLA through the Engineer.

The contractor shall maintain and stabilize each area or sub-area, including edge of pavement build-up area(s), for a minimum period of 45 calendar days, after Initial Seeding Construction Acceptance, as evaluated by a Construction PLA, as well as approved by the Engineer. Any areas damaged from erosion, or those that have less than 90 percent ($< 90\%$) of the remaining final mulch cover, shall be re-seeded, re-mulched, and re-tacked at no additional cost to the Department. The Construction PLA shall assess the seeded area in comparison to the pre-established half-acre (0.5 acre) sample demonstrative area for Class II Seeding to determine the necessity of re-seeding, re-mulching, and re-tacking.

A new 45-calendar-day maintenance period for an area is not required after re-seeding work; however, the initial or original period remains in effect.

4.0 Method of Measurement:

Seeding (Class II) will be measured by the acre, to the nearest one acre of ground surface seeded. Measurements will be along the ground surface for the areas seeded and mulched, as approved by the Engineer.

5.0 Basis of Payment:

During pre-activity construction meeting, the contractor in conjunction with Engineer shall verify and be in agreement with the quantity of seeding areas as evaluated by a Construction PLA. The quantity of areas to be seeded shall be in compliance with environmental requirements.

The accepted quantities for Seeding (Class II), measured as provided above, will be paid in two (2) phases corresponding to the application stage and the 45-calendar-day maintenance stage.

Upon completion of the application stage through evaluation by a Construction PLA and acceptance by the Engineer in the presence of contractor, the contractor will be paid 70 percent (70%) of the contract bid price per acre for the completed work. Such price will be considered full compensation for furnishing and applying the contract-specified seed mix,

fertilizers, soil amendments, tillage, mulch materials, and tacking agent, all required testing, as well as all equipment and labor required to complete the work as specified herein.

Upon completion of the 45-calendar-day seeding maintenance stage, and acceptance by a Construction PLA through the Engineer, the contractor will be paid the remaining 30 percent (30%) of the contract bid price per acre for the completed work. Such price will be considered full compensation for seeding maintenance, including all equipment, labor, and materials required to correct deficiencies in seeded, mulched areas, as specified herein.

No measurement or payment will be made for any of the mobilizations required to apply and stabilize the seeding for each area or sub-area, as specified herein, the cost being considered as included in the contract price for Seeding (Class II).

No measurement or payment will be made for traffic control for work during the 45-calendar-day seeding maintenance period.

An adjustment to the contract will be made if a contractor-requested seed substitution is approved as specified in Subsection 2.02(B) above.

(913BKPRT, 02/18/21)

SECTION 913 BANK PROTECTION: of the Standard Specifications is revised to read:

913-1 Description:

The work under this section shall consist of furnishing all materials and constructing bank protection in accordance with the details shown on the plans and the requirements of the specifications.

Bank protection shall be dumped riprap, grouted riprap, wire tied riprap, riprap in wire baskets or gabions, soil-cement, and other types of bank protection and shall be constructed at the locations and as shown on the plans.

913-2 Materials:

913-2.01 Riprap Bank Protection:

(A) Rock:

Rock shall be sound and durable, free from clay or shale seams, cracks or other structural defects.

The bulk (SSD) specific gravity of the rock shall be a minimum of 2.4 as determined in accordance with the requirements of Arizona Test Method 210.

Rock used to construct dumped riprap shall be angular in shape. Rock used to construct other types of bank protection may be rounded stones or boulders. Rock shall have a least dimension not less than one-third of its greatest dimension and a gradation in reasonable

conformity with that shown herein for the various types of bank protection. Control of the gradation will be by visual inspection.

When a source of rock is designated by the Department, it shall be the contractor's responsibility to negotiate for the material, obtain the right-of-way, and pay all royalties and damages.

The acceptability of the rock will be determined by the Engineer by visual inspection and/or testing. If testing is required, suitable samples of rock shall be taken in the presence of the Engineer at least 25 days in advance of its expected use. The approval of some rock fragments from a particular quarry site shall not be construed as constituting the approval of all rock fragments taken from that quarry.

During construction of the bank protection, the contractor shall provide two samples of rock for the intended use. The amount of each sample for dumped riprap and riprap (slope mattress) shall be at least five tons. The amount of each sample for grouted riprap, wire tied riprap, gabions, and rail bank protection shall be at least 500 pounds. One sample shall be provided at the construction site and may be a part of the finished bank protection. The other sample shall be provided at the quarry. These samples will be used as a frequent reference for judging the gradation of the rock supplied. Any difference of opinion between the Engineer and the contractor shall be resolved by checking the gradation of two random samples of the rock.

Material that is deemed unacceptable by the Engineer shall be replaced with acceptable material at no additional cost to the Department.

(1) Grouted Riprap:

Gradation of the rock for grouted riprap shall be as specified in the Special Provisions or as shown on the plans.

(2) Wire Tied Riprap:

Rock for wire tied riprap shall be well graded with at least 95 percent exceeding the least dimension of the wire mesh opening. The maximum size rock, measured normal to the mat, shall not exceed the mat thickness.

(3) Dumped Riprap:

Gradation of the rock for dumped riprap shall be as shown on the plans or as specified in the Special Provisions.

All equipment, sorting sites, and labor needed to check gradation shall be provided by the contractor at no additional cost to the Department.

(4) Gabions:

Rock for gabions shall be well graded, varying in size from 4 to 8 inches.

(5) Riprap (Slope Mattress):

Rock for slope mattress shall be well graded with 70 percent exceeding three inches. The maximum dimension of a single rock shall not exceed the least dimension of the gabion.

(6) Rail Bank Protection:

Rail bank protection rock shall be well graded, varying in size from 4 to 12 inches.

(B) Metal Items:

(1) Wire Fabric:

Welded wire fabric shall be galvanized and shall conform to the requirements of AASHTO M 336, except that the minimum weight of the zinc coating shall be 0.15 ounces per square foot of actual surface.

Woven wire fabric shall be galvanized and shall conform to the requirements of ASTM A116, except that the minimum weight of the zinc coating shall conform to the requirements of ASTM A641, Class 3.

Wire fabric shall be of the diameter, spacing, pattern, and dimensions shown on the plans. The selvage on each sheet of mesh shall be galvanized steel wire with a minimum diameter 25 percent larger than that used in the body of the mesh.

Certificates of Compliance conforming to the requirements of Subsection 106.05 of the specifications shall be submitted to the Engineer.

(2) Miscellaneous Fittings and Hardware:

Miscellaneous fittings and hardware shall be of the type and size provided by the manufacturer of the major item to which they apply and shall be galvanized in accordance with the requirements of AASHTO M 232.

Certificates of Compliance conforming to the requirements of Subsection 106.05 of the specifications shall be submitted to the Engineer.

(3) Tie Wires:

Tie wires shall be of good commercial quality and the size shall be as shown on the plans, except that the minimum weight of the zinc coating shall conform to the requirements of ASTM A641, Class 3. The contractor may use approved wire fasteners on gabions, slope mattresses, or wire fabric in lieu of tie wires.

Certificates of Compliance conforming to the requirements of Subsection 106.05 of the specifications shall be submitted to the Engineer.

(4) Steel Cable:

Steel cable shall be zinc-coated steel structural wire rope conforming to the requirements of ASTM A475, seven-wire strand, Class A, for the diameter shown on the plans.

Certificates of Compliance conforming to the requirements of Subsection 106.05 of the specifications shall be submitted to the Engineer.

(5) Railroad Rail:

Railroad rails may be new or used. If used rails are furnished, they shall be free from rust and equal to at least 95 percent of the original section.

(6) Soil Anchor Stakes:

Soil anchor stakes shall be made of steel and of the length shown on the plans. When not specified to be railroad rails, the following items may be used: crane rails with a weight of at least 40 pounds per linear foot, 2-inch diameter steel pipe conforming to the requirements of ASTM A53, or 3-inch by 3-inch by 3/8-inch structural steel angles conforming to the requirements of ASTM A36. Used rails, pipes or angles may be used provided the material is not rusted or damaged to the extent that the strength of the item is reduced to less than 90 percent of a new item of the same type and size.

Certificates of Compliance conforming to the requirements of Subsection 106.05 of the specifications shall be submitted to the Engineer.

(C) Bedding Material:

Bedding material shall consist of granular material having a maximum dimension of 2 inches and shall be free of clay or organic material.

(D) Grout:

Grout shall consist of Portland cement, aggregate, and water. It may also contain supplementary cementitious material. Portland cement, aggregate, water, and supplementary cementitious material shall conform to the requirements of Section 1006 of the specifications. Chemical admixtures may be used and shall conform to the requirements of Subsection 1006-2.04 of the specifications, except no admixtures containing chlorides or nitrates shall be used. Air-entraining admixtures, conforming to the requirements of Subsections 1006-2.04 and 1006-3.01(E) of the specifications, shall be required for grout placed at elevations of 3000 feet or above.

The grout shall meet the requirements shown in table 1:

Table 1			
Minimum Cementitious Material Content: Lbs per CY (See Note 1)	Maximum Water/Cementitious Material Ratio (w/cm): Lb./Lb.	Slump: Inches (See Note 2)	Air Content: Percent (See Note 3)
850	0.60	9 ± 2	0 – 8
Notes: (1) A maximum of 25 percent of the cementitious material, by weight, may consist of an approved Class F fly ash, conforming to the requirements of ASTM C618. (2) The slump shall be in the appropriate range to permit gravity flow into the interstices with limited spading and brooming. The consistency of the grout shall be as approved by the Engineer. (3) For placement of grout at elevations of 3000 feet or above, the air content shall be a minimum of 4 percent and a maximum of 8 percent.			

The mix shall consist of fine aggregate; however, the contractor may use No. 8 coarse aggregate in the grout. If No. 8 coarse aggregate is used, the volume shall be a maximum of 35 percent of the total aggregate volume.

For plant-mixed grout, the proportioning, mixing, and placing shall be in accordance with the applicable requirements in Section 1006 of the specifications.

For on-site mixing, grout that has been mixed more than one hour shall not be used.

Retempering of grout will not be permitted.

(E) Bank Protection Fabric:

Fabric shall be supplied in accordance with and conform to the material requirements of Subsections 1014-1 and 1014-5 of the specifications, respectively. Special attention shall be given to the required survivability of the fabric.

The identification, packaging, handling, and storage of the geotextile fabric shall be in accordance with ASTM D4873. Fabric rolls shall be furnished with suitable wrapping for protection against moisture and extended ultraviolet exposure prior to placement. Each roll shall be labeled or tagged to provide product identification sufficient to determine the product type, manufacturer, quantity, lot number, roll number, date of manufacture, shipping date, and the project number and name to which it is assigned. Rolls shall be stored on-site or at another storage location in a manner which protects them from the elements. If stored

outdoors, rolls shall be elevated and protected with a waterproof, light colored, opaque cover. At no time, shall the fabric be exposed to sunlight for a period exceeding 14 days.

(F) Sacked Concrete:

Sacked concrete shall be utility concrete conforming to the requirements of Section 922 of the specifications, except that the minimum cement content shall be 376 pounds per cubic yard; the slump shall be from 3 to 5 inches; and the aggregate shall conform to the gradation requirements shown in table 2 when tested in accordance with the requirements of Arizona Test Method 201:

Table 2	
Sieve Size	Percent Passing
2 inch	100
1/4 inch	45 - 89
No. 200	0 -12

Sacks for sacked concrete riprap shall be made of at least AASHTO M 182, Class 3, burlap and shall be approximately 19-1/2 by 36 inches measured inside the seams when the sack is laid flat, with an approximate capacity of 1-1/4 cubic feet. Sound, reclaimed sacks may be used.

913-2.02 Soil-Cement Bank Protection:

(A) Hydraulic Cement, Fly Ash, and Water:

Hydraulic cement, fly ash, and water shall conform to the requirements of Subsection 1006-2 of the specifications.

(B) Soil-Aggregate:

The source of soil-aggregate materials shall be the responsibility of the contractor. The contractor shall be solely responsible for the construction of the stockpile(s), including monitoring for quality and uniformity of the material placed therein. The soil-aggregate used in the soil-cement mixture shall consist of stones, gravel or other approved inert material of similar characteristics, and shall be clean and free from vegetable matter and other deleterious substances. Soil-cement aggregate shall conform to the gradation requirements shown in table 3 when tested in accordance with Arizona Test Method 201:

Table 3	
Soil-Cement Aggregate	
Sieve Size	Percent Passing
1-1/2 in	98 - 100
No. 4	60 - 90
No. 200	5 - 15

Class 2 ABC may be used in-lieu of aggregate meeting the requirements of the table 3. The contractor may submit a request to use alternate material to the Engineer for review and approval.

The Plasticity Index shall be a maximum of seven when tested in accordance with the requirements of AASHTO T 90.

Clay lumps larger than 1 inch shall be removed.

When soil-aggregates are stored on the ground, the sites for the stockpiles shall be clear of all vegetation and level. The bottom six inch layer of aggregate stored on the ground shall not be disturbed or used.

The debris or waste material resulting from the clearing and preparing of the site shall be disposed of in accordance with Subsection 201-3.02 of the specifications.

(C) Mix Design Requirements for Soil-Cement Bank Protection:

Utilizing soil-aggregate, cementitious material, and water, a mix design conforming to the requirements specified herein shall be formulated and submitted by the contractor to the Engineer for approval prior to incorporating any of the material into the work.

The amount of cement shall be determined by laboratory testing by the contractor in accordance with Arizona Test Method 220. For mix design purposes only, the cement content of the soil-cement mixture shall be determined as the cement content which yields a seven day compressive strength of 1250 psi for the soil-cement mixture.

The percent of cement to be used in the mix shall be calculated to be the weight of cement divided by the total weight of the dry compacted soil-cement.

Included in the mix design data shall be the grade of cement, brand of fly ash, and the source of aggregate. A new mix design shall be submitted for approval any time the contractor requests a change in soil-aggregate source from that given in the approved mix designs.

913-3 Construction Requirements:

913-3.01 Riprap Bank Protection:

Areas on which bank protection is to be constructed shall be cleared, grubbed, and excavated or backfilled in accordance with the requirements of the appropriate sections of Division II to produce a ground surface in reasonable conformance with the lines and grades shown on the plans or established by the Engineer.

Placement through water will not be permitted unless otherwise approved by the Engineer.

Areas which are excavated for installation of rail bank protection shall be backfilled to original ground or to the lines and grades shown on the plans.

(A) Bank Protection Fabric:

When fabric is required, it shall be placed in the manner and at the locations shown on the plans. The surface to receive the fabric shall be free of obstructions, depressions and debris. The fabric shall be loosely laid and not placed in a stretched condition.

The strips shall be placed to provide a minimum 24 inches of overlap for each joint. On horizontal joints, the uphill strip shall overlap the downhill strip. On vertical joints, the upstream strip shall overlap the downstream strip. The fabric shall be protected at all times during construction from extensive exposure to sunlight.

When the maximum size of the rock to be placed on fabric exceeds 18 inches, the fabric shall be protected during the placement of the rock by a layer of bedding material. The bedding material shall be spread uniformly on the fabric to a depth of 4 inches and shall be free of mounds, dips or windrows. Compaction of the bedding material will not be required.

Rock shall be carefully placed on the bedding material and fabric in such a manner as not to damage the fabric. If, in the opinion of the Engineer, the fabric is damaged or displaced to the extent that it cannot function as intended, the contractor shall remove the rock, regrade the area if necessary, and replace the fabric.

(B) Dumped Riprap:

The rock shall be placed to its specified thickness in one operation and in a manner which will produce a reasonably well graded mass with a minimum amount of voids and with the larger rock evenly distributed throughout the mass.

No method of placing the rock that will cause segregation will be allowed. Hand placing or rearranging of individual rock may be necessary to obtain the specified results.

(C) Wire Tied Riprap:

After installation of the lower portion of the wire mesh, rock shall be placed in accordance with the requirements of Subsection 913-3.01(B) of the specifications.

After placement of the rock, the upper portion of the wire mesh shall be placed, laced, and tied in accordance with the details shown on the plans.

(D) Grouted Riprap:

Rock for grouted riprap shall be placed in accordance with the requirements of Subsection 913-3.01(B). The stones shall be thoroughly moistened and any excess of fines shall be sluiced to the underside of the stone blanket before grouting.

The grout may be delivered to the place of final deposit by any means that will ensure uniformity and prevent segregation of the grout. If penetration of grout is not obtained by gravity flow into the interstices, the grout shall be spaded or rodded to completely fill the voids in the stone blanket. Pressure grouting shall not unseat the stones, and during placing by this method, the grout shall be spaded or rodded into the voids.

Penetration of the grout shall be to the depth specified on the plans. When a rough surface is specified, stones shall be brushed until 25 to 50 percent of the depth of the maximum size stone is exposed. For a smooth surface, grout shall fill the interstices to within 1/2 inch of the surface.

Grout shall not be placed when the descending air temperature falls below 40 degrees Fahrenheit nor until the ascending air temperature rises above 35 degrees Fahrenheit. Temperatures shall be taken in the shade away from artificial heat.

Curing of the grout shall be in accordance with the requirements of Subsection 912-3.09 of the specifications.

The contractor may use shotcrete conforming to the requirements of Section 912 of the specifications in lieu of grout.

(E) Slope Mattress Riprap:

The mattress bed shall be excavated to the width, line and grade as shown on the plans. The mattress shall be founded on this bed and laid to the lines and dimensions required.

Excavation for toe or cut-off walls shall be made to the neat lines of the wall.

Mattresses shall be fabricated in such a manner that the sides, ends, lid and diaphragms can be assembled at the construction site into rectangular units of the specified sizes. Mattresses are to be of single unit construction, the base, ends and sides either to be woven into a single unit or one edge of these members connected to the base section of the unit in such a manner that strength and flexibility at the point of connection is at least equal to that of the mesh.

All perimeter edges of the mattresses are to be securely selvaged or bound so that the joints formed by tying the selvages have at least the same strength as the body of the mesh.

Mattresses shall be placed to conform to the details shown on the plans. Stones shall be placed in close contact within the unit so that maximum fill is obtained. The units may be filled by machine with sufficient hand work to accomplish the requirements of this specification.

Broken concrete shall not be used in slope mattresses.

Before the mattress units are filled, the longitudinal and lateral edge surfaces of adjoining units shall be tightly connected by means of wire ties placed every four inches or by a spiral tie having a complete loop every four inches. The lid edges of each unit shall be connected in a similar manner to adjacent units. The slope mattress shall be anchored as shown on the plans. Each anchor stake shall be fastened to the cover mesh with a tie wire.

(F) Gabions:

The gabion bed shall be excavated to the width, line and grade as shown on the plans. The gabions shall be founded on this bed and laid to the lines and dimensions required.

Excavation for toe or cut-off walls shall be made to the neat lines of the wall.

Gabions shall be fabricated in such a manner that the sides, ends, lid and diaphragms can be assembled at the construction site into rectangular units of the specified sizes. Gabions are to be of single unit construction, the base, ends and sides either to be woven into a single unit or one edge of these members connected to the base section of the unit in such a manner that strength and flexibility at the point of connection is at least equal to that of the mesh.

Where the length of the gabion exceeds its horizontal width, the gabion is to be equally divided by diaphragms, of the same mesh type as the body of the gabions, into cells whose length does not exceed the horizontal width. The gabion shall be furnished with the necessary diaphragms secured in proper position on the base section in such a manner that no additional tying at this juncture will be necessary.

All perimeter edges of gabions are to be securely selvaged or bound so that the joints formed by tying the selvages have at least the same strength as the body of the mesh.

Gabions shall be placed to conform to the details shown on the plans. Stones shall be placed in close contact in the unit so that maximum fill is obtained. The units may be filled by machine with sufficient hand work to accomplish requirements of this specification.

The exposed face or faces shall be hand-placed using selected stones to prevent bulging of the gabion cell and to improve appearance. Each cell shall be filled in three lifts.

Two connecting tie wires shall be placed as shown on the plans between each lift in each cell.

Care shall be taken to protect the vertical panels and diaphragms from being bent during filling operations.

The last lift of stones in each cell shall be level with the top of the gabion in order to properly close the lid and provide an even surface for the next course.

All gabion units shall be tied together each to its neighbor along all contacting edges in order to form a continuous connecting structure.

Empty gabions stacked on filled gabions shall be laced to the filled gabion at the front, side and back.

(G) Sacked Concrete Riprap:

The sacks shall be filled with concrete, loosely packed so as to leave room for folding or tying at the top. Approximately one cubic foot of concrete shall be placed in each sack. Immediately after filling, the sacks shall be placed according to the details shown on the plans and lightly trampled to cause them to conform with the earth face and to adjacent sacks in place.

The first two courses shall provide a foundation of double thickness. The first foundation course shall consist of a double row of stretchers laid level and adjacent to each other in a neatly trimmed trench. The trench shall be cut back into the slope a sufficient distance to

enable proper subsequent placement of the riprap. The second foundation course shall consist of a row of headers placed directly above the double row of stretchers. The third and remaining courses shall consist of a double row of stretchers and shall be placed in such a manner that joints in succeeding courses are staggered.

All dirt and debris shall be removed from the top of the sacks before the next course is laid thereon. Stretchers shall be placed so that the folded ends will not be adjacent. Headers shall be placed with the folds toward the earth face. Not more than four vertical courses of sacks shall be placed in any tier until initial set has taken place in the first course of any such tier.

When there will not be proper bearing or bond for the concrete because of delays in placing succeeding layers of sacks, a small trench shall be excavated back of the row of sacks already in place, and the trench shall be filled with fresh concrete before the next layer of sacks is laid. The size of the trench and the concrete used for this purpose shall be approved by the Engineer. The Engineer may require header courses at any level to provide additional stability to the riprap.

Sacked concrete riprap shall be cured by being covered with a blanket of wet earth or by being sprinkled with a fine spray of water every two hours during the daytime for a period of four days.

(H) Rail Bank Protection:

Excavation, where required for rock fill, shall be performed in reasonably close conformity to the lines and grades established or shown on the plans.

Rails shall be driven at the locations and to the minimum penetrations shown on the plans. Driving equipment shall be capable of developing sufficient energy to drive the rails to the specified minimum penetration and be approved by the Engineer.

If hard material is encountered during driving before minimum penetration is reached and it has been demonstrated to the satisfaction of the Engineer that additional attempts at driving would result in damage to the rails, the Engineer may order additional work to be performed, such as jetting or drilling, in order that minimum penetration may be obtained or the Engineer may order the minimum penetration to be reduced as required by the conditions encountered.

Wire fabric shall be securely fastened to the rails, placed in the trenches and laid on the slopes. The rock backfill shall then be carefully placed so as not to displace the wire fabric or rails. The wire fabric shall entirely enclose the rock backfill.

The completed rock fill shall be backfilled as necessary and the waste material disposed of as directed by the Engineer.

913-3.02 Soil-Cement Bank Protection:

Soil-cement bank protection construction shall include excavating, backfilling, and grading the wash bed and banks to the lines, grades and cross sections shown on the plans or established

by the Engineer; furnishing and mixing aggregate, cement, fly ash and water; and spreading, compacting, and curing the mixture.

The contractor shall investigate for ground water as soon as possible. If there is a need for dewatering, the contractor shall provide to the Engineer for review a comprehensive dewatering plan a minimum of two weeks before construction starts. The dewatering plan shall address any water quality requirements of the Corps of Engineers permit and ADEQ certification. Dewatering activities shall not begin until the Engineer has approved the plan.

The dewatering shall comply with all laws and permit requirements.

If changes to the approved dewatering plan are required, the contractor shall submit a revised plan to the Engineer for approval.

For soil-cement bank protection, the contractor shall be responsible for quality control as necessary to meet the requirements established herein. The contractor shall monitor the complete mix during construction of soil-cement, including the amounts of cement and fly ash used.

(A) Required Contractor Submittals:

Two weeks prior to the start of the soil-cement bank protection construction, the contractor shall submit in writing to the Engineer for approval, the following items:

- (1) The type of spreading and compaction equipment to be used.
- (2) The number and type of watering equipment to be used.
- (3) The method used to keep surfaces continuously moist until subsequent layers of soil-cement are placed.
- (4) The method used to cure permanently exposed surfaces.
- (5) The proposed source of soil-aggregate.
- (6) The proposed source(s) of Portland cement and fly ash (if used).
- (7) The approximate length of soil-cement bank protection or area of soil-cement to be placed each day prior to starting placement and compaction operations, on a daily basis.
- (8) The soil-cement mix design.

Such submittals shall not relieve the contractor of the responsibility for achieving the desired result of constructing sound soil-cement, free from defects, according to the specifications and plans, or as directed by the Engineer. Changes in the source(s) of cement or fly ash will not be permitted without the prior approval of the Engineer.

(B) Preparation of Subgrade:

Before placement of the soil-cement, the area to be treated shall be graded and shaped to the lines and grades as shown on the plans. The subgrade shall be compacted to a minimum of 95 percent of the maximum dry density determined in accordance with Arizona Test Method 225. The subgrade shall be compacted at a moisture content within two percentage points of the optimum moisture content determined in accordance with Arizona Test Method 225.

When the embankment material is composed predominantly of rock such that these compaction control procedures will not indicate the density achieved, the Engineer will determine the amount of compaction required and the adequacy of equipment used in obtaining the required compaction. Immediately prior to placement of the soil-cement mixture, the subgrade within the lines and grades of the plans shall be moistened and any soft or yielding subgrade shall be corrected and made stable before construction proceeds in accordance with requirements of Subsection 203-5.03(A) of the specifications. Any additional subgrade reparations required outside of the lines and grades shown on the plans, as determined by the Engineer, shall be repaired by the contractor and paid for by Force Account.

(C) Mixing Plant:

Aggregate and cementitious materials for the soil-cement shall be proportioned and mixed in a central mixing plant. The mixing plant shall be either of the batch-mixing type using revolving blade, rotary drum mixers, or of the continuous mixing type using a stationary twin shaft pug mill mixer. The aggregate, fly ash, and cement shall be proportioned by weight. The mixing plant shall be designed, coordinated, and operated to produce a soil-cement mixture of the proportions specified within required tolerances.

If the soil-cement temperatures measured at the mixer are 85 degrees Fahrenheit or less, the placing and compaction shall be completed within 1-1/2 hours of the batch time. If soil-cement temperatures measured at the mixer are greater than 85 degrees Fahrenheit but less than 96 degrees Fahrenheit, placing and compaction shall be completed within 1 hour of the batch time. If soil-cement temperatures are 96 degrees Fahrenheit or greater when measured at the mixer, the contractor shall take immediate steps to lower the batch plant mix temperature to 95 degrees Fahrenheit or below, and follow the above time limits as mix temperature dictates, prior to further placement and compaction of soil-cement materials.

The water shall be proportioned by weight or volume and there shall be means by which the Engineer may readily verify the amount of water utilized per batch or the rate of water flow utilized for continuous mixing.

(1) Measuring Devices:

The mixing plant shall record the quantity of the material, shall have a digital readout, and shall provide daily printed record such that the total discharged quantity per hour and the cumulative total quantity are displayed.

Measuring devices shall be calibrated and approved by the Engineer.

Each weight measuring device shall be calibrated to an accuracy of 0.2 percent and shall be inspected and calibrated as often as the Engineer deems necessary to assure their accuracy.

Each volume measuring device shall be calibrated to an accuracy of ± 1.5 percent and shall be inspected and calibrated as often as the Engineer deems necessary to assure their accuracy.

(2) Batch Mixing:

The mixer shall be equipped with a sufficient number of paddles of a type and arrangement to produce a uniformly mixed batch. The mixer shall be equipped with a timing device which will indicate, by a definite audible or visual signal, the expiration of the mixing period. The device shall be accurate to within two seconds. The allowable tolerance for weight batching of aggregates and cementitious material shall be two percent and 0.5 percent, respectively, for each batch.

The batch mixing plants shall provide sampling facilities which are satisfactory to the Engineer and which allow representative samples of the soil-aggregate mixture prior to the addition of water and cementitious material to be obtained easily and safely. Samples of the soil-aggregate will be taken at this point to determine conformance to the gradation and plasticity requirements listed in Subsection 913-2.02(B) of the specifications.

(3) Continuous Mixing:

Aggregates shall be drawn from the storage facility by a feeder or feeders which will continuously supply the correct amount of soil-aggregate in proportion to the cementitious material.

A control system shall be provided that will automatically close down the plant when material in any storage facility approaches the strike off capacity of the feed gate. The plant will not be permitted to operate unless this automatic control system is in good working condition. The feeder for the soil-aggregate shall be mechanically or electrically driven.

Continuous mix plants shall provide sampling facilities which are satisfactory to the Engineer and which allow representative samples of the soil-aggregate mixture prior to the addition of water and cementitious material to be obtained easily and safely. Samples of the soil-aggregate will be taken at this point to determine conformance to the gradation and plasticity requirements listed in Subsection 913-2.02(B) of the specifications.

(4) Blending of Cement and Fly Ash:

The blending procedure shall be sufficient to provide a uniform, thorough, and consistent blend of cement and fly ash. The blending method and operation shall be approved by the Engineer prior to the commencement of soil-cement production. During blending of the cementitious materials, the percent of fly ash content shall not vary by more than ± 0.5 percent of the content approved by the Engineer.

Weight measuring devices are required at both the cement and fly ash feeds. At the direction of the Engineer, an additional measuring device may also be required when the cement and

fly ash are pre-blended at the site. In the production of the soil-cement mixture, the percent of cementitious material shall not vary by more than ± 0.5 percent of the contents approved by the Engineer.

Silos and feeders shall be equipped and operated so as to provide uniform rates of feed and prevent caking. The charge in the batch mixer or rate of feed to the continuous mixer shall not exceed that which will permit complete mixing of all the mix material. Provisions shall be made to allow for ready sampling of the cementitious materials.

(D) Transporting, Spreading, and Compaction:

The soil-cement mixture shall be transported from the mixing plant to the construction site in clean hauling equipment vehicles outfitted with suitable covers to protect the mixture in unfavorable weather.

Spreading of the soil-cement mixture shall be accomplished using equipment that will produce uniform layers of the width and thickness necessary to provide for adequate compaction in conformance with the required dimensions shown on the plans for completed soil-cement layers. Where the soil-cement is to be placed in confined areas, the lifts may be spread by other methods as approved by the Engineer.

The layers of soil-cement shall not exceed 12 inches after compaction, or be less than four inches thick after compaction, unless the contractor can demonstrate the ability to place thicker layers with the equipment being utilized in the control strip. If potholing is performed to allow testing of each lift, the recompacted material used to repair the pothole shall also be tested and meet the requirements of this specification. Each successive layer shall be placed as soon as practicable after the preceding layer is completed, and approved by the Engineer. The maximum depth of compacted soil-cement that shall be placed per day in each location is four feet, unless approved by the Engineer.

Prior to spreading new material on a previously compacted lift which has cured for more than 1-1/2 hours, or if the surface has dried due to temperature and/or wind effects, scarification of the lift shall be performed parallel with the direction of placement using equipment approved by the Engineer. The scarification shall be performed to a depth of at least two inches, spaced between 18 and 24 inches. The Engineer may waive requirements for scarification if compaction is performed by means which provide an appropriate surface for bonding with the subsequent layer.

All construction equipment, including water spray trucks, shall be restricted from entering scarified surface areas during the interim between spreading and compaction operations.

If the surface cannot be scarified, the surface shall have cement grout slurry applied to ensure a proper bonding between lifts. The cement slurry shall have a water/cement ratio between 0.70 and 0.80 and be approved for use by the Engineer prior to placement of any additional soil-cement mixture.

All soil-cement surfaces that will be in contact with succeeding layers of soil-cement shall be kept continuously moist by fog spraying until placement of the subsequent layer, provided that the contractor will not be required to keep such surfaces continuously moist for a period longer

than seven days. Mixing and placing shall not proceed when the soil-aggregate or the area on which the soil-cement is to be placed is frozen. Soil-cement shall be mixed and placed when the air is at least 40 degrees Fahrenheit and rising.

(E) Monitoring Moisture Content in the Field:

Control of water content by the contractor in the field shall be accomplished in two ways:

- (1) The moisture-density relationship for the soil-cement mixture shall be determined in accordance with Arizona Test Method 221 on a routine basis, or when any significant gradation shift or rock content change occurs.
- (2) The actual moisture content of the mixture at the time of compaction, or shortly thereafter, shall be determined in accordance with Arizona Test Method 235 to determine if the optimum moisture content as determined by Arizona Test Method 221 is being maintained. The water content in the soil-cement mixture is to be continuously monitored, and the mixing water shall be adjusted at the plant as necessary to achieve the compressive strength and compaction requirements specified herein.

(F) Quality Control Compaction Testing:

Soil-cement shall be uniformly compacted to a minimum of 98 percent of the maximum dry density determined in accordance with Arizona Test Method 221. A running average of five consecutive in place density tests shall not be less than 100 percent of maximum density as monitored by nuclear density tests in accordance with Arizona Test Method 235. Compaction shall be performed within 2 percentage points of the optimum moisture content as determined in accordance with Arizona Test Method 221. Quality control density and moisture tests shall be performed in accordance with Arizona Test Method 235 at a minimum frequency as specified in table 4:

Table 4	
Quality Control Minimum Requirements for Compaction	
Moisture/Density	1 test / 500 sy/lift

(G) Control Strips:

A control strip shall be constructed at the beginning of work on the soil-cement to be compacted. The control strip construction shall be required to establish equipment and procedures required to attain densities for the specified course.

Each control strip, constructed to acceptable density and surface tolerances shall remain in place and become a section of the completed embankment. Once control strip is complete and accepted, production may begin on the same shift for the remainder of project.

Unacceptable control strips shall be corrected or removed and replaced at the contractor's expense. A control strip shall have an area of approximately 100 square yards and shall be of the same depth specified for the construction of the course which it represents.

The materials used in the construction of the control strip shall conform to the specification requirements. They shall be furnished from the same source and shall be of the same type used in the remainder of the course represented by the control strip. The underlying surface upon which a control strip is to be constructed shall have prior approval of the Engineer.

The equipment used in the construction of the control strip shall be approved by the Engineer and shall be of the same type and weight to be used on the remainder of the course represented by the control strip.

Compaction of control strips shall commence immediately after the course has been placed to the specified thickness, and shall be continuous and uniform over the entire surface. Compaction of the control strip shall be continued until no discernable increase in density can be obtained by additional compaction effort.

Upon completion of the compaction, the mean density of the control strip will be determined by averaging the results of ten nuclear density tests taken at randomly selected sites within the control strip.

If the mean density of the control strip is less than 100 percent of the density of laboratory compacted specimens as determined by testing procedures appropriate for the material being placed, the Engineer may order the construction of another control strip.

A new control strip may also be ordered by the Engineer or requested by the contractor when:

- (1) A change in the material or mix design is made.
- (2) A control strip density is not representative of the material being placed.

(H) Power Tampers and Small Vibratory Rollers:

Small vibratory rollers which are capable of operating within 6 inches of a vertical face shall be used for compaction adjacent to the guide banks, next to the utilities and drainage conduit; at transitions to constructed levee protection, and at other areas where larger vibratory rollers cannot maneuver. The amount of rolling and tamping required shall be whatever is necessary for the particular equipment to provide the same degree of compaction as would be attained with larger self-propelled vibratory rollers. Standby replacement equipment shall be available within 1 hour if needed.

(I) Finishing/Trimming:

After compaction, the soil-cement shall be further shaped, if necessary, to the required lines, grades, and cross-sections and rolled to a reasonably smooth surface. Shaping of the face of the soil-cement bank protection shall be conducted daily at the completion of each day's production.

The exposed face of the soil-cement bank protection shall be trimmed to a neat line as shown on the plans. The resulting soil-cement bank protection width shall not be less than 8 feet after trimming unless specified on the plans.

(J) Curing:

Whenever the atmospheric temperatures are expected to drop below 30 degree Fahrenheit, the soil-cement shall be protected from freezing for seven days, after its construction by a covering of straw, earth, or other suitable material approved by the Engineer.

Temporarily exposed surfaces shall be kept moist as previously set forth. Care must be exercised to ensure that no curing material other than water is applied to the soil-cement surface that will be in contact with succeeding layers.

Permanently exposed surfaces shall be kept in a moist condition for seven days, or they may be covered with bituminous curing material, subject to the Engineer's approval. Any damage to the protective covering within seven days shall be repaired to the satisfaction of the Engineer at no additional cost to the Department.

Regardless of the curing material used, the permanently exposed surfaces shall be kept moist until the protective cover is applied. Such protective cover is to be applied as soon as practicable, with a maximum time limit of 24 hours between the finishing of the surface and the application of the protective cover or membrane.

(K) Backfill:

Backfill shall not be placed against the soil-cement until the contractor has achieved the compaction requirement.

(L) Maintenance:

The contractor shall maintain and protect the soil-cement in good condition until all work is completed and accepted. Maintenance shall include immediate repairs of any defects that may occur. This work shall be done at no cost to the Department and repeated as often as necessary. Faulty work shall be replaced for the full depth of the layer. The contractor shall take all necessary precautions to avoid damage to the completed soil-cement by equipment, and to avoid the deposition of raw earth or foreign materials between layers of soil-cement. Where ramps are constructed over soil-cement layers which are not to grade, all foreign materials and the uppermost one inch of the previously placed soil-cement mixture must be removed prior to continuation of the soil-cement construction.

(M) Construction Joints:

Construction joints are to be provided at the end of each day's work or when work is to be halted for 90 minutes or more. The joints shall be trimmed to a 15 degree minimum skew, transverse construction joint shall be formed by cutting back into the completed work to form a vertical face to the full depth of the previous lift. Before resuming placement of new material, the joints shall be roughened and loose material shall be removed by power broom.

(N) Acceptance of Soil-Cement:

The Engineer will cast, transport, cure, and test specimens in accordance with Arizona Test Method 241 for each 1,500 cubic yards of soil cement placed. Three cylinders will be tested

at seven days. The average compressive strength of the three cylinders shall achieve a minimum compressive strength of 750 psi.

Any early strength testing for the purpose of correlating seven day strength results to provide an early indicator of potentially low strength material shall be the responsibility of the contractor.

913-4 Method of Measurement:

Riprap, except gabions and sacked concrete, will be measured by the cubic yard of protection constructed by computing the surface area measured parallel to the protection surface and the total thickness of the riprap measured normal to the protection surface.

Riprap (gabions) will be measured by the cubic yard by computing the volume of the rock-filled wire baskets used.

Riprap (sacked concrete) will be measured by the cubic yard of concrete placed in the completed work. The measurement will be based on mixer volumes.

Rail bank protection will be measured by the linear foot. Measurement will be made from top of rail to top of rail (longest rail where rails of two or more lengths are used) and the distance measured will be from end rail to end rail.

Where two parallel rows of vertical rails are used, the measurement for payment will be the average of the distance along the two rows. Rail bank protection will be measured along the bank protection control line from end rail to end rail.

Soil-cement will be measured per cubic yard of soil-cement furnished and placed per the specified lines, grades, and cross-sections shown on the plans.

913-5 Basis of Payment:

The accepted quantities of riprap and rail bank protection, measured as provided above, will be paid for at the contract unit price per cubic yard or linear foot, which price shall be full compensation for the work, complete in place, including excavation; preparing the ground area; furnishing and installing the rock, filter fabric, bedding material, metal items, concrete, sacks and grout; and backfilling as required.

Materials, labor and equipment necessary to perform additional work such as jetting or drilling, as specified under Subsection 913-3.01(H) of the specifications, will be paid for in accordance with the provisions of Subsection 109.04 of the specifications.

The accepted quantities of soil-cement, measured as provided above, will be paid for at the contract unit price per cubic yard of soil-cement bank protection. Such payment shall constitute full reimbursement for all work necessary to complete the soil-cement bank protection including:

- (1) Surface Preparation;
- (2) Providing and Stockpiling Soil-Aggregate;

- (3) Cementitious Material, Watering, Mixing;
- (4) Placing;
- (5) Compacting;
- (6) Shaping and Finishing;
- (7) Curing;
- (8) Quality Control Testing; and
- (9) Other Incidental Operations.

Any waste and non-compacted soil-cement material not used on the final soil-cement bank protection will not be measured for payment.

Excavation and backfill associated with the soil-cement construction will be measured and paid under the Structural Excavation and Structure Backfill items respectively.

Construction of Gabion Mattress associated with the soil-cement work will be measured and paid under the Riprap (Gabion Mattress) item.

Payment for additional excavation, where determined by the Engineer to remove unsuitable material, per the requirements of Subsection 203-5.03(A) of the specifications, will be made in accordance with the provisions of Subsection 109.04 of the specifications.

Payment for Dewatering will be made on a Force Account basis in accordance with the requirements of Subsection 109.04 of the specifications.

ITEM 9130001 RIPRAP (DUMPED):

Description:

The work under this item shall consist of installing dumped riprap at the locations as shown on the project plans and as specified herein.

Materials:

The riprap shall conform to the requirements of Subsection 913-2.01(A) of the specifications.

The high survivability filter fabric shall conform to the requirements of Subsection 1014-4 of the specifications.

Construction Requirements:

The riprap shall be installed in accordance with Subsection 913-3.01(B) of the specifications.

The high survivability filter fabric shall be installed in accordance with Subsection 913-3.01(A) of the specifications.

Method of Measurement:

Riprap (Dumped) will be measured on a cubic yard basis.

Basis of Payment:

The accepted quantities for Riprap (Dumped), measured as provided above, will be paid at the contract unit price per cubic yard, which price shall be full compensation for the work, complete in place.

(923OJTNGL,06/18/26)

SECTION 923 BLANK: the title and text of the Standard Specifications is revised to read:

SECTION 923 ON-THE-JOB TRAINING WITHOUT GOALS:

923-1 Description:

The contractor may provide On-The-Job training (OJT) aimed at moving minorities, women, and disadvantaged trainees into journeymen in various types of construction trades or job classifications in accordance with 23 CFR Part 230, Part 230.111 and Part 230, Appendix B.

It is the intention of these Special Provisions that training be provided in the construction classifications/crafts rather than for office support positions. Some off-site training is permissible as long as the training is an integral part of an approved training program and does not comprise of a significant part of the overall training.

923-1.01 General:

Training and upgrading of minorities and women toward journeyman status is the primary objective of these Special Provisions. Accordingly, the contractor shall make every effort to enroll minority, women, and disadvantaged trainees (e.g., by conducting systematic and direct recruitment through public and private sources likely to yield minority and women trainees) to the extent that such persons are available within a reasonable area of recruitment. The contractor will be responsible for demonstrating the steps that it has taken in pursuance thereof, prior to a determination as to whether the contractor is in compliance with these Special Provisions. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. Trainees shall be distributed among the work classifications on the basis of the contractor's needs and the availability of journeymen in the various classifications within a reasonable area of recruitment. The ratio of apprentices and OJT Trainees to journeymen shall not be greater than permitted by the terms of the approved training program being utilized.

No employee shall be employed as a trainee in a classification in which they have successfully completed a training course leading to journeyman status, or in which they have been employed as a journeyman. The contractor shall satisfy this requirement by including appropriate questions in the employment application or by other suitable means. The contractor shall maintain documentation that shows the employee's work and training history.

923-1.02 Definitions:

Banking-Carryover Hours:

OJT hours completed by a trainee are eligible to be credited to a future project. Banked-Carryover hours will only be credited when the same trainee that completed the excess hours is used on the future project.

Classification/Craft:

Type of occupational category, trade, or job being done by a trainee on a federal-aid funded highway construction project.

Disadvantaged Persons:

A person who meets one of the following:

- (1) Receives, or is a member of a family and/or household, which receives cash payments under a Federal, State, or local income-based public assistance program;
- (2) Is a member of a family and/or household that receives (or has been determined within the 6-month period prior to registration for the program involved to be eligible to receive) Food Stamps/EBT card under the Food Stamp Act of 1977;
- (3) Is a foster child on behalf of whom State or local government payments are made;
- (4) Does not have a high school diploma or GED; or
- (5) Is from a family whose total annual household income is below the federal poverty limits.

Journeyman:

A person who is capable of performing all the duties within a given job classification or craft.

OJT Trainee:

A person who is:

- (1) A minority, woman, or disadvantaged individual enrolled in an approved training program; or
- (2) Any other individual enrolled in an approved training program, whose training hours are, approved by the Department, and can be credited as OJT hours.

Small Business and Workforce Development (SBWD):

SBWD is responsible for oversight of the OJT program, which targets under-represented segments of the U.S. workforce, including minorities, women and disadvantaged individuals. SBWD assesses OJT hour goals on contracts and monitors them to ensure that trainees receive the required number of training hours

923-1.03 Computation of Time:

In computing any period of time described in this OJT special provision, the day from which the period begins to run is not counted, and when the last day of the period is a Saturday, Sunday or Federal or State holiday, the period extends to the next day that is not a Saturday, Sunday, or Federal or State holiday. In circumstances where the Department's offices are closed for all or part of the last day, the period extends to the next day on which Department's offices are open.

923-1.04 OJT Training Programs:

The minimum length and type of training for each classification will be established in the training program selected by the contractor and approved by the Department and FHWA. The Department and FHWA will approve a program if it is reasonably calculated to meet equal employment opportunity obligations and qualifies the average trainee for journeyman status in the classification concerned by the end of the training period as defined in the training program.

The Department recognizes the following OJT Training programs:

- (A) OJT Programs approved by FHWA or the Department of Labor (DOL) prior to the start of the trainee commencing work.
- (B) Registered union or other approved apprenticeship programs registered with the Bureau of Apprenticeship, U.S. DOL, Employment and Training Administration, Bureau of Apprenticeship and Training or the Arizona Apprenticeship Office, Arizona Department of Economic Security programs recognized by the Bureau.

Approval of a training program other than those specified above to be used for the contract must be approved by the Department or FHWA prior to the trainee commencing work on the classification covered by the program. Contractors intending to submit a training program for approval prior to the start of a contract must submit the program as soon as possible after notification of contract award as approval of a training program may take up to four weeks. Several FHWA approved training program templates for specified classifications are available on the SBWD website.

The contractor shall furnish each trainee with a copy of the Training Program the trainee is enrolled in, and other documentation related to the training program. The contractor shall provide training that develops the skills outlined in the training program. Multiple OJT training programs can be used on the project.

All training programs shall be administered in a manner consistent with the equal employment obligations of federal-aid highway construction contracts. The Department reserves the right to request documentation that the contractor's training program fulfills these obligations.

The trainee will be paid the appropriate trainee Davis-Bacon wage rates for training classifications/crafts on federally-funded projects. The contractor shall compensate trainees not less than the rate outlined in the approved training program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination.

The contractor shall provide for the maintenance of records and furnish/submit required information and reports documenting its performance under these Special Provisions. Such records shall be available at reasonable times and places for inspection or review by the Department and FHWA.

923-1.05 OJT Liaison:

The contractor shall designate an OJT Liaison who shall be responsible for monitoring and administering the contractor's OJT Program and monitoring the trainees' progress. The OJT Liaison may have other responsibilities for the contractor. The OJT Liaison shall serve as the point of contact for the Department regarding information, documentation, and conflict resolution relating to the contractor's OJT program.

923-2 Online Resources:

OJT System Website:

<https://adot.dbesystem.com>

SBWD Website:

<https://azdot.gov/business/small-business-and-workforce-development>

923-3 Requirements:

923-3.01 Documentation:

Documentation related to OJT training can be found on the Department's SBWD website. The contractor shall complete and submit the following information to the Department:

(A) OJT Enrollment and Progression:

(1) OJT Enrollment:

OJT Enrollment information shall be submitted through the Department's online OJT System by the contractor at least 5 days prior to a trainee's start date. OJT Enrollment information shall be completed and includes the trainee's name and address, employment status, gender and ethnicity, training program (s), and classification/craft.

SBWD will review the OJT Enrollment information within 5 days, and if approved, hours will be retroactively credited to the date the OJT Enrollment information is received by SBWD.

To receive OJT credit, apprentice's current apprentice certificate or proof of registration from a union or approved apprenticeship program shall be uploaded into LCPtracker by the contractor within 5 days of the apprentice's start date, in addition to completing the OJT enrollment information in the online OJT System.

If the Arizona Apprenticeship Office Representative's signature is missing from the apprentice certificate, the contractor shall also upload the apprentice's US Department of Labor, Office of Apprenticeship Certificate to LCPtracker. The contractor shall not receive training credit or reimbursement until the certificate is uploaded.

(2) Progression of Training and Change of Status:

Progression of Training-Level Up and Change of Status shall be submitted through the Department's online OJT System each time a trainee advances, progresses to another training level or milestone in his/her training program, or has a change of job classification. Hours will be retroactively credited to the date the information is received.

Hours that exceed the maximum indicated in the program for a certain level will not be credited. Once a level is completed, the trainee should be moved to the next level towards journeymen status.

923-3.02 Training Program Completion:

Once the trainee completes the required number of levels and hours of training for the same classification or craft, or completes an approved training program, the trainee is considered to have completed the training program it is enrolled under. The contractor shall not receive OJT credit for hours exceeding the maximum number of training hours required for completion of the selected training program.

Once a trainee completes a specific training level for a classification or craft, the contractor shall not be permitted to submit that trainee for enrollment or reimbursement at that same level within the same classification or craft, however the same trainee can be enrolled in a different classification or craft.

The contractor shall provide documentation showing the type and length of training satisfactorily completed to each trainee and the Department upon successful completion of a training program.

For an apprenticeship program, the Apprenticeship office will issue a certificate of completion in said craft, a DOL certificate, and a journeyman's card.

923-3.03 Banking-Carryover Hours:

At the completion of the project, the contractor may submit a Banking-Carryover Hours request in the Department's online OJT System, to carryover training hours for a specific trainee on the project to be used on a future project. Banked hours that are carried over to a

project may lower the required number of training hours the contractor is required to complete on that project. The trainee shall be placed on a subsequent project with the intent that the trainee is progressing towards completion of a training program. Banked hours cannot be transferred to other trainees. No additional payment will be paid for banked hours carried over to other projects.

923-3.04 OJT Project Completion and Banked Hours Request:

OJT Completion and Banked Hours documentation shall be submitted within 60 days of completion of training. Any hours to be banked shall be shown on the documentation.

923-4 Method of Measurement:

OJT training hours will be measured by the hour to the nearest half hour.

Measurement of hours will be made as the OJT trainee completes hours on the project. Hours are considered complete if the trainee performs hours on the project, is OJT enrolled, and provides required training by the program.

No measurement for payment will be made for trainee hours in which OJT enrollment information has not been received and approved by the Department.

923-5 Basis of Payment:

The accepted quantities of hours, measured as provided above, will be paid for at a unit price of \$3 per hour for training provided to trainee/apprentice in accordance with an approved training program.

Payment for offsite training may only be made when the contractor does one or more of the following and the trainees are concurrently employed on a federal-aid project;

- (A) Contributes to the cost of the training,
- (B) Provides the instruction to the trainee
- (C) Pays the trainee's wages during the offsite training period.

923-6 Monitoring:

(A) Monthly Reporting:

Contractors shall report monthly hours for each trainee in the online OJT System by the 15th of the month following the month of training hours completed.

(B) Site Visits:

The Department may conduct periodic monitoring site visits to the worksite to review OJT Program compliance, during working hours on the project. The Department will notify the OJT liaison at least 24 hours prior to a site visit if the OJT Liaison is required to be at the site visit.

The site reviews may include, among other activities, interview of trainees, the contractor, and its employees. The contractor shall cooperate in the review and make its employees available. The contractor's OJT Liaison shall be reasonably available to meet with Department staff as well as be available to respond to periodic emails and phone calls from the Department to check on the progress of OJT Trainees. The Department will make efforts to ensure minimal disruption to the work and coordinate site visit times with other Department divisions, as applicable (for example, Davis-Bacon interviews).

(924CQC, 09/17/20)

ITEM 9240170 CONTRACTOR QUALITY CONTROL:

Description:

The work under this item shall consist of furnishing all personnel, materials, supplies, facilities and equipment necessary to perform all certification of test equipment, sampling, testing, and other control actions. The work shall also include the preparation of linear control charts, Weekly Quality Control Reports, and other reports and records as described in Subsection 106.04(C) of the Specifications.

Method of Measurement:

Contractor quality control will be measured for payment on a lump sum basis as a single unit of work.

Basis of Payment:

(A) General:

The accepted quantities of contractor quality control, measured as provided above, will be paid at the contract lump sum price, which price shall be full compensation for the work, complete, as described and specified herein.

Partial payments under this item will be made in accordance with the following provisions:

- (1) The first partial payment price will be the lesser of 25 percent of the contract lump sum price for contractor quality control, or 1 percent of the original total contract bid amount.
- (2) The remaining portion of the lump sum price will be prorated over the duration of the original contract on a monthly basis, and monthly progress payments will be made.

If adjustments to pay items covered under Contractor Quality Control are approved by supplemental agreement, an equitable adjustment to the lump sum amount for Contractor Quality Control may be made. Any adjustment to Contractor Quality Control shall be included in the supplemental agreement and the adjusted amount, less previous payments, will be prorated equally over the remaining contract period, including any related time extensions.

(B) Delinquent Reports:

Failure of the contractor to submit complete and accurate Weekly Quality Control Reports, current to the most recent Wednesday submittal date, will be grounds for the Engineer to deduct monies from the contractor's progress payment.

For each Weekly Quality Control Report that is not complete and accurate, and not submitted to the Engineer by the Wednesday submittal date specified in Subsection 106.04(C)(6), the Department will deduct \$2,500.00 from the progress payment for the current month.

For each delinquent Weekly Quality Control Report submitted to the Engineer within 10 days, excluding weekends and holidays, of the original Wednesday due date, \$2,000.00 will be returned on the next regular estimate, provided all of the requirements specified herein and in Subsection 106.04(C)(6) have been met, and the report is complete and accurate. No deducted monies will be returned for reports submitted more than 10 days, excluding weekends and holidays, beyond the original Wednesday due date.

All deducted monies which are retained by the Department, as specified above, are liquidated damages.

ITEM 9240050 MISCELLANEOUS WORK (ELECTRICAL RECORD DRAWINGS):

Description:

The work under this item consists of preparing record drawing drawings of all installed electrical equipment as specified herein.

Materials:

A full-size set of project blue line drawings shall be kept on-site and updated on a weekly basis with a red pencil or red ink to reflect field adjustments, changes, omissions, additions, etc. as they occur on the project. The Engineer will provide the contractor with a full-size set of plan sheets for use in preparing final construction record drawings.

Construction Requirements:

Information shall be shown on these record drawing plan sheets in red ink, depicting the constructed dimensions, elevations, grades, and materials including locations of existing underground utilities found during construction. The contractor shall exercise care in handling the record drawing plan sheets and will return them to the Engineer in like condition. The Engineer will be the sole judge in determining whether the record drawings are acceptable. Testing results of power meter and OTDR shall be submitted for approval before submitting the Record Drawings. Work under this bid item includes transfer of all information noted by the contractor on the on-site record drawing set described above under this bid item.

The minimum requirements for construction record drawing acceptance are as follows:

(A) Project Drawing Quantity Notations:

A project drawing or quantity summary sheet that shows a quantity on it that is incorrect shall be corrected by drawing a neat line through the original quantity and writing in the correct information. When space on the drawing does not allow room to indicate the corrections, a separate table may be drawn on a separate sheet with reference on both plan sheets to the plan sheet that the table refers to or to the sheet where the table is located.

(B) Existing/New Utilities:

All underground infrastructure utilities, whether depicted on the Plans or not, shall be verified, corrected, or added to the record drawings noting the beginning and ending station/offset location and elevation of utility relative to finished roadway grade or other identifiable ground or permanent roadway/project feature.

(C) Conduit Placement:

All new and existing conduit within the project limits, whether depicted on the Plans or not, shall be verified, corrected, or added to the record drawings, noting what type of conduit and where the conduit run begins and ends. Underground conduit shall be dimensioned from edge of roadway with starting and ending point station numbers.

(D) Pull Boxes:

All new and existing traffic signal pull boxes within the project limits, whether depicted on the Plans or not, shall be verified, corrected, or added to the record drawings, noting what type of pull box and GPS coordinates accurate to within 1 foot or less. The contractor shall write a unique identification number on the record drawing drawings next to each pull box located as a part of this project. The contractor shall prepare and submit hard copies of a table that documents the pull box type, GPS coordinates, and ID number for all pull boxes located as part of this project.

Distance from pull box to pull box shall be dimensioned on record drawings.

(E) Splice Details:

All fiber optic splices that differ from those specified in the Plans shall be documented in the record drawings.

(F) Fiber Sequential Length:

All fiber distance markings at the ingress and egress of No. 9 pull boxes and equipment cabinets shall be recorded in a table that that references the pull boxes. Included in this table shall be the sequential distance markings of all cables entering and exiting each splice closure and the termination in the field equipment.

(G) Diagrams:

Changes to a diagram in the Plans (i.e. – communication block diagram) shall be documented in the record drawings.

Method of Measurement:

Miscellaneous Work (Electrical Record Drawings) will be measured on a lump sum basis.

Basis of Payment:

The accepted quantities of Miscellaneous Work (Electrical Record Drawings), measured as provided above, will be paid for at the contract lump sum price, which price shall be full compensation for the work, complete in place.

ITEM 9240129 MISCELLANEOUS WORK (ROADWAY OBLITERATION AND RESTORATION):

Description:

The work under this item shall consist of obliterating and restoring all existing abandoned roads and crossovers, turnouts, driveways, and construction access roads as shown on the project plans, as directed by the Engineer, and as specified herein.

Obliteration is defined as restoring the abandoned segments of roads to as near natural contours and conditions as possible or meeting current required cross-section by removing existing paving, roadway embankment and aggregate base material, forming natural, rounded slopes, regrading, adding fill material, seeding and/or planting, and providing conditions which allow natural revegetation of the areas.

Construction Requirements:

All abandoned roads, crossovers, turnouts, driveways and construction access roads shall be obliterated as shown on the project plans (Detail D – F0624). The existing pavement in areas to be obliterated shall be removed. Obliteration shall be by scarifying a minimum of 12 inches deep with ripper bars set a maximum of 2 feet apart on center. Care shall be taken to rip rather than plow the existing compacted areas and obliteration may be by regrading to restore the roadway to near natural contours and conditions.

The contractor shall take care to maintain the natural drainage channels so as not to alter existing flow patterns. The contractor shall not excavate the existing embankment of the existing southbound off – ramp below elevation 3762.5'. The contractor shall coordinate this work with the Engineer to ensure these objectives are met during the construction phase.

Upon completion of roadway obliteration, all areas shall be seeded in accordance with Section 805 of these specifications.

Method of Measurement:

Miscellaneous Work (Roadway Obliteration and Restoration) will be measured on a per square yard basis. All areas shown on Detail D of the plans are to be obliterated and re-contoured.

Basis of Payment:

The accepted quantities of Miscellaneous Work (Roadway Obliteration and Restoration), measured as provided above, will be paid for at the contract unit price per square yard, which price shall be full compensation for the work, complete in place.

Seeding of the obliterated and re-contoured areas shall be paid in accordance with Section 805 of these specifications.

- | | |
|---------------------|---|
| ITEM 9240181 | MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS) |
| | (MANUAL / MECHANICAL METHODS): |
| ITEM 9240182 | MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS) |
| | (HERBICIDE): |

Description:

The work under these items shall consist of surveying, as well as controlling noxious and invasive plant species manually / mechanically and/or with the application of herbicides, in the areas designated by the Engineer, and throughout the duration of the contract, as required in a Noxious Species Control Plan (NSCP) prepared by the contractor as specified herein. When noxious or invasive plant species are determined to be present within the project limits or all anticipated construction zones, the control procedures in the NSCP shall be implemented with the approved weed management measures achieved prior to earth moving activities of infested areas.

Weed control procedures in the NSCP shall also be implemented during all stages of construction and in advance of seeding. Control of Noxious Plants through herbicide methods shall be accomplished between fourteen (14) and twenty-one (21) calendar days prior to Clearing and Grubbing, as well as construction excavations. Control of Noxious Plants through manual / mechanical methods shall be accomplished within seven (7) calendar days prior to Clearing and Grubbing, as well as construction excavations. Repeated treatments shall resume after Clearing and Grubbing when noxious/invasive plants occur during construction. In addition, all construction-related equipment, materials, and personnel moving in and/or out of the project site shall be inspected and cleaned of noxious and invasive plant species (seeds, seed heads / pods) at no additional cost to the Department.

For projects that include Landscape Establishment, as specified in Section 807 of the specifications and these Special Provisions, control of noxious and invasive plant species will also be required throughout the Landscape Establishment phase, and shall be included in the contractor's NSCP.

The contractor shall conduct repeated applications for Control of Noxious Plants throughout the entire contract time including the Landscape Establishment phase when noxious/invasive plants occur. Successive treatments along with multiple mobilizations for Control of Noxious Plants shall be conducted in accordance with invasive weeds' growing seasons at no additional cost to the Department.

The control of plant species not on the State or Federal Noxious or Invasive lists – especially Forest Service Regional/BLM lists noted below will be paid only when control is directed by the Engineer based on the original or amended NSCP approved by an ADOT construction Professional Landscape Architect (PLA) licensed in the State of Arizona.

The areas to be designated by the Engineer for Control of Noxious Plants shall be coordinated with an ADOT construction PLA. Unless the project site presents sizable monocultures or pure stands of high-density noxious and invasive plant species, the contractor shall not perform broadcast applications of glyphosate and/or other broad spectrum non-selective herbicides within the project limits. Spot-treating of identified noxious and invasive plant species patches with appropriate selective herbicides shall be conducted.

For unpaved project areas that will ultimately be seeded with desirable native plant species, the contractor shall avoid persistent herbicide residues contamination in the soil. The application of plant growth regulator (PGR) herbicides including Pyridine Carboxylic Acid (PCA) herbicides, which do not break down easily, shall be approved by the Engineer in accordance with an ADOT construction PLA's evaluation. Soil sterilant herbicides, especially bare-ground herbicides with long-lasting Soil Persistence, shall be prohibited to use for all unpaved project areas that will be seeded. Soil sterilant herbicides including bare-ground herbicides shall be prohibited to use for all unpaved and/or unstabilized project areas that are prone to soil erosion and/or dust emission. Pre-emergence herbicides shall be prohibited to be used for unpaved project areas that will eventually be seeded.

All glyphosate, as well as formulations of glyphosate-based herbicides and/or such products under the brand name / trade name of Roundup shall be cautiously evaluated for use by an ADOT construction PLA and approved by the Engineer in accordance with environmental commitments, along with site specific concerns of sensitive biological resources for native species and habitats.

The selection of appropriate treatment method(s) between herbicide versus manual/mechanical or in combination shall be proposed by the contractor within NSCP and approved by an ADOT construction PLA through the Engineer consistent with type(s), life stage(s), growing season(s), and existing condition(s) of plant species, as well as environmental commitments. The contractor may apply the herbicide method to exterminate noxious plants first and remove the dead noxious plants by using the manual / mechanical method after herbicide treatment is successful. Clearing and Grubbing shall not be applied to remove the dead noxious/invasive plants, as well as contaminated soil seed bank if the method will spread the reproducible components of noxious/ invasive plants. Manual / mechanical method shall be applied instead. The reproducible components of noxious/ invasive plants shall include, but are not limited to roots, stems, seeds, seed heads, or seed pods according to various types and life stages of plant species.

Materials:

(A) General

The contractor shall accurately follow all applicable herbicide label requirements and prevent adverse environmental effects. The herbicides to be used and the methods of application shall conform to U. S. Environmental Protection Agency (EPA), Arizona Department of Agriculture, and/or Arizona Department of Environmental Quality (ADEQ) requirements, and the product's label instructions, as approved by the Engineer. If herbicides are to be applied to potential or delineated Waters of the US as defined under Section 404 of the Clean Water Act, the contractor shall file a Notice of Intent (NOI) and Notice of Termination (NOT) to EPA and/or ADEQ for compliance with the National Pollutant Discharge Elimination System (NPDES) Pesticide General Permit and/or Arizona Pollutant Discharge Elimination System (AZPDES) Pesticide General Permit (PGP).

All herbicides used on the project, including stump treatment herbicide(s), shall be in compliance with NPDES and/or AZPDES PGP(s). The PGP NOI(s) shall be filed for herbicide(s) utilized within the Ordinary High-Water Mark (OHWM) of Jurisdictional Waters of the U.S.

All materials to be used shall be listed and protocol information provided in the Noxious Species Control Plan, as specified below. The contractor shall provide the herbicides container with the original chemical label for inspection and confirmation of the chemicals used. All containers shall be disposed of as recommended by the manufacturer.

Herbicides proposed in the plan for use on projects within transportation easements on BLM and/or USFS Lands shall be in conformance with the following current environmental documents including: "Environmental Assessment for ADOT Herbicide Treatment Program on Bureau of Land Management Lands in Arizona", which is available at <https://eplanning.blm.gov/eplanning-ui/project/34810/510> or the "Environmental Assessment for Management of Noxious Weeds and Hazardous Vegetation on Public Roads on National Forest System Lands in Arizona" which is available at: <http://www.fs.usda.gov/main/r3/landmanagement/projects>. The Environmental Documents include a list of approved Herbicides, Mitigations and Best Management Practices (BMPs), which shall be included, as appropriate, by the contractor in the submitted NSCP.

Web links to environmental documents for noxious weeds and invasive plant species treatment for the six (6) National Forests within Arizona:

- (1) Final EIS (Environmental Impact Statement) and Record of Decision for Noxious Weed Treatment on the Coconino, Kaibab, and Prescott National Forests:
<http://www.fs.usda.gov/project/?project=30>
- (2) Coronado National Forest EA (Environmental Assessment) for Noxious Weed Treatments:
<http://www.fs.usda.gov/detail/coronado/landmanagement/resourcemanagement/?cid=stelprdb5123160>

- (3) Apache-Sitgreaves National Forest Integrated Forest-Wide Noxious Terrestrial and Aquatic Weed Management Plan:
<https://www.fs.usda.gov/project/?project=4967>
- (4) Tonto National Forest Integrated Treatment of Noxious and Invasive Weeds:
<https://www.fs.usda.gov/project/?project=4454>;

Additional information on invasive species requirements for the Tonto National Forest is available at:

http://www.fs.usda.gov/detail/tonto/landmanagement/resourcemanagement/?cid=fsbdev3_018789 .

Arizona Department of Agriculture NOXIOUS WEEDS (under the authority of Arizona Revised Statutes, Administrative Code R3-4-244 Regulated and Restricted Noxious Weeds, as well as R3-4-245 Prohibited Noxious Weeds) web link:

<https://agriculture.az.gov/pestspest-control/agriculture-pests/noxious-weeds>

Furthermore, the USDA Southwestern Region Weed Field Guides web link is accessible below:

<https://www.fs.usda.gov/detail/r3/forest-grasslandhealth/invasivespecies/?cid=stelprd3813522>

The USDA New Invaders of the Southwest is attainable within the web link below:

<https://docslib.org/doc/7815112/new-invaders-of-the-southwest>

The USDA Field Guide for Managing Buffelgrass in the Southwest is obtainable through the web link below:

https://www.fs.usda.gov/Internet/FSE_DOCUMENTS/fseprd563017.pdf

All materials used shall be in accordance with the approved NSCP and Pesticide Use Proposal (PUP).

Construction Requirements:

The contractor shall develop a NSCP for state and federal listed noxious and invasive plant species, and other undesirable plant species shown on the list posted on the Roadside Development web site (<https://azdot.gov/node/5372>), for approval by an ADOT construction PLA. Four (4) copies of the proposed NSCP in standard three (3) ring binders shall be submitted to the Engineer within seven (7) calendar days after the Execution of Contract. The ADOT construction PLA shall review and respond to the proposed NSCP within ten (10) calendar days upon receiving the submittal. If requested, additional copies may be submitted for review and comments by Native American Community governing body designated representative as approved by the Engineer. Native American Community governing body designated representative shall also review and comment the proposed NSCP within thirty (30) calendar days upon receiving the submittal. The contractor proposed NSCP shall include as minimum the following information applicable to the project area, location and conditions listed below:

- (1) A list of Noxious and Invasive Species and other Roadside Development approved plant species that would be anticipated for control based on existing vegetation and the project biotic communities. The weed species shall include but not be limited to the TABLE – I listed below:

TABLE – I	
Scientific Name	Common Name
<i>Bromus rubens</i> (syn. <i>Bromus madritensis</i> ssp. <i>rubens</i>)	Red Brome / Foxtail Chess / Foxtail Brome
<i>Baccharis sarothroides</i>	Desertbroom / Greasewood / Broom Baccharis / Rosin Bush
<i>Salsola kali</i> subsp. <i>tragus</i> (syn. <i>Salsola iberica</i>)	Russian Thistle / Tumbleweed

- (2) The methods of control of noxious and invasive plant species including herbicide stump treatment shall be determined based on the species present within the project limits prior to earth moving activities as well as subsequent project construction phases before seeding. Pre-emergent herbicide shall NOT be applied to all project seeding areas. The contractor shall provide information / methods on how the application of herbicides will NOT harm the expected desirable seed species germination and establishment as specified in Section 805 of these Special Provisions.
- (3) The proposed method(s) of control and extermination treatment between herbicide versus manual/mechanical or in combination to be utilized for each anticipated plant species suitable for the specific stage of plant development.
- (4) The herbicides, method and frequency of application, and rates to be used for each listed plant species.
- (5) Copies of herbicide and surfactant labels and Safety Data Sheet (SDS) for all chemicals proposed for use.
- (6) Procedure for collection, removal, containment, and disposal of noxious and invasive plants. All components of noxious and invasive plants such as roots, stems, leaves, flowers, seeds, seed heads, or seed pods shall be subject to collection, removal, containment, and disposal at no additional cost to the Department.
- (7) Methods and procedures to be followed to protect existing, transplanted, and new emerging vegetation in seeded areas.
- (8) Responsible Applicator and required Arizona Department of Agriculture Pest Management Division Licensing information, as specified in Section 806.
- (9) Record procedures to be followed to document control work completed.
- (10) Record procedures to be followed for reporting all chemicals used annually within transportation easements on BLM or USFS Lands within two (2) months

or September 30th of each calendar year (whichever is sooner) to an ADOT construction PLA.

- (11) Projects on transportation easements on BLM or USFS Lands shall include a completed Pesticide Use Proposal (PUP) form for all proposed herbicide uses prepared for submittal to the appropriate BLM Field Office or National Forest for approval. An example of a completed PUP for the project area will be provided to the contractor for use in preparing their PUP upon request to the ADOT construction PLA.
- (12) Projects on transportation easements within Native Americans (Tribal) Land shall include a completed PUP form for all proposed herbicide uses prepared for submittal to the appropriate representative of tribal government (governing body) for approval. An example of a completed PUP for the project area will be provided to the contractor for use in preparing their PUP upon request to the ADOT construction PLA.
- (13) When applicable, other information and explanations are required in the PUP or to implement the NSCP.
- (14) Process to be used for amending the NSCP to add additional plants or treatments that may be required as the project progresses.
- (15) A copy of the original Special Provisions for Control of Noxious Plants that the contractor bid on shall be attached to the NSCP.
- (16) Plans and methods to protect Threatened and Endangered Species in accordance with the Environmental Mitigations section of the contract documents.
- (17) Plans and methods for controlling of noxious/invasive plants in riparian and aquatic areas:
 - I Prevention of herbicide drifted by wind onto non-target native plants or nearby wetlands/watercourses by using low pressure systems and coarse-spray nozzles.
 - II Safe and effective use of herbicide chemicals labeled for the vicinity of wetlands/watercourses in prevention of water quality contamination.

The NSCP submitted to the Engineer shall not be implemented until it is approved by an ADOT construction PLA, and the contractor is so directed by the Engineer.

The contractor shall keep a copy of the approved NSCP and furnish the Engineer a copy of the approved NSCP for record keeping. The NSCP copy of the contractor and Engineer shall be maintained up to date with the contractor providing submittals of completed work activities within five (5) working days following completion of the work for each area directed by the Engineer for control. The NSCP shall be maintained up to date with submittals of the above completed NSCP information for the duration of the project.

The Engineer in consultation with an ADOT construction PLA shall designate/approve the location of the areas to be treated, and when required the frequency of treatment as per the NSCP. Payment will be made for the initial treatment of each area, whether with manual / mechanical methods or using herbicides, and for each subsequent treatment ordered and approved by the Engineer.

The contractor shall document the location and size of the project treatment areas, as well as noxious and invasive plant species that have been treated by the end of each working day. Furthermore, the contractor shall mark up the project layout plans (engineering drawings) with location and size of the project treatment areas, as well as noxious and invasive plant species that have been treated. Such documentation shall be submitted to an ADOT construction PLA for inspection/evaluation through the Engineer.

The contractor shall begin control of the designated areas within ten (10) working days of the Engineer's notice and complete the treatment within fifteen (15) working days of the notice approved by the Engineer.

If other plant species listed in the Arizona Noxious Weed List, the Forest Service Regional/BLM lists, or the ADOT Invasive and Noxious Plant Species Lists (available electronically at the following Roadside Development web address:

<https://apps.azdot.gov/files/roadway-engineering/roadside-dev/adot-invasive-noxious-plant-species-list-for-construction-projects.pdf>) occur within the project area that are not included in the NSCP, the contractor shall modify the Noxious Species Control Plan to add such species, including acceptable control measures and where applicable a PUP, and submit this information as an amendment of the NSCP to the Engineer and ADOT construction PLA for acceptance. No herbicide Control of Noxious Plants work shall be commenced on Federal lands until the PUP has been entirely completed and approved.

The project areas will be surveyed by an ADOT construction PLA, with the approval of the Engineer, prior to earthmoving activities and following rainfall events and during plant germination and growth periods for listed noxious and invasive plant species. To update NSCP, the contractor shall also furnish field inspection/observation reports for new growth of noxious/invasive plant species between four (4) weeks to six (6) weeks after each rainfall event of 0.5 inches (≥ 12.7 mm) or more. When surveys determine that noxious, invasive, or other designated plants species listed in the NSCP for control are found to be present within the project right-of-way, the contractor shall treat the areas designated by the Engineer in accordance with the approved NSCP. Such treatments shall be completed and approved by the Engineer before ground disturbing or earthmoving activities occur from those areas.

The contractor shall mark those areas receiving manual / mechanical control with an application of a photosensitive dye. Herbicides shall be mixed with a photosensitive dye which will produce a contrasting color when sprayed upon the ground. The color shall disappear between three (3) and five (5) days after being applied. The dye shall not stain any surfaces nor injure non-target plant or animal species when applied at the manufacturer's recommended application rate.

Application of herbicide shall be in accordance with the manufacturer's instructions and the approved NSCP. Responsible herbicide applicators shall be licensed under the appropriate category as required by State Law.

Mowing shall be allowed if it is proven to be a successful permanent control method of annual noxious / invasive plant species as approved by the Engineer. If approved, mowing shall be performed before the annual noxious / invasive plant species are able to set seed. Mowing shall NOT be operated in areas where there are perennial noxious / invasive plant species. Mowing shall NOT be utilized for noxious / invasive plant species that carry existing seeds (seed heads / pods). All project areas and plant species to be mowed shall be carefully evaluated / identified by an ADOT construction PLA with approval from the Engineer.

Unless otherwise called out in the plans/details specified in these Special Provisions, or as directed by the Engineer, the contractor shall remove the identified noxious / invasive woody vegetation to the finished grade level without uprooting it (flush cutting). In order to stop stump regrowth, the applicable remaining stumps shall be promptly treated with suitable herbicide so the identified noxious / invasive woody vegetation will not sprout new growth from the stumps. Herbicide stump treatment shall NOT be conducted to plant species such as common evergreen coniferous shrubs and trees, which will unlikely generate stump regrowth. Manual / mechanical removal of remaining woody vegetation stumps and rootballs in erosive areas shall be avoided to maximum extent practicable (MEP). The removal method and process shall be evaluated by an ADOT construction PLA with approval from the Engineer.

Removal of soil seed bank that has been contaminated by the natural storage of seeds from noxious / invasive plant species shall be required for projects involving soil / ground disturbance from construction excavations or as designated by the Engineer. The contractor shall remove the top three (3) inches of the existing undisturbed surface soil from the project areas infested with noxious / invasive plant species as evaluated / identified by an ADOT construction PLA with approval from the Engineer. All removed contaminated soil seed bank shall be properly disposed of or placed (buried) below the top two feet (2'-0") of the final finished grade as directed by the Engineer. The removal, stockpile, burial, or disposal of contaminated soil seed banks shall be well contained / concealed during construction. The contractor shall then return all soil-seed-bank removal disturbed areas, to an acceptable surface condition (finished grade), as approved by the Engineer.

No earthmoving activities to the treated areas shall be approved until the employed weed management measures have been inspected to be successfully achieved with the approval of the Engineer.

For projects within transportation easements on BLM, USFS, or Tribal Lands, PUPs shall be prepared and submitted to the Engineer and ADOT construction PLA as required in the NSCP. The PUPs will be submitted by the Department to the appropriate BLM Field Office, National Forest, or appropriate representative of tribal government (governing body) and must be approved by the BLM, National Forest, or tribal government (governing body) before being approved by the Engineer.

The contractor shall keep records of all herbicide applications. A copy of this record shall be added to the NSCP and also submitted to the Engineer after each application. The contractor shall be responsible for the proper transport, storage, and application of all materials necessary for herbicide control treatments.

As a part of the integrated management approach, all areas to be treated for noxious and invasive plant species shall ultimately be seeded, landscaped, or permanently stabilized to

minimize and prevent weed re-invasion / re-infestation, as specified in these Special Provisions.

Method of Measurement:

Control of noxious and invasive plant species, either manually (mechanically) or with herbicides, will be measured by the square yard (SQ.YD.) of each treated area, as directed and approved by the Engineer.

Basis of Payment:

Listed bid quantities for CONTROL OF NOXIOUS PLANTS are for estimating and bidding purposes. They shall not be guaranteed to the contractor. The intensity for scope of work, project-specific present conditions, particular stages of noxious and invasive plant development, as well as annual rainfall patterns shall be considered / evaluated by the construction PLA and approved by the Engineer in determining final quantities and unit costs to be paid for.

During pre-construction meeting, the contractor in conjunction with Engineer shall verify and be in agreement with the quantity of areas to be treated as evaluated by an ADOT construction PLA. The quantity of areas to be treated shall be in compliance with environmental requirements.

The accepted quantities of control of noxious and invasive plant species, either manually (mechanically) or with herbicides measured as provided above, will be paid for at the contract unit price for each soil treatment directed and approved by the Engineer. Such price will be considered to include all labor, materials, equipment, and multiple mobilization costs required to complete the work as specified herein. Such price shall also cover collection, removal, containment, and disposal of noxious and invasive plant species. Up to four (4) mobilizations may be required to accomplish control of noxious and invasive plant species as specified herein. The Department will consider the cost of such multiple mobilizations to be included in the price bid for control of noxious and invasive plant species. Adjustments may be made to the contract through negotiation for more than four (> 4) mobilization activities as per the approval of the Engineer.

No measurement or payment will be made for treatment of those areas, manually / mechanically or with herbicides, not authorized and approved by the Engineer. No payment will be made for treatment areas not in compliance with the approved PUP/NSCP. No payment will be made for areas treated by herbicide products not in compliance with the approved PUP/NSCP. No measurement or payment will be made for the removal and proper disposal of waste materials; the cost being considered is included in contract items.

No measurement or payment will be made for preparation of the NSCP and, when applicable, the PUP, including the initial submittal and modifications, or for monitoring, the costs being considered are included in contract items.

No separate measurement or direct payment will be made for Control of Noxious Plants under Landscape Establishment as specified in Section 807 of the specifications and these Special

Provisions; the cost being considered is included in the respective contract item of Landscape Establishment.

For projects engaging extensive excavations/backfills, no separate measurement or direct payment will be made for the removal, stockpile, burial, or disposal of contaminated soil seed banks, as well as returning all soil-seed-bank removal areas to an acceptable surface condition (finished grade); the cost being considered is included in the respective contract item(s) of excavations/backfills.

ITEM 9240900 AVOIDANCE AREA PROTECTION PLAN AND MONITORING:

Description:

The work under this item includes preparing the Archaeological and Cultural Site Protection Plan (hereinafter referred to as the Plan) and furnishing Cultural Compliance Inspector(s) to monitor and implement the Plan as specified in Subsection 104.17(B) of the specifications.

Construction Requirements:

The contractor shall prepare and submit the Plan to the Engineer in accordance with Subsection 104.17(B)(1) of the specifications.

The contractor shall staff the Cultural Compliance Inspector(s) in accordance with Subsection 104.17(B)(2) of the specifications.

Method of Measurement:

Archaeological and Cultural Site Protection will be measured by the lump sum as a single complete unit of work.

Basis of Payment:

Payment for Archaeological and Cultural Site Protection, measured as provided above, will be made at the contract lump sum price, which price shall be full compensation for the work, complete in place.

(925SRVY, 05/21/26)

SECTION 925 CONSTRUCTION SURVEYING AND LAYOUT:

925-3.01 General: the first paragraph of the Standard Specifications is revised to read:

At the preconstruction meeting, the contractor shall furnish to the Engineer, for approval, the following:

- (A) A schedule of hourly survey services rates and classifications for additional survey work, which shall remain fixed and in effect for the entire duration of the work and shall not be subject to renegotiation; and
- (B) A written outline detailing the method of staking, marking of stakes, grade control for various courses of materials, referencing, structure control, pavement markings, and any other procedures and controls necessary for survey completion. A part of this outline shall also be a schedule which will show the sequencing of the survey and layout work, throughout the course of the contract, listing a percentage of completion for each month.

925-5 Basis of Payment: the second and third paragraphs of the Standard Specifications is revised to read:

If additional staking and layout are required as a result of additional work ordered by the Engineer, such work will be paid for in accordance with the provisions of Subsection 109.04 of the specifications.

Payment will be made utilizing the schedule of rates provided per Subsection 925-3.01. No additional payment will be made for overtime hours. Should such additional work require the contractor to pay travel and subsistence costs for the survey party or survey parties utilized, payment for travel and subsistence will be made under the provisions of Subsection 109.04 of the specifications. The Engineer will determine whether the additional work shall be performed by the contractor or by Department forces.

(928LONG, 09/16/21)

SECTION 928 GROUND-IN RUMBLE STRIP: the title and text of the Standard Specifications are revised to read:

SECTION 928 LONGITUDINAL GROUND-IN RUMBLE STRIP:

928-1 Description:

The work under this item shall include furnishing all tools, equipment and labor necessary to install longitudinal ground-in rumble strips of the size and at the locations specified on the project plans or as directed by the Engineer.

928-2 Blank:

928-3 Construction Requirements:

Longitudinal ground-in rumble strips shall be constructed by mechanically milling or grinding grooves into new or existing asphalt concrete pavements. The grooves shall be constructed with a cylindrical configuration in the direction of the traffic flow, and shall be placed in accordance with the details shown on the project plans. Exceptions in longitudinal ground-in rumble strips not shown on the plans will be designated by the Engineer.

The grooves shall be constructed with equipment specifically designed to remove such material by means of grinding to a controlled line and grade. The equipment used shall be capable of removing the existing asphaltic concrete to the dimensions and tolerances specified on the plans. The removals shall be accomplished in a manner which does not scar the surface of the adjacent pavement. Grooves shall not be constructed in new asphaltic concrete pavements for a minimum of three days after placement, or 10 days after placement of new asphaltic concrete pavements with asphalt-rubber. Construction of the grooves may be allowed in less time if the contractor can demonstrate that the pavements are sufficiently cured.

The contractor shall place a continuous control line as a guide for installation. The milling machine shall also be equipped with an approved guide that is clearly visible to the operator so that proper alignment of the grooves will be obtained. Lateral deviation of the milled rumble strips shall not exceed one inch in any 100 foot interval.

The contractor shall also use high pressure air to remove any millings and debris remaining after the use of the equipment's vacuum recovery system. Such debris shall be removed to the shoulder and disposed of in a manner approved by the engineer.

928-4 Method of Measurement:

Longitudinal ground-in rumble strips will be measured by linear foot at the locations shown in the project plans and in accordance with the specifications.

Gaps in the pattern and exceptions in the longitudinal ground-in rumble strips will not be included in the measurement.

No measurement will be made for the removal and disposal of milling and debris.

928-5 Basis of Payment:

The accepted quantities of longitudinal ground-in rumble strips, measured as provided above, will be paid for at the contract unit price per linear foot, which price shall be full compensation for the work complete in place as shown on the project plans and as specified herein.

No additional payment will be made for the removal and disposal of milling and debris, the cost being considered as included in the price of the contract item.

(1001MATL, 06/17/21)

SECTION 1001 MATERIAL SOURCES: of the Standard Specifications is revised to read:

1001-1 Description:

The work under this section shall consist of the procuring of borrow, topsoil, subbase and base materials, mineral aggregates for concrete structures, surfacing, and landscape plating, from sources either designated on the project plans or in the Special Provisions or from other sources.

1001-2 General:

The contractor shall determine for itself the type of equipment and work required to produce a material meeting the requirements of the specifications.

Sites from which material has been removed shall, upon completion of the work, be left in a neat and presentable condition. Where practicable, borrow pits, gravel pits, and quarry sites shall be located so that they will not be visible from the highway.

The contractor shall provide an environmental analysis, as specified in Subsection 104.12 of the specifications, for any source proposed for use regardless of whether a previously approved environmental analysis exists for the site.

In accordance with Subsection 104.12 of the specifications, the contractor may utilize an existing environmental analysis approved after January 1, 1999, provided that the analysis is updated as necessary to be in compliance with current regulations and with the contractor's planned activities.

It shall be the responsibility of the contractor to conduct any necessary investigations, explorations, and research, on-site and otherwise, before and after submitting the bid proposal, to satisfy itself that the specified quantity and/or quality of material exists in any proposed material source.

The contractor shall not produce material for the project, mobilize crushing equipment or clear a worksite prior to approval of the environmental analysis.

The contractor shall comply with the requirements of the landowner or agency having jurisdiction over the land.

The Department makes no representation regarding quality or quantity of materials in any source.

1001-2.01 Information Available:

The Department maintains a listing of materials sources for which a completed environmental analysis is available and the landowner has allowed the source to be placed on the list. Further information on material sources is available at <https://azdot.gov/business/environmental-planning/material-source-guidance>.

1001-2.02 Material Sources in Floodplains:

Any development of a material source that is determined to be in a flood plain must meet the requirements of the appropriate local, state, and federal agencies, including as applicable, the U.S. Army Corps of Engineers, Section 404 of the Clean Water Act, ADEQ or Tribal 401 Water Quality Certification, and the National or Arizona Pollutant Discharge Elimination System (NPDES/AZPDES).

If the contractor wishes to procure a material source within a floodplain, the contractor or material supplier shall submit a Floodplain Use Permit application to the appropriate floodplain management agency. The contractor shall submit to the Department documentation that the Floodplain Use Permit for the material source was approved and signed by the appropriate agency's Floodplain Administrator. The contractor or material supplier shall comply with all the requirements of the Floodplain Use Permit, including renewal of the Permit as needed or required.

The Department will require an engineering report if the material source is situated in the 100 year floodplain of any stream or watercourse, and located within one mile upstream and two miles downstream of any highway structure or surfaced roadway crossing. The engineering report shall be prepared by a professional engineer with expertise in hydrology, hydraulics, river mechanics, and fluvial geomorphology. The engineering report shall address the effects of the potential for structural damages following a 100 year flood event.

All other permits required to obtain a material source shall be furnished to the Department upon request.

Surplus material from agency administered flood control management projects may be used as borrow material only if the contractor submits written evidence to the Engineer that the flood control agency project was fully designed and funded.

Material sources in floodplains located on Native American Tribal Lands will be considered for use on an individual analysis. The analysis shall include a review of applicable land use plans, floodplain management plans, environmental plans, applicable laws and regulations pertaining to Native American Tribal Lands, and an engineering analysis of the effects on any highway facility or structure. The contractor shall obtain from the Bureau of Indian Affairs (BIA) and the Native American Tribal Council all permits, licenses, and approvals for the Department to review.

1001-2.03 Protection and Restoration:

The contractor shall comply with the requirements of Subsections 107.11 and 107.12 of the specifications for protecting and restoring the material source. The contractor shall assume full responsibility to protect and rehabilitate the material source to the satisfaction of the Department and in compliance with the requirements of the Federal Land Management Agency (FLMA) having jurisdiction or by the owner of the material source.-

1001-3 Proposed Source:

1001-3.01 Approval Requirements:

(A) General:

The contractor shall notify the Engineer prior to or at the preconstruction conference as to the source that it proposes to use.

The contractor acknowledges that all the conditions set forth in this subsection shall be met prior to the source being approved for use.

Other than sampling and testing, the requirements of this subsection shall be completed prior to initiation of any activities that disturb the existing conditions at the proposed source.

Regulatory changes, specification changes, or other reasons may preclude the approval of a materials source. The contractor acknowledges that the Department may refuse to approve a material source even if the Department had approved the source for other projects.

(B) Specific Conditions for Approval:

The use of a source will require written approval by the Engineer. No approval will be given until the contractor has complied with the following conditions:

- (1) The contractor has submitted an environmental analysis, as specified in Subsection 104.12 of the specifications, of the source proposed for use and the Department has reviewed the analysis and satisfied itself that the use of such source will not have an adverse social, economic or environmental impact. The requirements of Subsection 1001-3.01 of the specifications shall be completed prior to initiation of any activities that disturb the existing conditions at the proposed source.
- (2) The contractor has furnished the Engineer with evidence that he has secured the rights to the source, including ingress and egress.

(C) Historical and Cultural Resources:

The archaeological survey report of the proposed material source shall be prepared by the contractor's archaeological consultant and shall conform to the requirements of Subsection 104.12 of the specifications.

In the event that prehistoric or historic structures and prehistoric or historic artifacts are encountered during any activity related to the construction of the material source, the contractor shall immediately cease operations within a 50 foot radius of the discovery location and notify the Engineer. In the event that an unmarked human burial and/or funerary remains are encountered during any activity related to the construction of the material source, the contractor shall immediately cease operations within a 100 foot radius of the discovery location and notify the Engineer. The Engineer will contact the Environmental Planning – Historic Preservation Team so that appropriate notification of the discovery is made per state and federal regulations.

After notifying the Engineer, the contractor shall, within good faith, secure the area and take all reasonable measures to protect the historical and cultural resources. No activity shall

resume unless authorized by the Engineer. The Engineer will not authorize resumption of any activity until receiving confirmation from the Environmental Planning – Historic Preservation Team that the contractor may commence work.

If the Department determines that the proposed use will have major adverse impact on cultural or historic resources, the Department will not allow the use of the source.

(D) Permit from Navajo Nation:

For projects located on the Navajo Reservation, the Navajo Nation has adopted a permitting system for any sources, regardless of whether on or off the Navajo reservation, which are to supply material for projects located within its boundaries. No material source will be approved until the contractor submits a copy of the permit from the Navajo Nation allowing materials from the proposed source to be used on the project. For information concerning the permit, the contractor shall contact the Navajo Nation Historic Preservation Office.

(E) Bureau of Land Management Material Sources:

If the contractor elects to pursue the use of material sources on BLM land under Title 30 Code of Federal Regulations, it is at the contractor's sole risk, and the Department bears no responsibility for any delays or costs associated with the request to use material sources on BLM Land.

The Department will not request or pursue any "free-use permit" under Title 23 Code of Federal Regulations or any other arrangement with BLM on this project.

1001-4 Special Access within Right Of Way:

The contractor may submit a request to the District Engineer to approve special access to a controlled access highway if special access is not shown on the project plans.

The request by the contractor shall be accompanied by an environmental analysis and by documents which specify the point(s) of access, the acquisition of right of way, the manner in which access will be attained, the traffic control plan, and crossovers, along with all other appropriate data which will allow the District Engineer to evaluate its request. If the request is approved, a supplemental agreement shall be entered into.

All costs associated with the special access requested by the contractor shall be borne by the contractor, including, but not limited to, cattle guards, fences, gates and restoration work.

When access is not being utilized, gates shall be closed and locked. Upon completion of all operations, the area within the right of way that has been disturbed shall be restored to the condition existing prior to the contractor's operations.

The decision by the District Engineer to deny a request by the contractor will be considered to be final.

1001-5 Fences and Cattle Guards:

Where the haul roads to material sources cross existing fence lines in areas where there is livestock of any kind, temporary cattle guards shall be installed by the contractor at each crossing.

The livestock operator or owner shall be contacted prior to the beginning of any operations and effective measures shall be taken and means provided by the contractor to prevent livestock from straying.

In operations where conditions will exist that are dangerous to livestock of any kind, temporary cattle guards and fence shall be installed around the pit area by the contractor to protect livestock.

Temporary cattle guards and fence installed by the contractor shall be removed and existing fence disturbed shall be replaced or reconstructed and all fence shall be left in as good condition as it was prior to the beginning of work.

(1003REBAR,12/17/20)

SECTION 1003 REINFORCING STEEL: of the Standard Specifications is revised to read:

1003-1 General Requirements:

Reinforcing steel shall be furnished in the sizes, shapes, and lengths shown on the plans and in conformance with the requirements of the specifications.

Certificates of Compliance conforming to the requirements of Subsection 106.05 of the specifications shall be submitted for epoxy coated reinforcing bars, as well as uncoated reinforcing bars, wire, and welded wire fabric. In addition, for epoxy coated reinforcing bars, Certificates of Compliance shall be submitted from the coating manufacturer and Certificates of Analysis shall be submitted from the coating applicator.

When reinforcing steel is delivered to the project site, the contractor shall furnish the Engineer with a copy of all shipping documents. Each shipping document shall show the sizes, lengths, and weights of the reinforcing steel separately for each structure.

Reinforcing steel shall be free of dirt, oil, paint and grease and shall conform to the requirements of Section 605 of the specifications. Reinforcing steel shall be protected at all times from damage. All reinforcing steel shall be free of dirt, oil, paint and grease. Rust, surface irregularities, or mill scale will not be the cause for rejection, provided the weight, dimensions, cross-sectional area, and tensile properties of a manually wire brushed test specimen are not less than the requirements of the specifications.

1003-2 Reinforcing Bars:

Except when used for wire ties or spirals, steel bars used as reinforcement in concrete shall be deformed and shall conform to the requirements of ASTM A615 for Grade 60 steel. Unless otherwise specified, steel bars meeting the requirements of ASTM A706 may be substituted for ASTM A615 steel bars. When ASTM A706 bars are used, tack welding of the

reinforcement will not be permitted unless approved by the Engineer.

Samples of reinforcing bars taken at the supplier's or fabricator's place of business shall be defined as pre-shipment samples, while those samples obtained from stockpile or shipment at the project shall be defined as project samples. A shipment shall be considered any amount of reinforcing bars delivered to a project on any given day, of one transported load.

Reinforcing bars sizes No. 4, No. 5, and No. 6 will be accepted with the submission of a Certificate of Compliance. All other reinforcing bar sizes shall be subject to pre-shipment and project sampling as outlined below.

1003-2.01 Pre-Shipment Sampling:

Prior to shipment of reinforcing bars to the project, the supplier or contractor shall contact Materials Group, Structural Materials Testing Section to obtain a laboratory number referenced to the project number. A random sample shall be taken at the supplier's place of business and delivered to the Structural Materials Testing Section. For bar size No. 14, the sample shall be one piece not less than 42 inches in length, selected at random for each shipment up to 30 tons. For bar size No. 18, the sample shall be one piece not be less than 42 inches in length, selected at random for each shipment up to 50 tons. For all other bar sizes, the sample shall be one piece not less than seven feet in length, selected at random for each shipment up to 20 tons. Samples shall be submitted for each bar size, grade, heat number, and manufacturer in the shipment. The pre-shipment bars that are obtained from the supplier or fabricator must be accompanied by a Certificate of Compliance. The information shown on the certificate must match the bar identification marks. If no Certificate of Compliance is available or the information shown on the certificate is incomplete or inaccurate, the bars will not be accepted for testing.

When the supplier or fabricator makes a shipment to a project, a Certificate of Compliance shall be furnished stating that the material in the shipment is from the same stock as the pre-shipment sample covered by the laboratory number assigned by the Structural Materials Testing Section. Reinforcing bars represented by the pre-shipment sample failing to comply with the specification requirements shall not be used on any project.

1003-2.02 Project Sampling:

The Engineer reserves the right to sample reinforcing bars at any time. Project samples shall consist of one sample bar not less than seven feet in length for all bar sizes. Placement of the reinforcing bars shall not be delayed while the contractor is awaiting test results.

Concrete placement operations shall not begin until satisfactory test results of the project sample bars are obtained.

When the supplier or fabricator makes a shipment to a project from outside the Phoenix or Tucson areas, or not otherwise subjected to pre-shipment sampling, the shipment shall be accompanied by a Certification of Compliance. Before any reinforcing bars from a shipment is to be incorporated into the project work, a project sample shall be taken, tested, and approved by the Structural Materials Testing Section. A project sample shall be taken as soon as practical upon arrival at the job site. A different project sample that is representative of

each bar size, grade, heat number, and manufacturer from that shipment will be required. The sampling requirements described for pre-shipment sampling for the Phoenix or Tucson areas shall be used.

1003-3 Wire:

Steel wire used as spirals or ties for reinforcement in concrete shall conform to the requirements of AASHTO M 336. Wire shall be deformed or cold drawn (smooth).

1003-4 Welded Wire Fabric:

Welded wire fabric for concrete reinforcement shall conform to the requirements of AASHTO M 336.

1003-5 Epoxy Coated Reinforcing Bars:

1003-5.01 Steel:

Reinforcing bars shall conform to the requirements of Subsection 1003-2 of the specifications.

Epoxy coated reinforcing bars will be sampled and tested in the same manner as uncoated reinforcing bars. The coating and flexibility of the epoxy coated reinforcing bars will also be tested by the Department for acceptance.

1003-5.02 Epoxy for Coating:

A list of powdered epoxy resins which have passed prequalification tests, as described in ASTM A775, "Epoxy Coated Steel Reinforcing Bars", is maintained on the Department's Approved Products List (APL). The powdered epoxy resins selected by the contractor and furnished by the manufacturer shall be of the same material and quality as the resins listed on the APL, and shall be applied and cured in the same manner used to coat the test bars in the original powder prequalification test. Copies of the most current version of the APL are available on the internet from the ADOT Research Center through its Product Evaluation Program.

Prequalification testing may be performed by the National Bureau of Standards, State laboratories, or qualified private laboratories.

The Certificate of Compliance from the coating manufacturer shall properly identify the batch and/or lot number, material, quantity of batch, date of manufacture, name and address of manufacturer, and a statement that the material is the same composition as the initial sample prequalified for use. The certificate shall also state that production bars and prequalification bars have been identically prepared and applied with epoxy powders.

Patching or repair material, compatible with the coating and inert in concrete shall be made available by the epoxy coating manufacturer. This material shall be suitable to repair areas of the coating which were damaged during fabrication or handling in the field.

1003-5.03 Application of Coating:

The coating applicator's facility shall be subject to approval by the Department. Applications for approval of facilities shall be made to the Department by the coating applicator.

The surface to be coated shall be blast cleaned in accordance with the requirements of the Society for Protective Coatings, Surface Preparation Standard SSPC-SP10, Near White Blast Cleaning.

The powdered epoxy resin coating shall be applied to the cleaned surface as soon as possible after cleaning and before visible oxidation occurs. In no case shall more than eight hours elapse between cleaning and coating.

The protective epoxy coatings shall be applied by the electrostatic spray method or the electrostatic fluidized bed method in accordance with the recommendations of the coating manufacturer. The epoxy coating may be applied before or after fabrication of the reinforcing bars.

The epoxy coating shall be applied as a smooth uniform coat. After curing, the coating thickness shall be in accordance with the requirements of ASTM A775. Coating thickness shall be controlled by taking measurements on a representative number of bars from each production lot. Coating thickness measurements shall be conducted by the method outlined in the Society for Protective Coatings Paint Application Standard SSPC-PA2.

The coating shall be checked visually after cure for continuity. It shall be free from holes, voids, contamination, cracks and damaged areas.

The coating shall not have more than two holidays (pinholes not visible to the naked eye) in any linear foot of the coated item. A holiday detector shall be used, in accordance with the manufacturer's instructions, to check the coating for holidays.

The flexibility of the coating shall be evaluated on a representative number of bars selected from each production lot. The coated bar shall be bent 120 degrees (after rebound) around a six-inch diameter mandrel. The bend shall be done at a uniform rate and may take up to one minute to complete. The test specimens shall be at thermal equilibrium between 68 and 85 degrees F at the time of testing. No cracking of the coating shall be visible to the naked eye on the outside radius of the bent bar.

The contractor shall furnish a Certificate of Analysis from the coating applicator with each shipment of coated steel. In addition to the requirements of Subsection 106.05 of the specifications, the Certificate of Analysis shall state that the coated items and coating material have been tested in accordance with the requirements of this subsection and that the entire lot is in a fully cured condition.

The coating applicator shall be responsible for performing quality control and tests. This will include inspection and testing to determine compliance with the requirements of this subsection for the coating thickness, continuity of coating, coating cure, and flexibility of coating.

The Department reserves the right to have its authorized representative observe the preparation, coating, and testing of the reinforcing bars. The representative shall have free access to the plant, and any work done when access has been denied will be automatically rejected.

If the representative elects, lengths of coated bars may be taken from the production run on a random basis for test, evaluation, and check purposes by the Department.

1003-5.04 Shop Repair:

Epoxy coated reinforcing bars which do not meet the requirements for coating thickness, continuity of coating, coating cure, or flexibility of coating shall not be repaired.

Reinforcing bars with these defects shall be replaced, or alternately stripped of epoxy coating, recleaned and recoated in accordance with the requirements of this specification.

Coating breaks due to fabrication and handling shall be repaired with patching material if the defective area exceeds 2 percent of the surface area of the bar in a one-foot length and the damaged spot is larger than 1/4 inch by 1/4 inch.

The repair of coating breaks shall be limited to bars on which the total of the defective coating areas does not exceed 5 percent of the surface area of the reinforcing bar. Bars with greater than 5 percent damage shall be replaced, or alternately stripped of epoxy coating, recleaned and recoated in accordance with the requirements of this specification.

1003-6 Prestressing Reinforcing Steel:

Prestressing reinforcing steel shall conform to the requirements of Section 602-2.01 of the specifications.

Prestressing steel shall be high-tensile steel wire, high-tensile seven-wire strand or high-tensile alloy bars, as shown in the plans.

High-tensile steel wire shall conform to the requirements of AASHTO M 204.

High-tensile seven-wire strand shall conform to the requirements of AASHTO M 203 for Grade 270. In addition to the 0.5-inch diameter prestressing steel typically shown on the plans, 0.6-inch diameter seven-wire strand may be used for cast-in-place prestressed structures.

High-tensile alloy bars shall conform to the requirements of AASHTO M 275.

All prestressing steel shall be satisfactorily protected from damage by abrasion, moisture, rust, or corrosion and shall be free of dirt, rust, oil, grease, or other deleterious substances.

For every five reels of prestressing steel furnished, one sample not less than six feet long, will be tested by the Engineer. Samples of the furnished reels with the manufacturer's Certificate of Compliance, a mill certificate, and a test report may be shipped directly by the manufacturer to the Engineer.

1003-7 Dowel Bars for Portland Cement Concrete Pavement:

Dowel bars shall be round, plain steel bars of the dimensions shown on the plans conforming to the requirements of AASHTO M 254 with Type B coating. The core material shall conform to the requirements of ASTM A615, Grade 60.

Epoxy coated dowel bars shall also conform to the requirements of Subsection 1003-5 of the specifications.

The Contractor shall furnish a Certificate of Compliance that properly identifies the coating material, the number of each batch of coating material used, quantity represented, date of manufacture, name and address of manufacturer, and a statement that the supplied coating material meets the requirements of AASHTO M 254 with Type B coating.

(1005PG, 06/19/25)

SECTION 1005 BITUMINOUS MATERIALS:

1005-3 Bituminous Material Requirements:

1005-3.01 Asphalt Cement: of the Standard Specifications is revised to read:

Asphalt cement shall be a performance grade (PG) asphalt binder conforming to the requirements of AASHTO M 320. Air blown/oxidized asphalt, Polyphosphoric acid (PPA) modification and re-refined/recycled engine oil bottom (REOB) will not be accepted. The pressure aging temperature for all binders, including Terminal Blend rubberized binder and Polymer modified asphalt binder shall be as specified below:

PG Asphalt Binder	Pressure Aging Temperature
PG 70-XX and above	110 °C
PG 64-XX and below	100 °C

If Terminal Blend rubberized binder (XX-XXTR+) is used, it shall conform to the requirements of Table 1005-1 and 1005-1a.

If Polymer modified asphalt binder (XX-XXPM) is used, it shall conform to the requirements of Table 1005-1 and 1005-1b.

If, during asphaltic concrete production, it is determined by testing that asphalt cement fails to meet the requirements for the specified grade, the asphaltic concrete represented by the corresponding test results shall be evaluated for acceptance. Should the asphaltic concrete be allowed to remain in place, the contract unit price for asphaltic concrete will be adjusted by the percentage shown in Table 1005-1. Should the asphalt cement be in reject status, the contractor may, within 25 days of receiving notice of the reject status, supply an engineering analysis of the expected performance of the asphaltic concrete in which the asphalt cement is incorporated. The engineering analysis shall detail any proposed corrective action and the anticipated effect of such corrective action on the performance. Within three working days, the Engineer will determine whether or not to accept the contractor's proposal. If the proposal

is rejected, the asphaltic concrete shall be removed and replaced with asphaltic concrete meeting the requirements of the specifications at no additional expense to the Department. If the contractor's proposal is accepted, the asphaltic concrete shall remain in place at the applicable percent of contract unit price allowed, and any necessary corrective action shall be performed at no additional cost to the Department.

1005-3.03 Emulsified Asphalt: the fourth paragraph of the Standard Specifications is revised to read:

Emulsified asphalts shall be homogeneous. If emulsified asphalt has separated, it shall be thoroughly mixed to insure homogeneity. If emulsified asphalt has separated due to freezing, it shall not be used. Emulsified asphalt shall not be used after 30 days from production.

1005-3.04 Emulsified Asphalt (Special Type): of the Standard Specifications is revised to read:

Emulsified asphalt (special type) shall consist of Type SS-1 or CSS-1 diluted with water to provide an asphalt content not less than 26 percent. The water used shall be potable. Potable water obtained from public utility distribution lines will be acceptable. The water used shall be free of injurious amounts of oil, acid, alkali, clay, vegetable matter, silt, or other harmful matter. The material shall not be diluted in the field.

1005-3.07 Other Requirements: the tables 1005-1, 1005-1a, and 1005-1b of the Standard Specifications are revised to read:

TABLE 1005-1 ASPHALT BINDER ADJUSTMENT TABLE			
Test Property	AASHTO Test Method	Test Result	Percent of Contract Unit Price Allowed
Dynamic Shear of Original Binder: G*/Sin δ , kPa	T 315	≥ 1.00 0.90-0.99 0.70-0.89 < 0.70	100 98 95 88 (1)
Dynamic Shear of RTFO Binder: G*/Sin δ , kPa	T 315	≥ 2.20 2.00-2.19 1.60-1.99 < 1.60	100 98 95 88 (1)
Dynamic Shear of PAV Binder: G*Sin δ , kPa	T 315	≤ 5000 5001-5500 5501-7000 7001-8000 > 8000	100 98 95 89 87 (1)
Creep Stiffness of PAV Binder: S, Mpa	T 313	≤ 300 301-330 331-450 451-600 > 600	100 98 95 89 87 (1)
m-value at 60 sec.	T 313	≥ 0.300 0.270-0.299	100 98

		0.230-0.269 < 0.230	90 87 (1)
Notes: (1) Reject Status: The pay adjustment applies if allowed to remain in place. (2) Specified properties in AASHTO M 320 for flash point, viscosity at 135 °C, and mass loss are not considered performance related. Specification deficiencies for these properties shall be cause for a work stoppage until specification properties are met, but will not be cause for a pay adjustment. (3) Should the bituminous material be deficient on more than one property, the pay adjustment will be the greatest reduction to the contract unit price specified considering individual test results. (4) The information presented in this table does not apply to asphalt cement used for tack coats.			

TABLE 1005-1a Terminal Blend rubberized binder (XX-XXTR+)				
Test Property	Test Method	Requirement	Test Result	Percent of Contract Unit Price Allowed
Solubility, %, minimum	ASTM D7553 or ASTM 2042	98	-----	-----
Elastic Recovery, @ 10 °C, %, minimum	AASHTO T 301	75	75 70 - 74 < 70	100 89 87 (1)
(1) Reject Status: The pay adjustment applies if allowed to remain in place.				
Notes: In case of dispute, ASTM D2042 shall be used to determine the Solubility. The asphalt binder shall contain a minimum of 8 percent crumb rubber and a minimum of 3 percent SBS (styrene-butadiene-styrene) polymer. The crumb rubber shall be derived from processing whole scrap tires or shredded tire materials. The tires from which the crumb rubber is produced shall be taken from automobiles, trucks, or other equipment owned and operated in the United States. The processing shall not produce, as a waste product, casings or other round tire material that can retain moisture when stored or disposed of above ground. Modified binders shall be blended at the source of supply and delivered as a homogenous mixture to the job site. Modified Binders stored at the asphalt concrete mixing plant for more than two weeks or beyond the supplier recommended shelf life, whichever is less, shall be sampled and tested.				

TABLE 1005-1b Polymer Modified Asphalt Binder (XX-XXPM)				
Test Property	Test Method	Requirement	Test Result	Percent of Contract Unit Price Allowed
Solubility, %, minimum	ASTM D7553 or ASTM D2042	98	-----	-----
Elastic Recovery @ 10°C, %, minimum	AASHTO T 301	75	≥ 75 70 - 74 < 70	100 89 87 (1)
(1) Reject Status: The pay adjustment applies if allowed to remain in place.				
Notes: In case of dispute, ASTM D2042 shall be used to determine the Solubility. Asphalt binder shall contain a minimum of 3 percent SBS (styrene-butadiene-styrene) polymer. Modified binders shall be blended at the source of supply and delivered as a homogenous mixture to the job site. Modified Binders stored at the asphalt concrete mixing plant for more than two weeks or beyond the supplier recommended shelf life, whichever is less, shall be sampled and tested.				

1005-3.07 Other Requirements: the table 1005-1c of the Standard Specifications is hereby deleted.

1005-3.07 Other Requirements: the table 1005-3 of the Standard Specifications is revised to read:

TABLE 1005-3							
EMULSIFIED ASPHALTS							
Tests On Emulsion	Test Method	Requirement					
		RS-1	CRS-1	RS-2	CRS-2	SS-1	CSS-1
Viscosity: Saybolt Furol, seconds, range 77 °F 122 °F	AASHTO T 59	20-100	20-100	50-400	50-400	20-100	20-100
Settlement: 5 days, %, maximum	AASHTO T 59	5	5	5	5	5	5
Sieve: Retained on No. 20, %, maximum	AASHTO T 59 (1)	0.10	0.10	0.10		0.10	0.10
Particle Charge	AASHTO T 59		Pos.		Pos.		Pos. (2)
Demulsibility: 35 mL, 0.02 N calcium chloride %, minimum	AASHTO T 59	60		60			
Classification: Uncoated particles, %, minimum	Arizona Test Method 502				55		
Residue: (3) Residue, %, minimum (4)		55	60	63	65	57	57
Notes: (1) Distilled water shall be used. Two percent sodium oleate solution will not be accepted. (2) If the Particle Charge Test result is inconclusive, material having a maximum PH value of 6.7 will be acceptable. (3) Residue will be obtained in accordance with the requirements of Arizona Test Method 504 and shall conform to all the requirements of AASHTO M 320 for PG 64-16, except that for CRS-2 the dynamic shear ($G^*/\sin \delta$) on the original residue shall be a minimum of 1.00 kPa and a maximum of 1.50 kPa. (4) Residue by evaporation may be determined in accordance with the requirements of Arizona Test Method 512; however, in case of dispute, AASHTO T 59 will be used.							

1005-3.07 Other Requirements: the note (2) of Table 1005-3a of the Standard Specifications is revised to read:

(2) Testing shall be performed on residue by distillation. Testing on residue by oven evaporation will not be accepted.

1005-3.07 Other Requirements: the table 1005-5 of the Standard Specifications is revised to read:

TABLE 1005-5					
EMULSIFIED RECYCLING AGENTS					
Tests on Emulsified Recycling Agent	Test Method	Requirement			
		ERA-1	ERA-5	ERA-25	ERA-75
Viscosity: Saybolt Furol, 77 °F, seconds range	AASHTO T 59	15 - 40	15 - 100	15 - 100	15 - 100
Miscibility	AASHTO T 59	Passes	Passes	Passes	Passes
Sieve Test: %, maximum	AASHTO T 59 (1)	0.10	0.10	0.10	0.10
Particle Charge	AASHTO T 59	Positive	Positive	Positive	Positive
Residue: (2) Residue, %, minimum	(3)	60	60	60	60
Notes: (1) Distilled water shall be used. Two percent sodium oleate solution will not be accepted. (2) Residue will be obtained in accordance with the requirements of Arizona Test Method 504 and shall conform to the requirements specified in Table 1005-4. (3) Residue by evaporation may be determined in accordance with the requirements of Arizona Test Method 512; however, in case of dispute, AASHTO T 59 will be used.					

1005-3.07 Other Requirements: the Paving Asphalt row of the table 1005-6 of the Standard Specifications is modified to add:

TABLE 1005-6			
OTHER REQUIREMENTS			
Grade of Asphalt Specification Designation	Range of Temperatures for Application by Spraying, °F (Not applicable for Plant Mixing)	Range of Aggregate Temperatures for Plant Mixing, °F	Basis of Conversion, Average Gallons Per Ton at 60 °F
Paving Asphalt	275 - 400	-----	
PG 76-22 PM 229			231
PG 70-22 PM 230			232
PG 64-28 PM			233

(1006PCC, 09/21/23)

SECTION 1006 PORTLAND CEMENT CONCRETE:

1006-2.01(A) General: of the Standard Specifications is revised to read:

Cementitious material is defined as an inorganic material or a mixture of inorganic materials that sets and develops strength by chemical reaction with water by formation of hydrates and is capable of doing so under water. In this specification, cementitious materials are defined as hydraulic cement (Portland cement, Portland-pozzolan cement or Portland-limestone cement) and supplementary cementitious materials (fly ash, natural pozzolan, or silica fume).

1006-2.01(B) Hydraulic Cement: the first paragraph of the Standard Specifications is revised to read:

Hydraulic cement shall consist of Portland cement, Portland-pozzolan cement or Portland-limestone cement.

1006-2.01(B) Hydraulic Cement: of the Standard Specifications is modified to add:

Portland-limestone cement shall conform to the requirements of ASTM C595 for blended hydraulic cement with moderate sulfate resistance, Type IL (MS).

1006-2.01(C)(2) Flyash and Natural Pozzolan: of the Standard Specifications is revised to read:

Fly ash and natural pozzolan shall conform to the requirements of ASTM C618 for Class C, F, or N.

TABLE 1006-5 Design Criteria: the column heading of the third column of the Standard Specifications is revised to read:

		Cementitious Material Content: Lbs. per Cu Yd. Minimum - Maximum		
--	--	---	--	--

1006-3.02(C) Mix Design Submittal Requirements: the items (16) and (18) of the Standard Specifications are revised to read:

(16) Volume of each material measured to the nearest hundredth of a cubic foot;

(18) Total volume measured to the nearest hundredth of a cubic foot;

1006-7.02(A) General: the fifth paragraph of the Standard Specifications is revised to read:

Concrete shall be sampled in accordance with ASTM C172 for acceptance testing of temperature, slump, unit weight and yield (when required) and air content (when required) as well as for fabrication of test cylinders for compressive strength determination at 28 days except that the concrete shall be sampled once during discharge at the middle portion of the batch. ASTM C172 includes sampling from stationary, paving and truck mixers, and from agitating and non-agitating equipment used to transport central-mixed concrete and from continuous mixing equipment as described in Specification ASTM C685/C685M. Sampling shall be at the point of discharge from truck mixers. Sufficient care shall be taken to obtain a representative sample by diverting the entire stream of the concrete to prevent segregation. Samples shall be of sufficient size to perform all the required tests and fabricate the necessary test cylinders but in no case less than 1 cubic foot.

1006-7.02(B) Class S and Class B Concrete: of the Standard Specifications is revised to read:

For Class S concrete with a compressive strength requirement less than 4000 psi, or Class B concrete, a strength test will consist of the average strength of two test cylinders. However, if the compressive strengths of the two test cylinders differ by more than 10 percent from the average of the two, the strength test result shall be the cylinder with the highest compressive strength.

For Class S concrete with a compressive strength requirement equal to or greater than 4000 psi, or Class P concrete, the compressive strength of each sample shall be determined by averaging the results of the three test cylinders. However, if the compressive strength of any one of the three test cylinders differs by more than 10 percent from the average of the three, its result shall be discarded and the compressive strength shall be the average of the remaining two cylinders. Should the individual compressive strength of any two of the three remaining cylinders differ by more than 10 percent from the average of the three, the results will be discarded and the compressive strength shall be the strength of the remaining cylinder.

1006-7.03(A)(3) Consistency: the third paragraph of the Standard Specifications is revised to read:

When the concrete is pumped, samples for consistency will be taken as the concrete leaves the mixer.

TABLE 1006-10 Air Entrainment Requirements: the table of the Standard Specifications is revised to read:


TABLE 1006-10 Air Entrainment Requirements		
Elevation	Air Entrainment Required	Required Air Content by Volume (%)
3000 feet or above	Yes	4 to 7
Below 3000 feet	Contractor's Option	≤ 7

ATTACHMENT A

SUBGRADE ACCEPTANCE CHART

FIGURE 2 - SUBGRADE ACCEPTANCE CHART

SR 89A and Page Springs Road

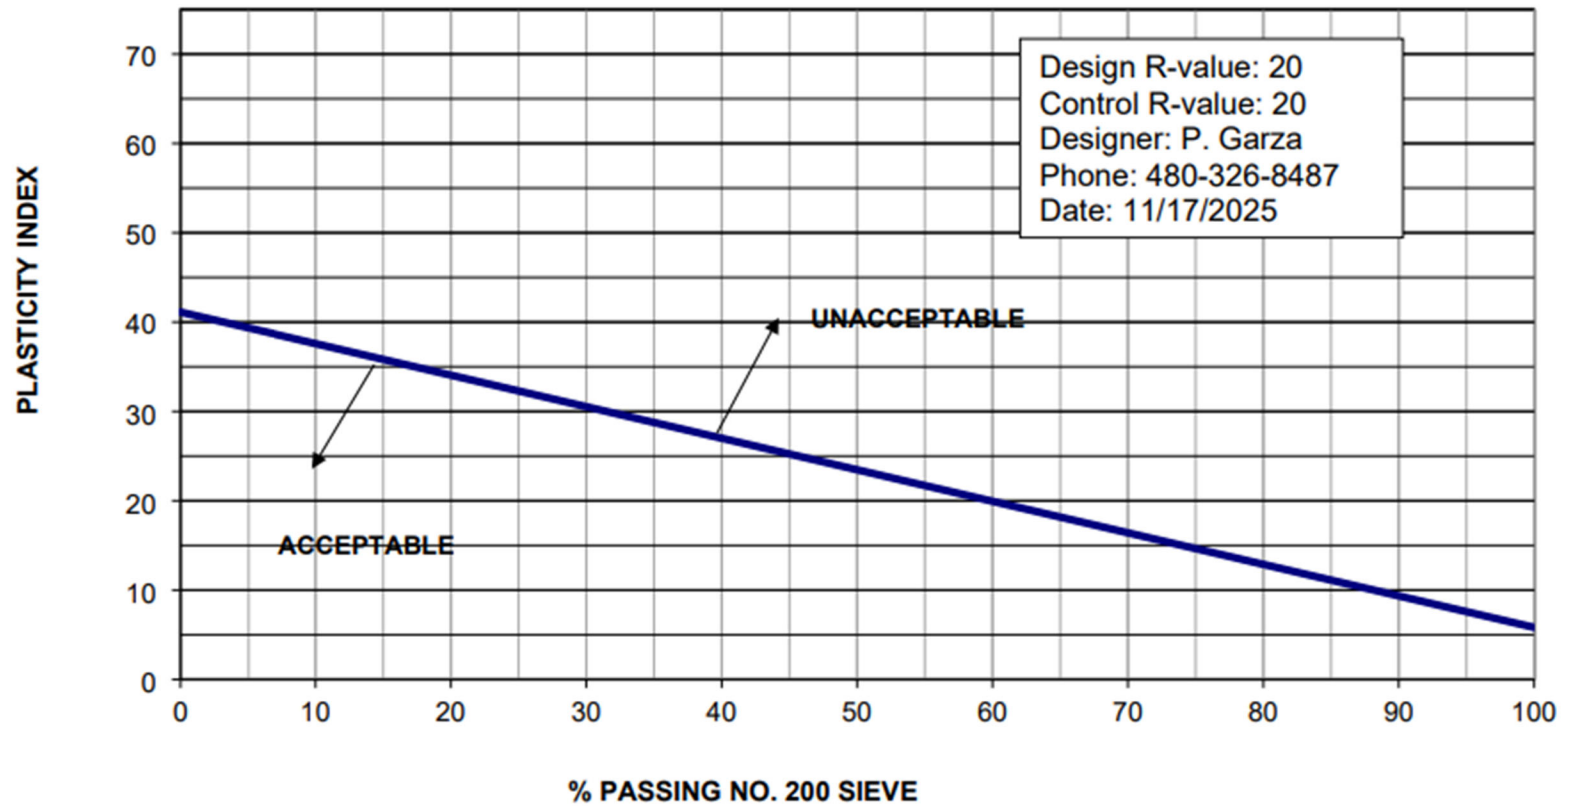

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Non-segregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion
- XI. Certification Regarding Use of Contract Funds for Lobbying
- XII. Use of United States-Flag Vessels:

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under title 23, United States Code, as required in 23 CFR 633.102(b) (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services). 23 CFR 633.102(e).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider. 23 CFR 633.102(e).

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services) in accordance with 23 CFR 633.102. The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in solicitation-for-bids or request-for-proposals documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract). 23 CFR 633.102(b).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work

performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract. 23 CFR 633.102(d).

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. 23 U.S.C. 114(b). The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors. 23 U.S.C. 101(a).

II. NONDISCRIMINATION (23 CFR 230.107(a); 23 CFR Part 230, Subpart A, Appendix A; EO 11246)

The provisions of this section related to 23 CFR Part 230, Subpart A, Appendix A are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR Part 60, 29 CFR Parts 1625-1627, 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR Part 60, and 29 CFR Parts 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), and Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR Part 230, Subpart A, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal Employment Opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (see 28 CFR Part 35, 29 CFR Part 1630, 29 CFR Parts 1625-1627, 41 CFR Part 60 and 49 CFR Part 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140, shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR Part 35 and 29 CFR Part 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract. 23 CFR 230.409 (g)(4) & (5).

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, sexual orientation, gender identity, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action or are substantially involved in such action, will be made fully cognizant of and will implement the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer or other knowledgeable company official.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, sexual orientation, gender identity, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to ensure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action

within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs (i.e., apprenticeship and on-the-job training programs for the geographical area of contract performance). In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. 23 CFR 230.409. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide

sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants /

Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established thereunder. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment:

The contractor shall not discriminate on the grounds of race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors, suppliers, and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurances Required:

a. The requirements of 49 CFR Part 26 and the State DOT's FHWA-approved Disadvantaged Business Enterprise (DBE) program are incorporated by reference.

b. The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:

- (1) Withholding monthly progress payments;
- (2) Assessing sanctions;
- (3) Liquidated damages; and/or
- (4) Disqualifying the contractor from future bidding as non-responsible.

c. The Title VI and nondiscrimination provisions of U.S. DOT Order 1050.2A at Appendixes A and E are incorporated by reference. 49 CFR Part 21.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women.

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on [Form FHWA-1391](#). The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of more than \$10,000. 41 CFR 60-1.5.

As prescribed by 41 CFR 60-1.8, the contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, sexual orientation, gender identity, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location under the contractor's control where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size), in accordance with 29 CFR 5.5. The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. 23 U.S.C. 113. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. 23 U.S.C. 101. Where applicable law requires that projects be treated as a project on a Federal-aid highway, the provisions of this subpart will apply regardless of the location of the project. Examples include: Surface Transportation Block Grant Program projects funded under 23 U.S.C. 133 [excluding recreational trails projects], the Nationally Significant Freight and Highway

Projects funded under 23 U.S.C. 117, and National Highway Freight Program projects funded under 23 U.S.C. 167.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages (29 CFR 5.5)

a. *Wage rates and fringe benefits.* All laborers and mechanics employed or working upon the site of the work (or otherwise working in construction or development of the project under a development statute), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act ([29 CFR part 3](#))), the full amount of basic hourly wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics. As provided in paragraphs (d) and (e) of 29 CFR 5.5, the appropriate wage determinations are effective by operation of law even if they have not been attached to the contract. Contributions made or costs reasonably anticipated for bona fide fringe benefits under the Davis-Bacon Act ([40 U.S.C. 3141\(2\)\(B\)](#)) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.e. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics must be paid the appropriate wage rate and fringe benefits on the wage determination for the classification(s) of work actually performed, without regard to skill, except as provided in paragraph 4. of this section. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided*, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph 1.c. of this section) and the Davis-Bacon poster (WH-1321) must be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. *Frequently recurring classifications.* (1) In addition to wage and fringe benefit rates that have been determined to be prevailing under the procedures set forth in [29 CFR part 1](#), a wage determination may contain, pursuant to § 1.3(f), wage and fringe benefit rates for classifications of laborers and mechanics for which conformance requests are regularly submitted pursuant to paragraph 1.c. of this section, provided that:

(i) The work performed by the classification is not performed by a classification in the wage determination for which a prevailing wage rate has been determined;

(ii) The classification is used in the area by the construction industry; and

(iii) The wage rate for the classification bears a reasonable relationship to the prevailing wage rates contained in the wage determination.

(2) The Administrator will establish wage rates for such classifications in accordance with paragraph 1.c.(1)(iii) of this section. Work performed in such a classification must be paid at no less than the wage and fringe benefit rate listed on the wage determination for such classification.

c. *Conformance.* (1) The contracting officer must require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract be classified in conformance with the wage determination. Conformance of an additional classification and wage rate and fringe benefits is appropriate only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is used in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) The conformance process may not be used to split, subdivide, or otherwise avoid application of classifications listed in the wage determination.

(3) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken will be sent by the contracting officer by email to DBAconformance@dol.gov. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer will, by email to DBAconformance@dol.gov, refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(5) The contracting officer must promptly notify the contractor of the action taken by the Wage and Hour Division

under paragraphs 1.c.(3) and (4) of this section. The contractor must furnish a written copy of such determination to each affected worker or it must be posted as a part of the wage determination. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 1.c.(3) or (4) of this section must be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

d. *Fringe benefits not expressed as an hourly rate.* Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor may either pay the benefit as stated in the wage determination or may pay another bona fide fringe benefit or an hourly cash equivalent thereof.

e. *Unfunded plans.* If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided*, That the Secretary of Labor has found, upon the written request of the contractor, in accordance with the criteria set forth in § 5.28, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

f. *Interest.* In the event of a failure to pay all or part of the wages required by the contract, the contractor will be required to pay interest on any underpayment of wages.

2. Withholding (29 CFR 5.5)

a. *Withholding requirements.* The contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for the full amount of wages and monetary relief, including interest, required by the clauses set forth in this section for violations of this contract, or to satisfy any such liabilities required by any other Federal contract, or federally assisted contract subject to Davis-Bacon labor standards, that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to Davis-Bacon labor standards requirements and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld. In the event of a contractor's failure to pay any laborer or mechanic, including any apprentice or helper working on the site of the work all or part of the wages required by the contract, or upon the contractor's failure to submit the required records as discussed in paragraph 3.d. of this section, the contracting agency may on its own initiative and after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with paragraph

2.a. of this section or Section V, paragraph 3.a., or both, over claims to those funds by:

- (1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;
- (2) A contracting agency for its procurement costs;
- (3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;
- (4) A contractor's assignee(s);
- (5) A contractor's successor(s); or
- (6) A claim asserted under the Prompt Payment Act, [31 U.S.C. 3901–3907](#).

3. Records and certified payrolls (29 CFR 5.5)

a. Basic record requirements (1) Length of record retention. All regular payrolls and other basic records must be maintained by the contractor and any subcontractor during the course of the work and preserved for all laborers and mechanics working at the site of the work (or otherwise working in construction or development of the project under a development statute) for a period of at least 3 years after all the work on the prime contract is completed.

(2) Information required. Such records must contain the name; Social Security number; last known address, telephone number, and email address of each such worker; each worker's correct classification(s) of work actually performed; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in [40 U.S.C. 3141\(2\)\(B\)](#) of the Davis-Bacon Act); daily and weekly number of hours actually worked in total and on each covered contract; deductions made; and actual wages paid.

(3) Additional records relating to fringe benefits. Whenever the Secretary of Labor has found under paragraph 1.e. of this section that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in [40 U.S.C. 3141\(2\)\(B\)](#) of the Davis-Bacon Act, the contractor must maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits.

(4) Additional records relating to apprenticeship. Contractors with apprentices working under approved programs must maintain written evidence of the registration of apprenticeship programs, the registration of the apprentices, and the ratios and wage rates prescribed in the applicable programs.

b. Certified payroll requirements (1) Frequency and method of submission. The contractor or subcontractor must submit weekly, for each week in which any DBA- or Related Acts-covered work is performed, certified payrolls to the contracting

agency. The prime contractor is responsible for the submission of all certified payrolls by all subcontractors. A contracting agency or prime contractor may permit or require contractors to submit certified payrolls through an electronic system, as long as the electronic system requires a legally valid electronic signature; the system allows the contractor, the contracting agency, and the Department of Labor to access the certified payrolls upon request for at least 3 years after the work on the prime contract has been completed; and the contracting agency or prime contractor permits other methods of submission in situations where the contractor is unable or limited in its ability to use or access the electronic system.

(2) Information required. The certified payrolls submitted must set out accurately and completely all of the information required to be maintained under paragraph 3.a.(2) of this section, except that full Social Security numbers and last known addresses, telephone numbers, and email addresses must not be included on weekly transmittals. Instead, the certified payrolls need only include an individually identifying number for each worker (e.g., the last four digits of the worker's Social Security number). The required weekly certified payroll information may be submitted using Optional Form WH-347 or in any other format desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division website at <https://www.dol.gov/sites/dolgov/files/WHDL/legacy/files/wh347.pdf> or its successor website. It is not a violation of this section for a prime contractor to require a subcontractor to provide full Social Security numbers and last known addresses, telephone numbers, and email addresses to the prime contractor for its own records, without weekly submission by the subcontractor to the contracting agency.

(3) Statement of Compliance. Each certified payroll submitted must be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor, or the contractor's or subcontractor's agent who pays or supervises the payment of the persons working on the contract, and must certify the following:

(i) That the certified payroll for the payroll period contains the information required to be provided under paragraph 3.b. of this section, the appropriate information and basic records are being maintained under paragraph 3.a. of this section, and such information and records are correct and complete;

(ii) That each laborer or mechanic (including each helper and apprentice) working on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in [29 CFR part 3](#); and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification(s) of work actually performed, as specified in the applicable wage determination incorporated into the contract.

(4) Use of Optional Form WH-347. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 will satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(3) of this section.

(5) *Signature.* The signature by the contractor, subcontractor, or the contractor's or subcontractor's agent must be an original handwritten signature or a legally valid electronic signature.

(6) *Falsification.* The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under [18 U.S.C. 1001](#) and [31 U.S.C. 3729](#).

(7) *Length of certified payroll retention.* The contractor or subcontractor must preserve all certified payrolls during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

c. *Contracts, subcontracts, and related documents.* The contractor or subcontractor must maintain this contract or subcontract and related documents including, without limitation, bids, proposals, amendments, modifications, and extensions. The contractor or subcontractor must preserve these contracts, subcontracts, and related documents during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

d. *Required disclosures and access* (1) *Required record disclosures and access to workers.* The contractor or subcontractor must make the records required under paragraphs 3.a. through 3.c. of this section, and any other documents that the contracting agency, the State DOT, the FHWA, or the Department of Labor deems necessary to determine compliance with the labor standards provisions of any of the applicable statutes referenced by § 5.1, available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and must permit such representatives to interview workers during working hours on the job.

(2) *Sanctions for non-compliance with records and worker access requirements.* If the contractor or subcontractor fails to submit the required records or to make them available, or refuses to permit worker interviews during working hours on the job, the Federal agency may, after written notice to the contractor, sponsor, applicant, owner, or other entity, as the case may be, that maintains such records or that employs such workers, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available, or to permit worker interviews during working hours on the job, may be grounds for debarment action pursuant to § 5.12. In addition, any contractor or other person that fails to submit the required records or make those records available to WHD within the time WHD requests that the records be produced will be precluded from introducing as evidence in an administrative proceeding under [29 CFR part 6](#) any of the required records that were not provided or made available to WHD. WHD will take into consideration a reasonable request from the contractor or person for an extension of the time for submission of records. WHD will determine the reasonableness of the request and may consider, among other things, the location of the records and the volume of production.

(3) *Required information disclosures.* Contractors and subcontractors must maintain the full Social Security number and last known address, telephone number, and email address

of each covered worker, and must provide them upon request to the contracting agency, the State DOT, the FHWA, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or other compliance action.

4. Apprentices and equal employment opportunity (29 CFR 5.5)

a. *Apprentices (1) Rate of pay.* Apprentices will be permitted to work at less than the predetermined rate for the work they perform when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship (OA), or with a State Apprenticeship Agency recognized by the OA. A person who is not individually registered in the program, but who has been certified by the OA or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice, will be permitted to work at less than the predetermined rate for the work they perform in the first 90 days of probationary employment as an apprentice in such a program. In the event the OA or a State Apprenticeship Agency recognized by the OA withdraws approval of an apprenticeship program, the contractor will no longer be permitted to use apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(2) *Fringe benefits.* Apprentices must be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe benefits must be paid in accordance with that determination.

(3) *Apprenticeship ratio.* The allowable ratio of apprentices to journeyworkers on the job site in any craft classification must not be greater than the ratio permitted to the contractor as to the entire work force under the registered program or the ratio applicable to the locality of the project pursuant to paragraph 4.a.(4) of this section. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in paragraph 4.a.(1) of this section, must be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under this section must be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(4) *Reciprocity of ratios and wage rates.* Where a contractor is performing construction on a project in a locality other than the locality in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyworker's hourly rate) applicable within the locality in which the construction is being performed must be observed. If there is no applicable ratio or wage rate for the locality of the project, the ratio and wage rate specified in the contractor's registered program must be observed.

b. *Equal employment opportunity.* The use of apprentices and journeyworkers under this part must be in conformity with

the equal employment opportunity requirements of Executive Order 11246, as amended, and [29 CFR part 30](#).

c. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. 23 CFR 230.111(e)(2). The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeyworkers shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract as provided in 29 CFR 5.5.

6. Subcontracts. The contractor or subcontractor must insert FHWA-1273 in any subcontracts, along with the applicable wage determination(s) and such other clauses or contract modifications as the contracting agency may by appropriate instructions require, and a clause requiring the subcontractors to include these clauses and wage determination(s) in any lower tier subcontracts. The prime contractor is responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in this section. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and may be subject to debarment, as appropriate. 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract as provided in 29 CFR 5.5.

9. Disputes concerning labor standards. As provided in 29 CFR 5.5, disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility. a. By entering into this contract, the contractor certifies that neither it nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of [40 U.S.C. 3144\(b\)](#) or § 5.12(a).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of [40 U.S.C. 3144\(b\)](#) or § 5.12(a).

c. The penalty for making false statements is prescribed in the U.S. Code, Title 18 Crimes and Criminal Procedure, [18 U.S.C. 1001](#).

11. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#);

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#);

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#); or

d. Informing any other person about their rights under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#).

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

Pursuant to 29 CFR 5.5(b), the following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchpersons and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek. 29 CFR 5.5.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph 1. of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages and interest from the date of the underpayment. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or

mechanic, including watchpersons and guards, employed in violation of the clause set forth in paragraph 1. of this section, in the sum currently provided in 29 CFR 5.5(b)(2)* for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1. of this section.

* \$31 as of January 15, 2023 (See 88 FR 88 FR 2210) as may be adjusted annually by the Department of Labor, pursuant to the Federal Civil Penalties Inflation Adjustment Act of 1990.

3. Withholding for unpaid wages and liquidated damages

a. *Withholding process.* The FHWA or the contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for any unpaid wages; monetary relief, including interest; and liquidated damages required by the clauses set forth in this section on this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to the Contract Work Hours and Safety Standards Act and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with Section IV paragraph 2.a. or paragraph 3.a. of this section, or both, over claims to those funds by:

- (1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;
- (2) A contracting agency for its procurement costs;
- (3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;
- (4) A contractor's assignee(s);
- (5) A contractor's successor(s); or
- (6) A claim asserted under the Prompt Payment Act, [31 U.S.C. 3901](#)–3907.

4. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs 1. through 5. of this section and a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor is responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1. through 5. In the

event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and associated liquidated damages and may be subject to debarment, as appropriate.

5. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

- a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the Contract Work Hours and Safety Standards Act (CWHSSA) or its implementing regulations in this part;
- b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under CWHSSA or this part;
- c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under CWHSSA or this part; or
- d. Informing any other person about their rights under CWHSSA or this part.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System pursuant to 23 CFR 635.116.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" in paragraph 1 of Section VI refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions: (based on longstanding interpretation)

- (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract. 23 CFR 635.102.

2. Pursuant to 23 CFR 635.116(a), the contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. Pursuant to 23 CFR 635.116(c), the contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract. (based on long-standing interpretation of 23 CFR 635.116).

5. The 30-percent self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements. 23 CFR 635.116(d).

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR Part 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract. 23 CFR 635.108.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and

health standards (29 CFR Part 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704). 29 CFR 1926.10.

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR Part 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 11, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT (42 U.S.C. 7606; 2 CFR 200.88; EO 11738)

This provision is applicable to all Federal-aid construction contracts in excess of \$150,000 and to all related subcontracts. 48 CFR 2.101; 2 CFR 200.327.

By submission of this bid/proposal or the execution of this contract or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, subcontractor, supplier, or vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251-1387). Violations must be reported to the Federal Highway Administration and the Regional Office of the Environmental Protection Agency. 2 CFR Part 200, Appendix II.

The contractor agrees to include or cause to be included the requirements of this Section in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements. 2 CFR 200.327.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200. 2 CFR 180.220 and 1200.220.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction. 2 CFR 180.320.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default. 2 CFR 180.325.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances. 2 CFR 180.345 and 180.350.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900-180.1020, and 1200. "First Tier Covered Transactions" refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction. 2 CFR 180.330.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold. 2 CFR 180.220 and 180.300.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. 2 CFR 180.300; 180.320, and 180.325. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. 2 CFR 180.335. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (<https://www.sam.gov/>). 2 CFR 180.300, 180.320, and 180.325.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default. 2 CFR 180.325.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.335;.

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State, or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property, 2 CFR 180.800;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification, 2 CFR 180.700 and 180.800; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default. 2 CFR 180.335(d).

(5) Are not a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(6) Are not a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability (USDOT Order 4200.6 implementing appropriations act requirements).

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal. 2 CFR 180.335 and 180.340.

3. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders, and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200). 2 CFR 180.220 and 1200.220.

a. By signing and submitting this proposal, the prospective lower tier participant is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances. 2 CFR 180.365.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900 – 180.1020, and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contractor). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated. 2 CFR 1200.220 and 1200.332.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold. 2 CFR 180.220 and 1200.220.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (<https://www.sam.gov/>), which is compiled by the General Services Administration. 2 CFR 180.300, 180.320, 180.330, and 180.335.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily

excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment. 2 CFR 180.325.

* * * * *

4. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals:

(1) is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.355;

(2) is a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(3) is a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability. (USDOT Order 4200.6 implementing appropriations act requirements)

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000. 49 CFR Part 20, App. A.

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or

cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

XII. USE OF UNITED STATES-FLAG VESSELS:

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, or any other covered transaction. 46 CFR Part 381.

This requirement applies to material or equipment that is acquired for a specific Federal-aid highway project. 46 CFR 381.7. It is not applicable to goods or materials that come into inventories independent of an FHWA funded-contract.

When oceanic shipments (or shipments across the Great Lakes) are necessary for materials or equipment acquired for a specific Federal-aid construction project, the bidder, proposer, contractor, subcontractor, or vendor agrees:

1. To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. 46 CFR 381.7.

2. To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b)(1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Office of Cargo and Commercial Sealift (MAR-620), Maritime Administration, Washington, DC 20590. (MARAD requires copies of the ocean carrier's (master) bills of lading, certified onboard, dated, with rates and charges. These bills of lading may contain business sensitive information and therefore may be submitted directly to MARAD by the Ocean Transportation Intermediary on behalf of the contractor). 46 CFR 381.7.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS
PREFERENCE FOR APPALACHIAN DEVELOPMENT
HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS
ROAD CONTRACTS (23 CFR 633, Subpart B, Appendix B)**

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

**STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY
CONSTRUCTION CONTRACT SPECIFICATIONS
EXECUTIVE ORDER 11246, July 1, 1978**

(Revised November 3, 1980)

1. As used in these specifications:

a. "Covered area" means the geographical area described in the solicitation from which this contract resulted:

b. "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority:

c. "Employer Identification Number" means the Federal Social Security Number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

d. "Minority" includes:

(i) Black (all persons having origins in any of the Black African racial groups not of Hispanic origin):

(ii) Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish Culture or origin, regardless of race):

(iii) Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and

(iv) American Indian or Alaskan Native (all persons having origins in any of the original peoples of North America and maintaining identifiable tribal affiliations through membership or participation or community identification).

2. Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of \$10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.

3. If the Contractor is participating (pursuant to 41 CFR 60-4.5) in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown plan. Each Contractor or Subcontractor participating in an approved plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other Contractors or Subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or Subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.

4. The Contractor shall implement the specific affirmative action standards provided in paragraphs 7 a through p of these specifications. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each

construction trade in which it has employees in the covered area

5. Neither the provisions of any collective bargaining agreement, nor the failure by a union with whom the Contractor has collective bargaining agreement, to refer either minorities or women shall excuse the Contractor's obligations under these specifications. Executive Order 11246, or the regulations promulgated pursuant thereto.

6. In order for the nonworking training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.

7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully, and shall implement affirmative action steps at least as extensive as the following:

a. Ensure and maintain a working environment free of harassment, intimidation, and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such site or in such facilities.

b. Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available, and maintain a record of the organizations' responses.

c. Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefor, along with whatever additional actions the Contractor may have taken.

d. Provide immediate written notification to the Director when the union or unions with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority person or women sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.

e. Develop on the job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources complied under 7b above.

f. Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations: by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.

g. Review, at least annually the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with on site supervisory personnel such as Superintendents, General Foremen, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

h. Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the Contractor's EEO policy with other Contractors and Subcontractors with whom the Contractor does or anticipates doing business.

i. Direct its recruitment efforts, both oral and written to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notification to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.

j. Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer, and vacation employment to minority and female youth both on the site and in other areas of a Contractor's workforce.

k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.

l. Conduct, at least annually, an inventory and evaluation at least of all minority and

female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

m. Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.

n. Ensure that all facilities and company activities are nonsegregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.

o. Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

p. Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.

8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative actions obligations (7a through p). The efforts of a contractor association, joint contractor- union, contractor community, or other similar group of which the contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under 7a through p of these Specifications provided that the contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program are reflected in the Contractor's minority and female workforce participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply, however, is the Contractor's and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's noncompliance.

9. A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specific minority group of women is under utilized).

10. The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex, or national origin.

11. The Contractor shall not enter into any Subcontract with any person or firm

debarred from Government Contracts pursuant to Executive Order 11246.

12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, termination, and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps at least as extensive as those standards prescribed in paragraph 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41 CFR 60-4.8.

14. The Contractor shall designate a responsible official to monitor all employment related activity to ensure that the company EEO policy is being carried out, to submit reports relating to provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade, union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.

15. Nothing herein provided shall be construed as an imitation upon the application of other laws which establish different standards of compliance or upon the application of requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

TITLE VI / NON-DISCRIMINATION ASSURANCES

APPENDIX A

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

1. **Compliance with Regulations:** The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, the *Federal Highway Administration*, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.
2. **Non-discrimination:** The contractor, with regard to the work performance by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.
3. **Solicitations for Subcontracts, Including Procurements of Materials and Equipment:** In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and Regulations relative to Non-discrimination on the grounds of race, color, or national origin.
4. **Information and Reports:** The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the *Federal Highway Administration* to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the *Federal Highway Administration*, as appropriate, and will set forth what efforts it has made to obtain the information.
5. **Sanctions for Noncompliance:** In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the *Federal Highway Administration*, may determine to be appropriate, including, but not limited to:
 - a. withholding payments to the contractor under the contract until the contractor complies; and/or
 - b. cancelling, terminating, or suspending a contract, in whole or in part.
6. **Incorporation of Provisions:** The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with request to any subcontract or procurement as the Recipient or the *Federal Highway Administration* may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

TITLE VI / NON-DISCRIMINATION ASSURANCES

APPENDIX E

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Pertinent Non-Discrimination Authorities:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1687 *et. seq.*).

NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION
TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY
(EXECUTIVE ORDER 11246)

JULY 1, 1978 (Revised November 3, 1980)

(Revised April 15, 1981)

1. The bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate work force in each trade on all construction work in the covered area, are as follows:

	Minority	Female
Tucson and balance of Pima County Cochise, Graham, Greenlee and Santa Cruz Counties	24.1 27.0	6.9 6.9
Phoenix and balance of Maricopa County Apache, Coconino, Gila, Mohave, Navajo, Pinal, Yavapai and Yuma Counties	15.8 19.6	6.9 6.9

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in all areas where he has Federal or federally assisted work.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3 (a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

EQUAL EMPLOYMENT OPPORTUNITY
COMPLIANCE REPORTS

(Project, Training and Annual)

Federal-Aid Projects

February 1, 1977; Revised July 1, 1978; Revised November 3, 1980
Revised April 15, 1981; Revised September 7, 1983
Revised October 15, 1998; Revised August, 1, 2005;
Revised March 1, 2015

ANNUAL REPORT:

For each contract in the amount of \$10,000 or more, and for each subcontract, regardless of tier not including material suppliers, in the amount of \$10,000 or more, the contractor and each subcontractor regardless of tier shall submit an annual Equal Employment Opportunity (EEO) Report containing all the information required on Form FHWA-1391. Contractors and subcontractors are required to submit the required information through the LCPtracker system, a labor compliance software monitoring certified payroll and prevailing wage.

The staffing figures to be reported should represent the project workforce on board in all or any part of the last payroll period preceding the end of July.

The report shall be submitted no later than September 1.

"General Decision Number: AZ20260049 05/18/2026

State: Arizona

Construction Types: Highway

Counties: Arizona Counties of
Yavapai

Modification Number	Publication Date
0	01/02/2026
1	05/18/2026

CARP1912-002 07/01/2024

Rates

Fringes

CARPENTER.....\$ 35.89
14.98

ENGI0012-046 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: BULLDOZER.....\$ 35.56
18.12

ENGI0012-051 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: PAVER/SPREADER/FINISH
EQUIPMENT (ASPHALT, AGGREGATE, & CONCRETE).....\$ 35.56
18.12

ENGI0012-052 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: SCRAPER.....\$ 35.56
18.12

ENGI0012-053 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: TRACTOR.....\$ 35.56
18.12

ENGI0012-057 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: (DRILL RIG/AUGER).....\$ 36.64
18.12

ENGI0012-064 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: BOBCAT/SKID STEER/SKID
LOADER.....\$ 32.29
18.12

ENGI0012-066 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: BACKHOE/BACKHOE & LOADER
COMBO/TRACK BACKHOE.....\$ 35.56
18.12

ENGI0012-067 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: COMPACTOR/ROLLER.....\$ 35.56
18.12

ENGI0012-069 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: LOADER/FRONT END LOADER...\$ 35.56
18.12

ENGI0012-070 12/01/2024

Rates

Fringes

TRUCK DRIVER: OFF ROAD TRUCK.....\$ 35.56

18.12

ENGI0012-071 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: CRANE/DERRICK.....\$ 36.64

18.12

ENGI0012-072 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: EXCAVATOR/TRACKHOE
(GREATER THAN 1/2 CUBIC YARD).....\$ 36.64

18.12

POWER EQUIPMENT OPERATOR: EXCAVATOR/TRACKHOE (1/2
CUBIC YARD OR SMALLER).....\$ 35.56

18.12

ENGI0012-074 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: MOTOR GRADER/BLADE.....\$ 36.64

18.12

ENGI0012-075 12/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: MECHANIC.....\$ 37.67

18.12

LABO1184-016 06/01/2025

Rates

Fringes

POWER EQUIPMENT OPERATOR: HORIZONTAL DIRECTIONAL
DRILL.....\$ 31.98

9.26

LABO1184-017 06/01/2025

	Rates
Fringes	
LABORER: FENCE ERECTOR.....	\$ 27.41
9.26	

LABO1184-018 06/01/2025

	Rates
Fringes	
LABORER: GRADE SETTER.....	\$ 27.41
9.26	

LABO1184-021 06/01/2025

	Rates
Fringes	
TRAFFIC CONTROL.....	\$ 27.41
9.26	

LABO1184-025 06/01/2025

	Rates
Fringes	
LABORER: ASPHALT, INCLUDES RAKER, SHOVELER, SPREADER AND DISTRIBUTOR.....	\$ 29.91
9.26	

LABO1184-033 06/01/2025

	Rates
Fringes	
POWER EQUIPMENT OPERATOR: TRENCHER.....	\$ 30.88
9.26	

LABO1184-039 06/01/2025

	Rates
Fringes	
LABORER: GENERAL.....	\$ 27.41
9.26	

LABO1184-041 06/01/2025

	Rates
Fringes	
LABORER: MASON TENDER.....	\$ 27.41
9.26	

LABO1184-044 06/01/2025

Rates

Fringes

POWER EQUIPMENT OPERATOR: FORKLIFT.....\$ 30.88
9.26

LABO1184-047 06/01/2025

Rates

Fringes

TRUCK DRIVER: CONCRETE.....\$ 30.88
9.26

LABO1184-048 06/01/2025

Rates

Fringes

TRUCK DRIVER: DUMP.....\$ 30.88
9.26

LABO1184-049 06/01/2025

Rates

Fringes

TRUCK DRIVER: WATER.....\$ 30.88
9.26

SUAZ2023-026 11/19/2024

Rates

Fringes

TRUCK DRIVER: SWEEPER.....\$ 20.24
5.48

TRUCK DRIVER: OIL DISTRIBUTOR.....\$ 29.75
8.04

POWER EQUIPMENT OPERATOR: OILER.....\$ 31.56
10.69

POWER EQUIPMENT OPERATOR: MILLING MACHINE.....\$ 30.09
6.45

POWER EQUIPMENT OPERATOR: GRADE CHECKER.....\$ 29.74
13.07

POWER EQUIPMENT OPERATOR: FIELD EQUIPMENT
SERVICEPERSON.....\$ 35.39
11.50

POWER EQUIPMENT OPERATOR: CONCRETE SCREED.....\$ 25.70
7.15

POWER EQUIPMENT OPERATOR: CONCRETE PUMP TRUCK.....	\$ 43.11
10.87	
POWER EQUIPMENT OPERATOR: BROOM/SWEEPER.....	\$ 26.47
7.26	
POWER EQUIPMENT OPERATOR: BOOM/CRANE TRUCK.....	\$ 43.11
10.87	
PAINTER: SIGN AND DISPLAY ERECTOR.....	\$ 18.03
0.00	
PAINTER: PAVEMENT MARKING.....	\$ 24.60
6.34	
LABORER: PIPELAYER.....	\$ 25.85
7.09	
LABORER: LANDSCAPE LABORER.....	\$ 18.03
0.00	
LABORER: CONCRETE SAW (HAND HELD/WALK BEHIND).....	\$ 25.22
5.08	
IRONWORKER.....	\$ 33.15
18.57	
ELECTRICIAN.....	\$ 29.00
7.58	
CEMENT MASON/CONCRETE FINISHER.....	\$ 30.09
0.00	

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year.

Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at <https://www.dol.gov/agencies/whd/government-contracts>.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least \$13.65 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract from May 11, 2026, through December 31, 2026. The applicable Executive Order minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than **❖SU❖**, **❖UAVG❖**, **❖SA❖**, or **❖SC❖** denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the

classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE:

UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The **◆SU◆** identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

◆SU◆ wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The **◆SA◆** identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications

and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the **SA** identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

- a) a survey underlying a wage determination
- b) an existing published wage determination
- c) an initial WHD letter setting forth a position on a wage determination matter
- d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment

data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

=====
END OF GENERAL DECISION

"



ARIZONA DEPARTMENT OF TRANSPORTATION
PROJECT DELIVERY AND OPERATIONS DIVISION
CONTRACTS AND SPECIFICATIONS GROUP

BID SCHEDULE

CONTRACT # 2025126

TRACS No.	Project No.	Item	County	District	Gross Length	Net Length	Prepared By:
089A YV 362 F062401C	A89-B-(225)T	103629	YAVAPAI	NORTHCENT	0.7		Farhana Jesmin

Highway Termini	Location	Work Description
• PRESCOTT – FLAGSTAFF HIGHWAY (SR 89A)	• SR 89A AT PAGE SPRINGS ROAD	• RECONSTRUCT PAGE SPRINGS ROAD INTERSECTION

BID SCHEDULE**089A YV 362 F062401C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
2010011	CLEARING AND GRUBBING	ACRE	4		
2020029	REMOVAL OF ASPHALTIC CONCRETE PAVEMENT	SQ.YD.	5,634		
2020041	REMOVAL OF PIPE	L.FT.	2		
2020045	REMOVAL OF RIPRAP	CU.YD.	347		
2020053	REMOVE (FLARED END SECTION)	EACH	1		
2020054	REMOVE (SIGN ASSEMBLY)	EACH	29		
2020075	REMOVE BITUMINOUS PAVEMENT (MICRO-MILLING)	SQ.YD.	26,012		
2020115	REMOVE (SIGN PANEL)	EACH	1		
2020157	REMOVE (EXISTING LIGHT POLE)	EACH	2		
2020158	REMOVE (LIGHTING PULL BOX)	EACH	4		
2020159	REMOVE (LED LUMINAIRE)	EACH	3		
2030301	ROADWAY EXCAVATION	CU.YD.	2,229		
2030302	ROADWAY EXCAVATION (OVEREXCAVATION)	CU.YD.	5,730		
2030401	DRAINAGE EXCAVATION	CU.YD.	699		
2030904	BORROW (IN PLACE)	CU.YD.	2,251		

BID SCHEDULE**089A YV 362 F062401C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
3030021	AGGREGATE BASE, CLASS 1	CU.YD.	1,514		
4040076	EMULSIFIED ASPHALT (MICRO-SURFACING)	TON	98		
4040171	DRY MINERAL AGGREGATE (MICRO-SURFACING) (TYPE III)	TON	752		
4090006	ASPHALTIC CONCRETE (MISCELLANEOUS STRUCTURAL) (SPECIAL MIX)	TON	1,294		
5010011	PIPE, CORRUGATED METAL, 24"	L.FT.	125		
5010025	PIPE, CORRUGATED METAL, 36"	L.FT.	10		
5014024	FLARED END SECTION, 24" (C-13.25)	EACH	2		
5014636	METAL SAFETY END SECTION (36")	EACH	1		
6070002	BREAKAWAY SIGN POST S4X7.7	L.FT.	46		
6070004	BREAKAWAY SIGN POST W6X12	L.FT.	57		
6070022	FOUNDATION FOR BREAKAWAY SIGN POST S4X7.7	EACH	4		
6070024	FOUNDATION FOR BREAKAWAY SIGN POST W6X12	EACH	4		
6070038	SLIP BASE	EACH	37		
6070055	SIGN POST (PERFORATED) (2 1/2 S)	L.FT.	184		

BID SCHEDULE**089A YV 362 F062401C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
6070057	SIGN POST (PERFORATED) (2 1/2 T)	L.FT.	462		
6070060	FOUNDATION FOR SIGN POST (CONCRETE)	EACH	61		
6080005	REGULATORY, WARNING, OR MARKER SIGN PANEL	SQ.FT.	325		
6080018	EXTRUDED ALUMINUM SIGN PANEL	SQ.FT.	228		
6080025	FLAT SHEET ALUMINUM SIGN PANEL	SQ.FT.	136		
6080110	REMOVE AND REINSTALL SIGN	EACH	1		
7016030	BARRICADE (TYPE 1, TYPE 2, VERT.PANEL, TUBULAR MARKER)	EACH-DAY	15,042		
7016033	PORTABLE SIGN STAND (SPRING TYPE)	EACH-DAY	2,163		
7016035	WARNING LIGHT (TYPE A)	EACH-DAY	2,339		
7016037	WARNING LIGHT (TYPE C)	EACH-DAY	15,042		
7016039	EMBEDDED SIGN POST	EACH-DAY	2,280		
7016050	TRUCK-MOUNTED ATTENUATOR	EACH-DAY	225		
7016051	TEMPORARY SIGN (LESS THAN 10 S.F.)	EACH-DAY	396		
7016052	TEMPORARY SIGN (10 S.F. OR MORE)	EACH-DAY	4,087		
7016061	FLASHING ARROW PANEL	EACH-DAY	201		

BID SCHEDULE**089A YV 362 F062401C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
7016067	CHANGEABLE MESSAGE BOARD (CONTRACTOR FURNISHED)	EACH-DAY	332		
7016082	FLAGGING SERVICES (LOCAL ENFORCEMENT OFFICER)(WITH AGENCY VEHICLE)	HOUR	104		
7080201	WATERBORNE-TYPE I PAVEMENT MARKING (PAINTED) (WHITE)	L.FT.	11,711		
7080202	WATERBORNE-TYPE I PAVEMENT MARKING (PAINTED) (YELLOW)	L.FT.	6,817		
7080206	WATERBORNE-TYPE I PAVEMENT MARKING (PAINTED SYMBOL) (ARROW)	EACH	12		
7080207	WATERBORNE-TYPE I PAVEMENT MARKING (PAINTED LEGEND) (STOP/AHEAD)	EACH	2		
7080208	WATERBORNE-TYPE I PAVEMENT MARKING (PAINTED LEGEND) (ONLY)	EACH	4		
7090001	DUAL COMPONENT PAVEMENT MARKING (WHITE EPOXY)	L.FT.	19,246		
7090002	DUAL COMPONENT PAVEMENT MARKING (YELLOW EPOXY)	L.FT.	10,424		
7090005	DUAL COMPONENT PAVEMENT MARKING (TRANSVERSE)	L.FT.	113		
7090010	DUAL COMPONENT PAVEMENT LEGEND	EACH	6		

BID SCHEDULE**089A YV 362 F062401C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
7090012	DUAL COMPONENT PAVEMENT SYMBOL	EACH	12		
7310070	POLE (TYPE G) (STANDARD BASE)	EACH	17		
7310197	BREAKAWAY BASE FOR LIGHTING POLE OR SIGNAL FLASHER	EACH	17		
7310260	POLE FOUNDATION (TYPE G) (STANDARD BASE)	EACH	17		
7310652	MAST ARM (10 FT) (ALUMINUM)	EACH	17		
7320050	ELECTRICAL CONDUIT (2") (PVC)	L.FT.	2,900		
7320291	ELECTRICAL CONDUIT (2") (HDPE) (DIRECTIONAL DRILL)	L.FT.	90		
7320460	PULL BOX (NO. 4B)	EACH	17		
7320500	CONDUCTOR (NO. 12)	L.FT.	1,400		
7320520	CONDUCTOR (NO. 8)	L.FT.	12,230		
7320585	CONDUCTOR (INSULATED BOND) (NO. 8) (GREEN)	L.FT.	4,125		
7360104	LUMINAIRE (HORIZONTAL MOUNT) (15L) (LED)	EACH	20		
7360236	LOAD CENTER CABINET (LIGHTING) (MODIFY)	EACH	1		
8050003	SEEDING (CLASS II)	ACRE	4		

BID SCHEDULE**089A YV 362 F062401C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
8101021	EROSION CONTROL (WATTLES) (9")	L.FT.	1,457		
8101029	EROSION CONTROL (ROCK MULCH) (DETAIL ES2)	CU.YD.	12		
8101035	EROSION CONTROL (SEDIMENT LOGS) (20")	L.FT.	310		
9010001	MOBILIZATION	L.SUM	1		
9130001	RIPRAP (DUMPED)	CU.YD.	289		
9240050	MISCELLANEOUS WORK (ELECTRICAL RECORD DRAWINGS)	L.SUM	1		
9240129	MISCELLANEOUS WORK (ROADWAY OBLITERATION AND RESTORATION)	SQ.YD.	2,154		
9240170	CONTRACTOR QUALITY CONTROL	L.SUM	1		
9240181	MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS) (MANUAL / MECHANICAL METHODS)	SQ.YD.	9,000		
9240182	MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS) (HERBICIDE)	SQ.YD.	11,000		
9240900	AVOIDANCE AREA PROTECTION PLAN AND MONITORING	L.SUM	1		
9250001	CONSTRUCTION SURVEYING AND LAYOUT	L.SUM	1		

BID SCHEDULE

089A YV 362 F062401C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
9280037	GROUND-IN RUMBLE STRIP (12 INCH)	L.FT.	5,964		

BID SCHEDULE

089A YV 362 F062401C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
RCB CULVERT, NORTH U-TURN STA 51+41					
2030501 A	STRUCTURAL EXCAVATION	CU.YD.	92		
2030506 A	STRUCTURE BACKFILL	CU.YD.	124		
6010002 A	STRUCTURAL CONCRETE (CLASS S) (F'C = 3,000)	CU.YD.	124		
6050002 A	REINFORCING STEEL	LB.	15,350		

BID SCHEDULE

089A YV 362 F062401C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
RCB CULVERT EXTENSION, NB SR 89A STA 527+08					
2020009 B	REMOVAL OF STRUCTURAL CONCRETE	CU.YD.	12		
2030501 B	STRUCTURAL EXCAVATION	CU.YD.	48		
2030506 B	STRUCTURE BACKFILL	CU.YD.	69		
6010002 B	STRUCTURAL CONCRETE (CLASS S) (F'C = 3,000)	CU.YD.	61		
6050002 B	REINFORCING STEEL	LB.	7,850		
6050101 B	PLACE DOWELS	EACH	8		

BID TOTAL :

PROPOSAL

TO THE ARIZONA DEPARTMENT OF TRANSPORTATION:

Gentlemen:

The following Proposal is made for constructing project

089A YV 362 F062401C A89-B(225)T
PRESCOTT-FLAGSTAFF HIGHWAY (SR 89A)
(SR 89A AT PAGE SPRINGS ROAD)

in the State of Arizona.

The following Proposal is made on behalf of _____

_____ and no others.

(NAME OF COMPANY, FIRM, OR CORPORATION)

The undersigned hereby certifies that (s)he has been duly authorized to submit a proposal on behalf of the company, firm, or corporation mentioned above; and further certifies, pursuant to Subsection 112(c) of Title 23, United States Code and Title 44, Chapter 10, Article 1 of the Arizona Revised Statutes, that neither (s)he nor anyone associated with the company, firm, or corporation mentioned above has, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with such project and furthermore that no member or employee of the Arizona Department of Transportation is personally or financially interested, directly or indirectly, in the Proposal, or in any purchase or sale of any materials or supplies for the work to which it relates, or in any portion of the profits thereof.

The undersigned certifies that the approved Plans, Standard Specifications, Special Provisions and forms of Contract and Bond authorized by the Arizona Department of Transportation and constituting essential parts of this proposal, have been carefully examined, and also that the site of the work has been personally inspected. The undersigned declares that the amount and nature of the work to be done is understood and that at no time will misunderstanding of the Plans, Specifications, Special Provisions, or conditions to be overcome, be plead. On the basis of Plans, Specifications, Special Provisions, and the forms of Contract and Bond proposed for use, the undersigned proposes to furnish all the necessary equipment, materials, machinery, tools, apparatus, and other means of construction, and labor to do all the work in the manner specified, and to accept, as full compensation therefor, the sum of the various products obtained by multiplying each unit price, herein bid for the work or materials, by the quantity thereof actually incorporated in the complete project, as determined by the State Engineer. The undersigned understands that the quantities mentioned herein are approximate only and are subject to increase or decrease and hereby proposes to perform all quantities of work as either increased or decreased, in accordance with the provisions of the Specifications, at the unit price bid in the Bidding Schedule.

The undersigned further proposes to perform all extra work that may be required on the basis provided in the Specifications and to give such work personal attention and to secure economical performance.

The undersigned further proposes to execute the Contract Agreement and furnish satisfactory Bond within ten calendar days from the date of Notice of Award, time being of the essence. The undersigned further proposes to begin work as specified in the contract attached hereto, and to complete the work on or before expiration of the contract time as defined in the Specifications, and maintain at all times a Payment Bond and a Performance Bond, approved by the State Engineer, in an amount equal to one hundred (100) percent of the total bid. These bonds shall serve not only to guarantee the completion of the work on the part of the undersigned, but also to guarantee the excellence of both workmanship and material and the payment of all obligations incurred, until the work is finally accepted and the provisions of the Plans, Standard Specifications and Special Provisions fulfilled.

12-5901 R03/11

Proposal
Sheet 1 of 2

The undersigned hereby agrees to provide an electronic Proposal Guaranty in the amount and character named in the Advertisement for Bids. The Proposal Guaranty is submitted as a guaranty of the good faith of the bidder, and that the bidder will enter into written contract, as provided, to do the work, if successful in securing the award thereof, and it is hereby agreed that if at any time other than as provided in the Proposal there should be failure on the part of the undersigned to execute the Contract and furnish satisfactory Bond as herein provided, the State of Arizona, in either of such events, shall be entitled and is hereby given the right to retain the said Proposal Guaranty as liquidated damages.

If by a Corporation:

(Seal)

Corporate Name: _____

Corporate Mailing Address: _____ Zip Code: _____

Incorporated under the laws of the State of: _____

By (Signature): _____ Date: _____

President: _____

Secretary: _____

Treasurer: _____

If by a Firm or Partnership:

Firm or Partnership Mailing Name: _____

Firm or Partnership Address: _____

By (Signature): _____ Date: _____

Name and Address of Each Member: _____

If by an Individual:

Signature: _____ Date: _____

Mailing Address: _____

ARIZONA DEPARTMENT OF TRANSPORTATION
SURETY (BID) BOND
(Penalty of this bond must not be less than 10% of the bid amount)

KNOW ALL MEN BY THESE PRESENTS, THAT _____

as Principal, hereinafter called the Principal, and _____

_____ a corporation duly organized under the laws of the state of _____ hereinafter called the Surety, holding a certificate of authority to transact surety business in this State issued by the Director of the Department of Insurance, are held and firmly bound unto the Arizona Department of Transportation, as Obligee, hereinafter called the Obligee, in the sum of Ten Percent (10%) of the amount of the bid of Principal, submitted by Principal to the Arizona Department of Transportation for the work described below, for the payment of which sum well and truly to be made, the said Principal and the said Surety bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is herewith submitting its proposal for TRACS/Project No.

089A YV 362 F062401C A89-B(225)T
PRESCOTT-FLAGSTAFF HIGHWAY (SR 89A)
(SR 89A AT PAGE SPRINGS ROAD)

NOW THEREFORE, if the Obligee, acting by and through its Transportation board, shall accept the proposal of the Principal and the Principal shall enter into contract with the Obligee in accordance with the terms of such proposal, and give such bonds and certificates of insurance as may be specified in the contract documents with good and sufficient surety for the faithful performance of such contract and for the prompt payment of labor and material furnished in the prosecution thereof, or in the event of the failure of the Principal to enter into such contract and give such bonds and certificates of insurance, if the Principal shall pay to the Obligee the difference not to exceed the penalty of the bond between the amount specified in the proposal and such larger amount for which the obligee may in good faith contract with another party to perform the work covered by the proposal then this obligation is void. Otherwise it remains in full force and effect.

IN WITNESS WHEREOF, we hereunto set our hands and seals:

Principal

Surety

By

By Attorney-in-Fact

Title

Address Attorney-in-Fact

Subscribed and sworn before me
this _____ day of _____, 20 _____.

My Commission expires: _____

**CERTIFICATION WITH REGARD TO THE PERFORMANCE OF
PREVIOUS CONTRACTS OR SUBCONTRACTS SUBJECT TO THE
EQUAL OPPORTUNITY CLAUSE AND THE FILING OF REQUIRED REPORTS
APRIL, 1969**

The bidder _____, proposed subcontractor _____, hereby certifies that it has _____, has not _____, participated in a previous contract or subcontract subject to the equal opportunity clause, as required by Executive Orders 10925, 11114, or 11246, and that it has _____, has not _____, filed with the Joint Reporting committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements.

(Company)

By: _____

(Title)

Date: _____

Note: The above certification is required by the Equal Employment Opportunity Regulations of the Secretary of Labor (41 CFR 60-1.7b (1),) and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the equal opportunity clause. Contracts and subcontracts which are exempt from the equal opportunity clause are set forth in 41 CFR 60-1.5 (Generally only contracts or subcontracts of \$10,000 or under are exempt.)

Currently, Standard Form 100 (EEO-1) is the only report required by the Executive Orders or their implementing regulations.

Information concerning Standard Form 100 (EEO-1) is available from:

Joint Reporting Committee
P.O. Box 19100
Washington, D.C. 20036-9100

Proposed prime contractors and subcontractors who have participated in a previous contract or subcontract subject to the Executive Orders and have not filed the required reports should note that 41 CFR 60-1.7(b)(1) prevents the award of contracts and subcontracts unless such contractor submits a report covering the delinquent period or such other period specified by the Federal Highway Administration or by the Director, Office of Federal Contract Compliance, U.S. Department of Labor.

089A YV 362 F062401C A89-B(225)T
PRESCOTT-FLAGSTAFF HIGHWAY (SR 89A)
(SR 89A AT PAGE SPRINGS ROAD)

R7/03

**CERTIFICATION WITH RESPECT TO THE
RECEIPT OF ADDENDA**

In the submission of a bid and by the signing of the Proposal, this will certify that the following numbered addenda issued on this project have been brought to my personal attention and furthermore that I understand and agree that those will be made a part of the Contract.

Addendum No. _____, _____, _____, _____, _____

PRINT NAME OF CONTRACTOR

SIGNATURE

TITLE

DATE

089A YV 362 F062401C A89-B(225)T
PRESCOTT-FLAGSTAFF HIGHWAY (SR 89A)
(SR 89A AT PAGE SPRINGS ROAD)

ARIZONA DEPARTMENT OF TRANSPORTATION
PARTICIPATION IN BOYCOTT OF ISRAEL CERTIFICATION FORM

Unless and until the District Court's injunction in Jordahl is stayed or lifted, the Anti-Israel Boycott Provision (A.R.S. § 35-393.01(A)) is unenforceable and the State will take no action to enforce it. This attachment (Participation in Boycott of Israel) is no longer a mandatory part of the offer. Offers will not be evaluated based on whether this certification has been completed.

089A YV 362 F062401C A89-B(225)T
PRESCOTT-FLAGSTAFF HIGHWAY (SR 89A)
(SR 89A AT PAGE SPRINGS ROAD)

This Certification is required in response to legislation enacted to prohibit the State from contracting with companies currently engaged in a boycott of Israel. To ensure compliance with A.R.S. §35-393.01, this form must be completed and returned with the bid. The bidder understands that this response will become public record and may be subject to public inspection.

As defined by A.R.S. §35-393.01:

1. "Boycott" means engaging in a refusal to deal, terminating business activities or performing other actions that are intended to limit commercial relations with Israel or with persons or entities doing business in Israel or in territories controlled by Israel, if those actions are taken either:
 - (a) In compliance with or adherence to calls for a boycott of Israel other than those boycotts to which 50 United States Code section 4607(c) applies.
 - (b) In a manner that discriminates on the basis of nationality, national origin or religion and that is not based on a valid business reason.
2. "Company" means a sole proprietorship, organization, association, corporation, partnership, joint venture, limited partnership, limited liability partnership, Limited Liability Company or other entity or business association, and includes a wholly owned subsidiary, majority-owned subsidiary, parent company or affiliate.
3. "Direct holdings" means all publicly traded securities of a company that are held directly by the state treasurer or a retirement system in an actively managed account or fund in which the retirement system owns all shares or interests.
4. "Indirect holdings" means all securities of a company that are held in an account or fund, including a mutual fund, that is managed by one or more persons who are not employed by the state treasurer or a retirement system, if the state treasurer or retirement system owns shares or interests either:
 - (a) Together with other investors that are not subject to this section.
 - (b) That are held in an index fund.
5. "Public entity" means this State, a political subdivision of this STATE or an agency, board, commission or department of this state or a political subdivision of this state.
6. "Public fund" means the state treasurer or a retirement system.
7. "Restricted companies" means companies that boycott Israel.
8. "Retirement system" means a retirement plan or system that is established by or pursuant to title 38.

All Bidders must select one of the following:

_____The bidder does not participate in, and agrees not to participate in during the term of the contract a boycott of Israel in accordance with A.R.S. §35-393.01.

The bidder **does** participate in a boycott of Israel as defined by A.R.S. §35-393.01.

By submitting this response, the bidder agrees to indemnify and hold the State, its agents and employees, harmless from any claims or causes of action relating to the State's action based upon reliance on the above representations, including the payment of all costs and attorney fees incurred by the State in defending such an action.

_____ Company Name			_____ Signature of Person Authorized to Sign
_____ Address			_____ Printed Name
_____ City	_____ State	_____ Zip	_____ Title

ARIZONA DEPARTMENT OF TRANSPORTATION
Forced Labor of Ethnic Uyghurs Ban Certification Form

Forced Labor of Ethnic Uyghurs Ban

Please note that if any of the following apply to the Contractor, then the bidder shall select the "Exempt Contractor" option below:

- Contractor is a sole proprietorship;
- Contractor has fewer than ten (10) employees; OR
- Contractor is a non-profit organization.

089A YV 362 F062401C A89-B(225)T
PRESCOTT-FLAGSTAFF HIGHWAY (SR 89A)
(SR 89A AT PAGE SPRINGS ROAD)

Pursuant to A.R.S. § 35-394, written certification is required to show that the company entering into a contract with a public entity does not use the forced labor, or use any contractors, subcontractors or suppliers that use the forced labor or any goods or services produced by the forced labor, of ethnic Uyghurs in the People's Republic of China.

Under A.R.S. §35-394:

1. "Company" means an organization, association, corporation, partnership, joint venture, limited partnership, limited liability partnership, limited liability company or other entity or business association, including a wholly owned subsidiary, majority-owned subsidiary, parent company or affiliate, that engages in for-profit activity and that has ten or more full-time employees.
2. "Public entity" means this State, a political subdivision of this State or an agency, board, commission or department of this State or a political subdivision of this State.

In compliance with A.R.S. §§ 35-394 et seq., all bidders must select one of the following:

☐	The bidder <u>does not</u> use, and agrees not to use during the term of the contract, any of the following: • Forced labor of ethnic Uyghurs in the People's Republic of China; • Any goods or services produced by the forced labor of ethnic Uyghurs in the People's Republic of China; or • Any Contractors, Subcontractors, or suppliers that use the forced labor or any goods or services produced by the forced labor of ethnic Uyghurs in the People's Republic of China.
☐	The bidder <u>does</u> participate in use of Forced Uyghurs Labor as described in A.R.S. § 35-394.
☐	Exempt Contractor. Select all statements that applies to this Contractor: ☐ Contractor is a sole proprietorship; ☐ Contractor has fewer than ten (10) employees; and/or ☐ Contractor is a non-profit organization.

Company Name

Signature of Person Authorized to Sign

Address

Printed Name

City State Zip

Title