

# TOTO®

# MW6442044CEFG

## Carolina® II / WASHLET®+ C200 One-Piece Toilet - 1.28 GPF

### FEATURES

- Concealed supply connection for seamless installation
- High-efficiency Tornado Flush® (1.28GPF/4.8LPF)
- Skirted design
- CeFiONtect® glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Decorative one-piece design with high-profile tank
- Elongated front bowl
- 12" Rough-in, less supply
- Optional 10"; 14" Uni-fit rough-in
- Chrome trip lever
- See Spec sheet SW2044T20 for Washlet features

### MODELS

- CST644CEFGT20  
With CeFiONtect glaze

### REQUIRED WASHLET+

- SW2044T20 WASHLET®+ C200  
Fits TOTO WASHLET+ toilet bowl models only

### COLORS/FINISHES

- Standard  
#01 Cotton

### OPTIONAL ROUGH-IN

- 10" rough-in      TSU01W.10R
- 14" rough-in      TSU01W.14R

### PRODUCT SPECIFICATION

The one-piece high-efficiency Tornado Flush toilet shall be 1.28GPF/4.8LPF. Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be **TOTO Model CST644CEFGT20#01**.

See TOTO Specification sheet **SW2044T20** for details on required Washlet.



 **CeFiONtect**      **washlet.+**  
 **Tornado Flush**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)





# MW6442044CEFG

## Carolina® II / WASHLET®+ C200 One-Piece Toilet - 1.28 GPF

### SPECIFICATIONS

- Water Use 1.28 GPF/4.8LPF
- Flush System Tornado Flush®
- Min. Water Pressure 8 psi (flowing)
- Water Surface 6-7/8" x 9-3/4"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CST644CEFGT20 108lbs.  
SW2044T20 16.0lbs.
- Shipping Dimensions CST644CEFGT20  
32" L x 20"W  
x 17-3/4" H<sup>1</sup> x 28-3/4" H<sup>2</sup>  
SW2044T20  
23 1/2" X 19" X 9"
- See Spec sheet **SW2044T20** for Washlet details

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

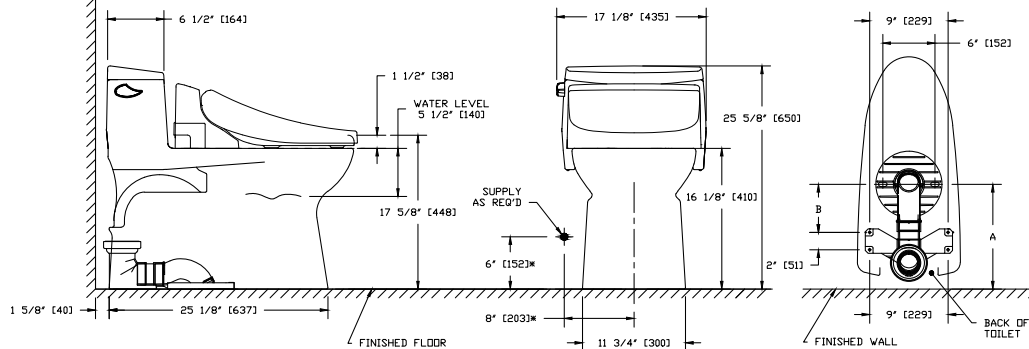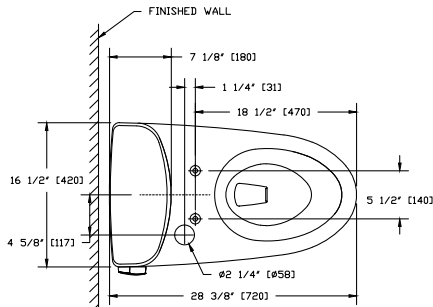


\*SUGGESTED DIMENSIONS


### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

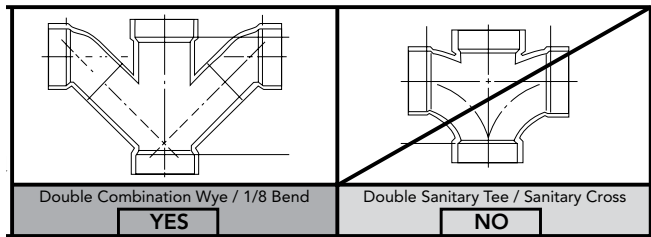

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

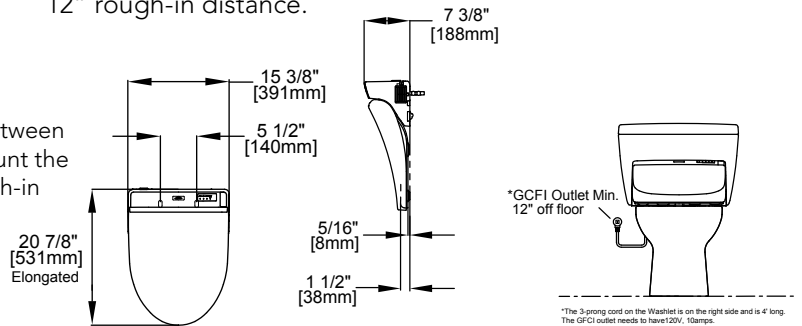

\*The 3-prong cord on the Washlet is on the right side and is 4' long. The GFCI outlet needs to have 120V, 10amps.

UNIFIT TYPE	A	B
12" RDUGH	12" [305]	5 1/2" [140]
10" RDUGH	10" [254]	3 1/2" [89]
14" RDUGH	14" [356]	7 1/2" [191]

RD-XXXX, MW6442044CEFG, V.01

**TOTO®**

These dimensions and specifications are subject to change without notice