

# TOTO®

# CST494CEMF(R)(G)

## Connelly™ Close Coupled Toilet, 1.28GPF & 0.9GPF

### FEATURES

- 3D Tornado™ flushing system, high efficiency (1.28GPF/4.8LPF & 0.9GPF/3.4LPF)
- Dual flush function
- Elongated bowl
- Universal Height
- Close coupled bowl and tank set, less toilet seat
- CeFiONtect™ ceramic glaze minimizes debris, mold and bacteria from sticking to porous, ceramic surfaces
- Chrome trip-lever
- 12" Rough-in

### MODELS

- CST494CEMFG  
With CeFiONtect ceramic glaze (#01, #03, #11, #12)
- CST494CEMFRG  
Same as above with right-hand trip lever (#01)
- CST494CEMF  
Without CeFiONtect ceramic glaze (#51)

### COMPONENTS

- CT494CEFG - Elongated Front Bowl CeFiONtect
- CT494CEF - Elongated Front Bowl Less CeFiONtect
- ST494M - Tank and cover only
- ST494MR - Same as above with right-hand trip lever
- SS224 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)
- SS304 SoftClose® maple seat (sold separately)

### COLORS/FINISHES

- #01 Cotton                      #03 Bone
- #11 Colonial White      #12 Sedona Beige
- #51 Ebony (not available in CeFiONtect)

### PRODUCT SPECIFICATION

The two-piece, universal height, high efficiency 3D Tornado flushing system toilet shall be 1.28GPF/0.9GPF. Toilet shall be ADA height compliant and universal height. Toilet shall have high-profile tank, elongated front bowl and chrome trip-lever. Toilet shall be **TOTO Model CST494CEMF\_\_**.



 **CeFiONtect**

 **3D Tornado**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



# CST494CEMF(R)(G)


## Connelly™ Close Coupled Toilet, 1.28GPF & 0.9GPF

### SPECIFICATIONS


- Water Use 1.28 GPF & 0.9GPF (4.8LPF & 3.4LPF)
- Flush System 3D Tornado™
- Min. Water Pressure 8 psi (flowing)
- Water Surface 5-1/2" x 4-3/16"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C494CEF(G) - 70lbs  
ST494M(R) - 31lbs
- Shipping Dimensions C494CEF(G)  
29" L x 18" W x 15-3/4" H  
  
ST494M(R)  
17-1/4" L x 8-1/2" W x 16-1/4" H

### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

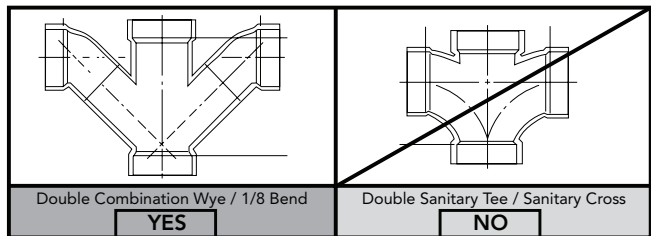

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

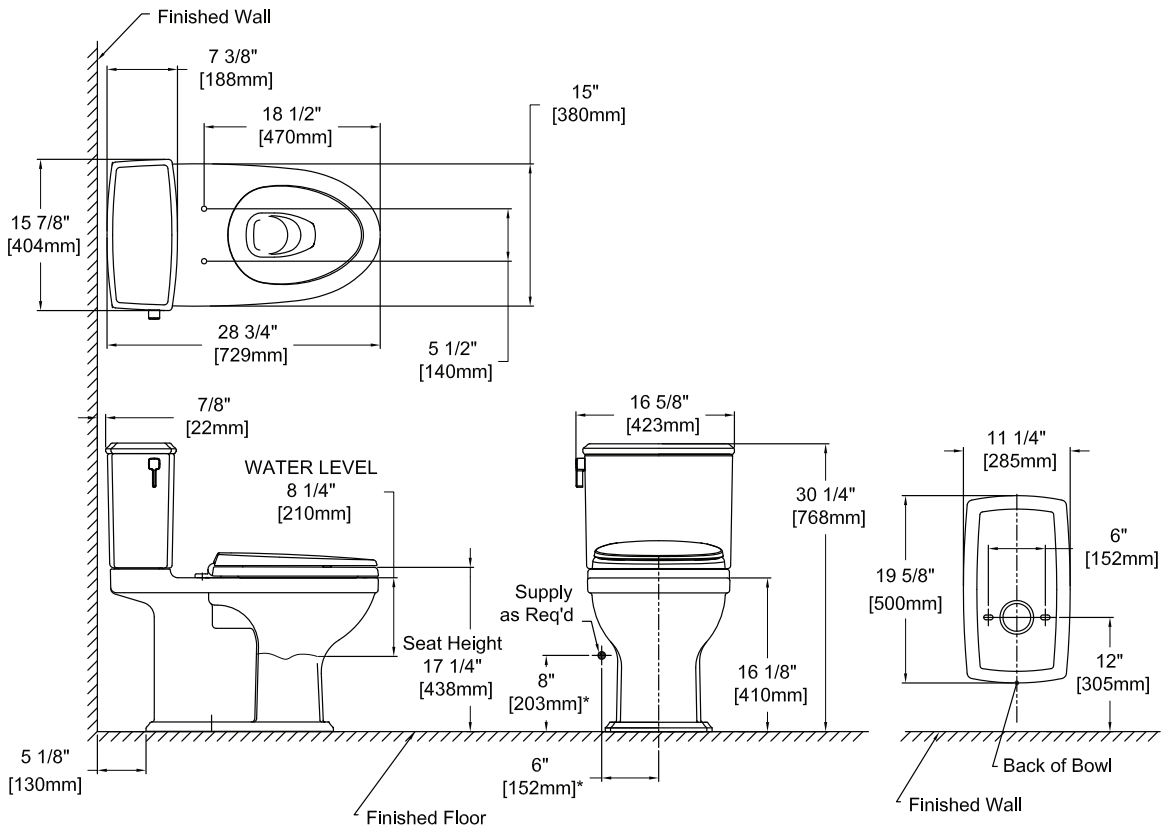

\*Suggested Dimensions

**TOTO**

These dimensions and specifications are subject to change without notice