

# Dynamic Resource Management in Core Networks

Jaafar M. H. Elmirghani, University of Leeds


[j.m.h.elmirghani@leeds.ac.uk](mailto:j.m.h.elmirghani@leeds.ac.uk)




## Overview

- Dynamic adaptation to available renewable energy
- Optimum placement of data centres and content
- Dynamic content caching
- Dynamic peer-to-peer content distribution
- Future directions




# End-to-end network

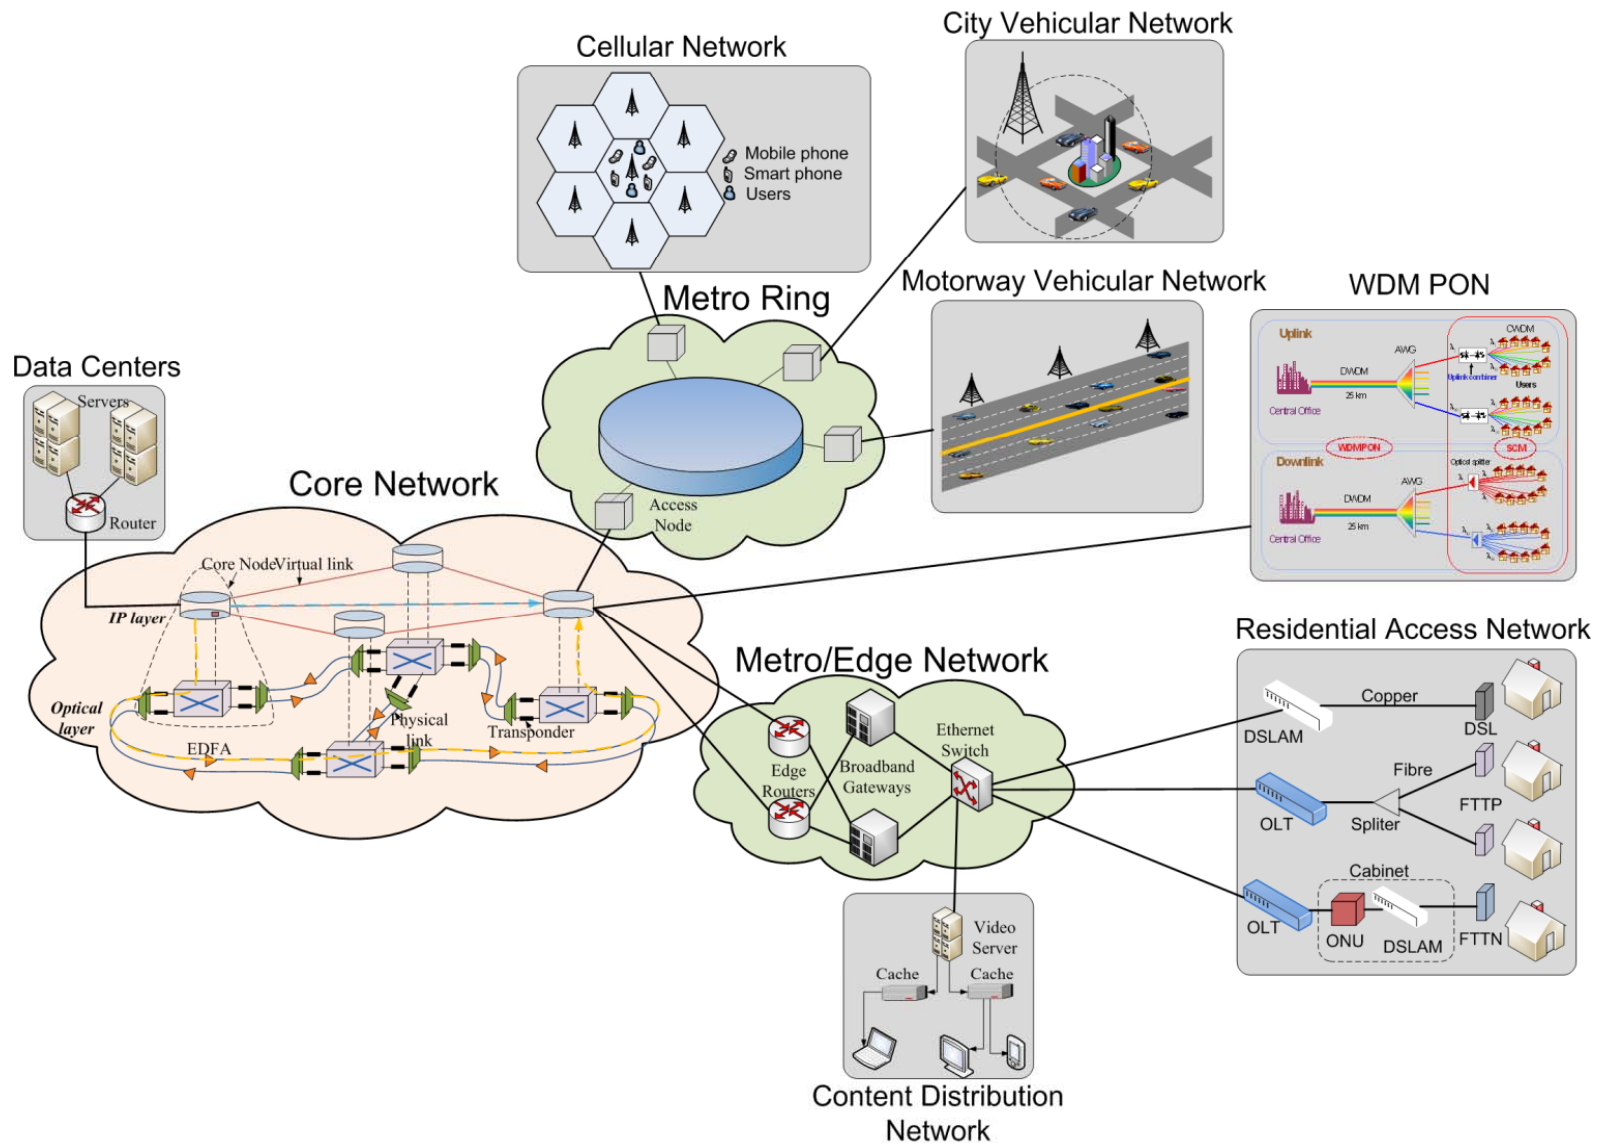

## “Hybrid-power” IP over WDM network architecture

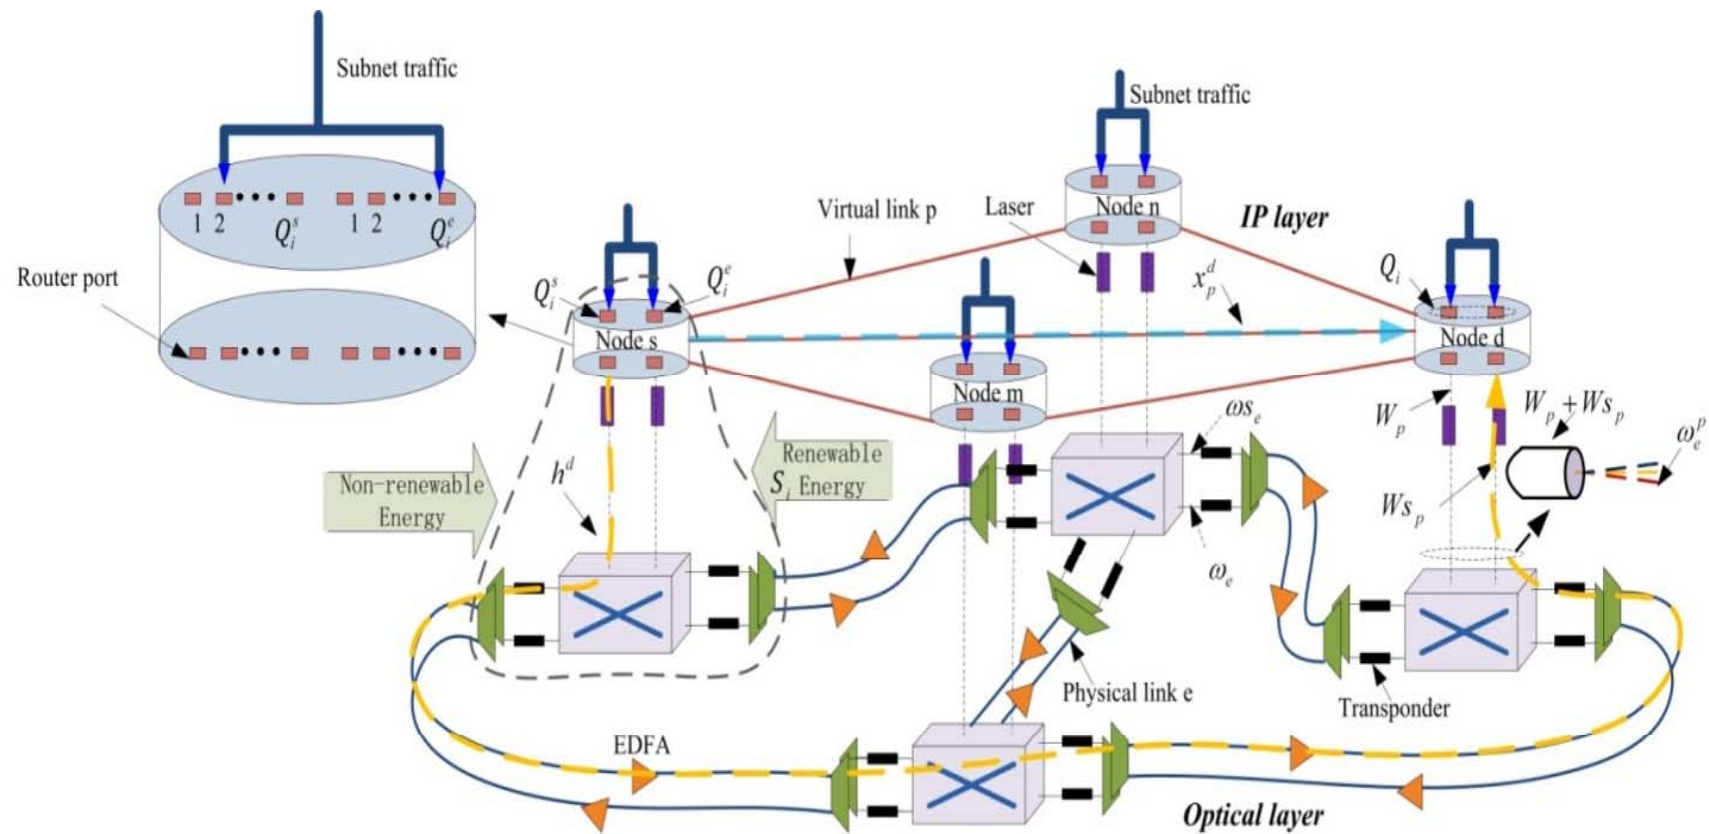


# The Scenario

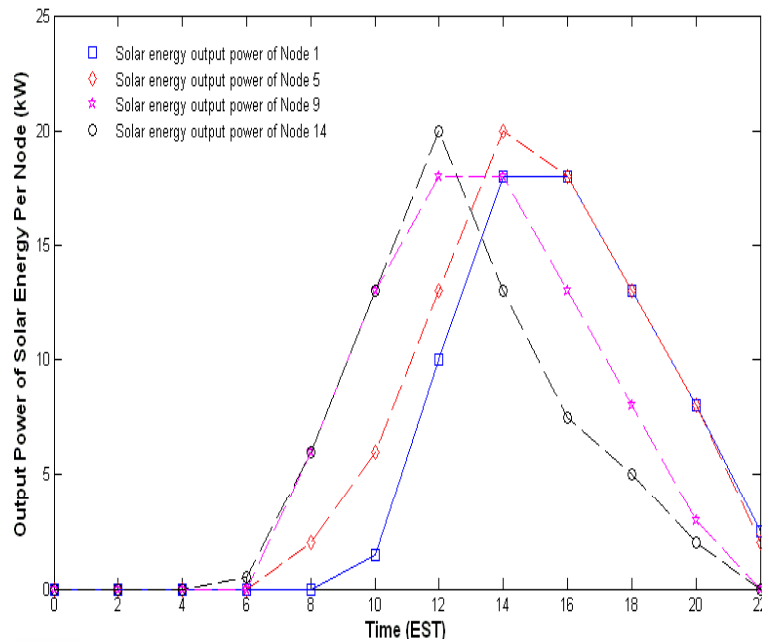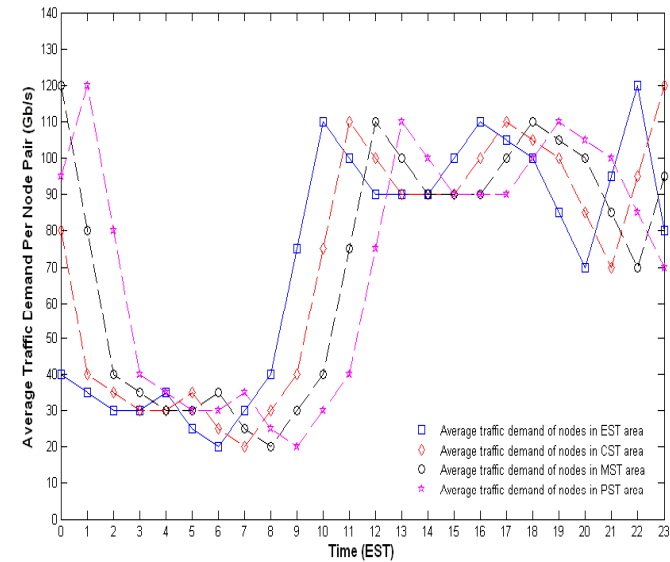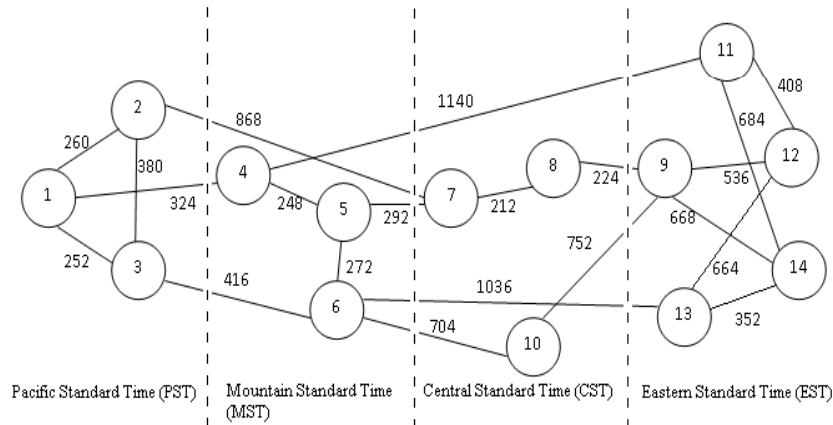

Distance between two neighbouring EDFAs	80 (km)
Capacity of each wavelength ( $B$ )	40 (Gb/s)
Power consumption of a router port ( $PR$ )	1000 (W)
Power consumption of a transponder ( $PT$ )	73 (W)
Power consumption of an EDFA ( $PE$ )	8 (W)
Power consumption of an optical switch ( $PO$ )	85 (W)
Power consumption of a multiplexer/demultiplexer ( $PMD$ )	16 (W)

## Energy saving under ALR with the REO-hop heuristic

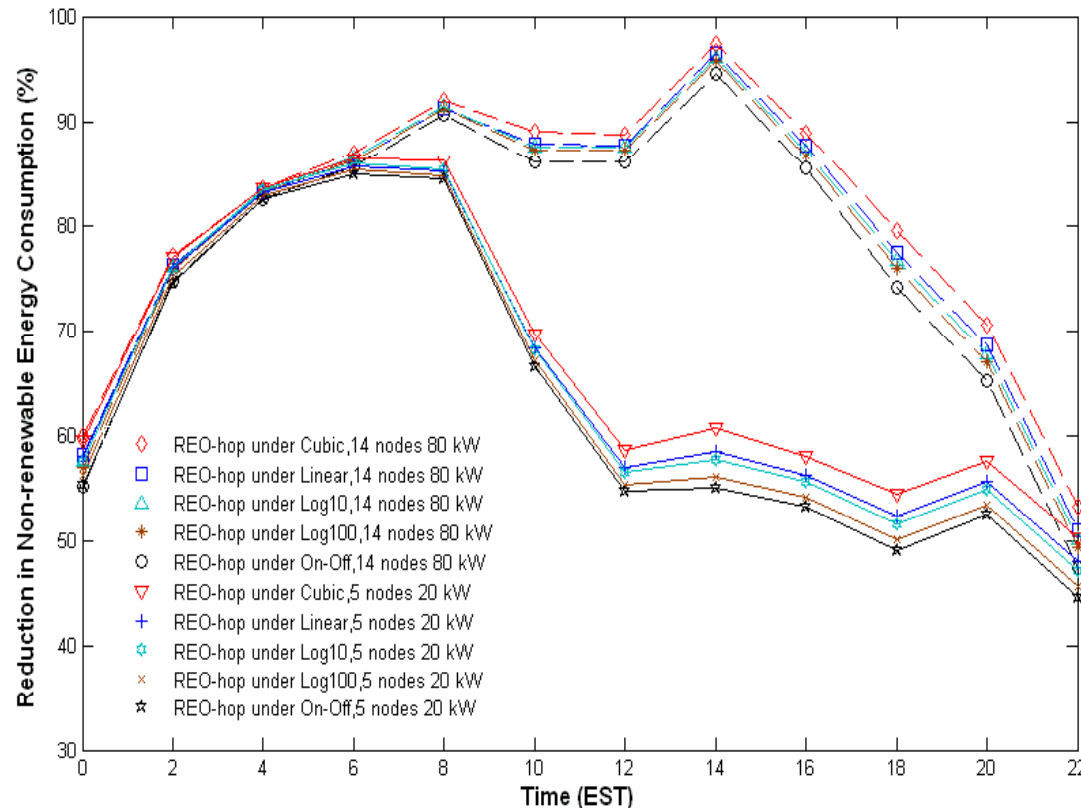


- With only 20 kW renewable in 5 nodes the energy saving compared to the non-bypass case without solar energy is approximately 85% (maximum) and 65% (average).
- Note that the 85% and 65% savings are almost real energy savings since the renewable energy is low here and has limited effect.
- When all nodes use 80 kW renewable energy, the energy saving is approximately 97% (maximum) and 78% (average).

# Network design with data centres, energy-efficiency

- Three problems are investigated:
  - **Firstly**, the optimization, Linear Programming (LP), of the data centres locations to minimize the Power consumption.
    - Investigate the IP over WDM **routing approach** (bypass and non-bypass), the **regularity of the network topology** and the **number of data centres** in the network.
  - **Secondly**, we investigate the energy savings introduced by implementing a **data replication scheme** in the IP over WDM network with data centres, where frequently accessed data objects are replicated over multiple data centres according to their **popularity**.
  - **Thirdly**, we investigate introducing renewable energy sources (wind and solar energy) to the IP over WDM network with data centres.
    - We evaluate **the merits of transporting bits** to where renewable energy is (wind farms), **instead of transporting renewable energy** to where data centres are.
    - We consider the impact of the electrical power transmission losses, network topology, routing, traffic.

## Data centres in an IP over WDM network

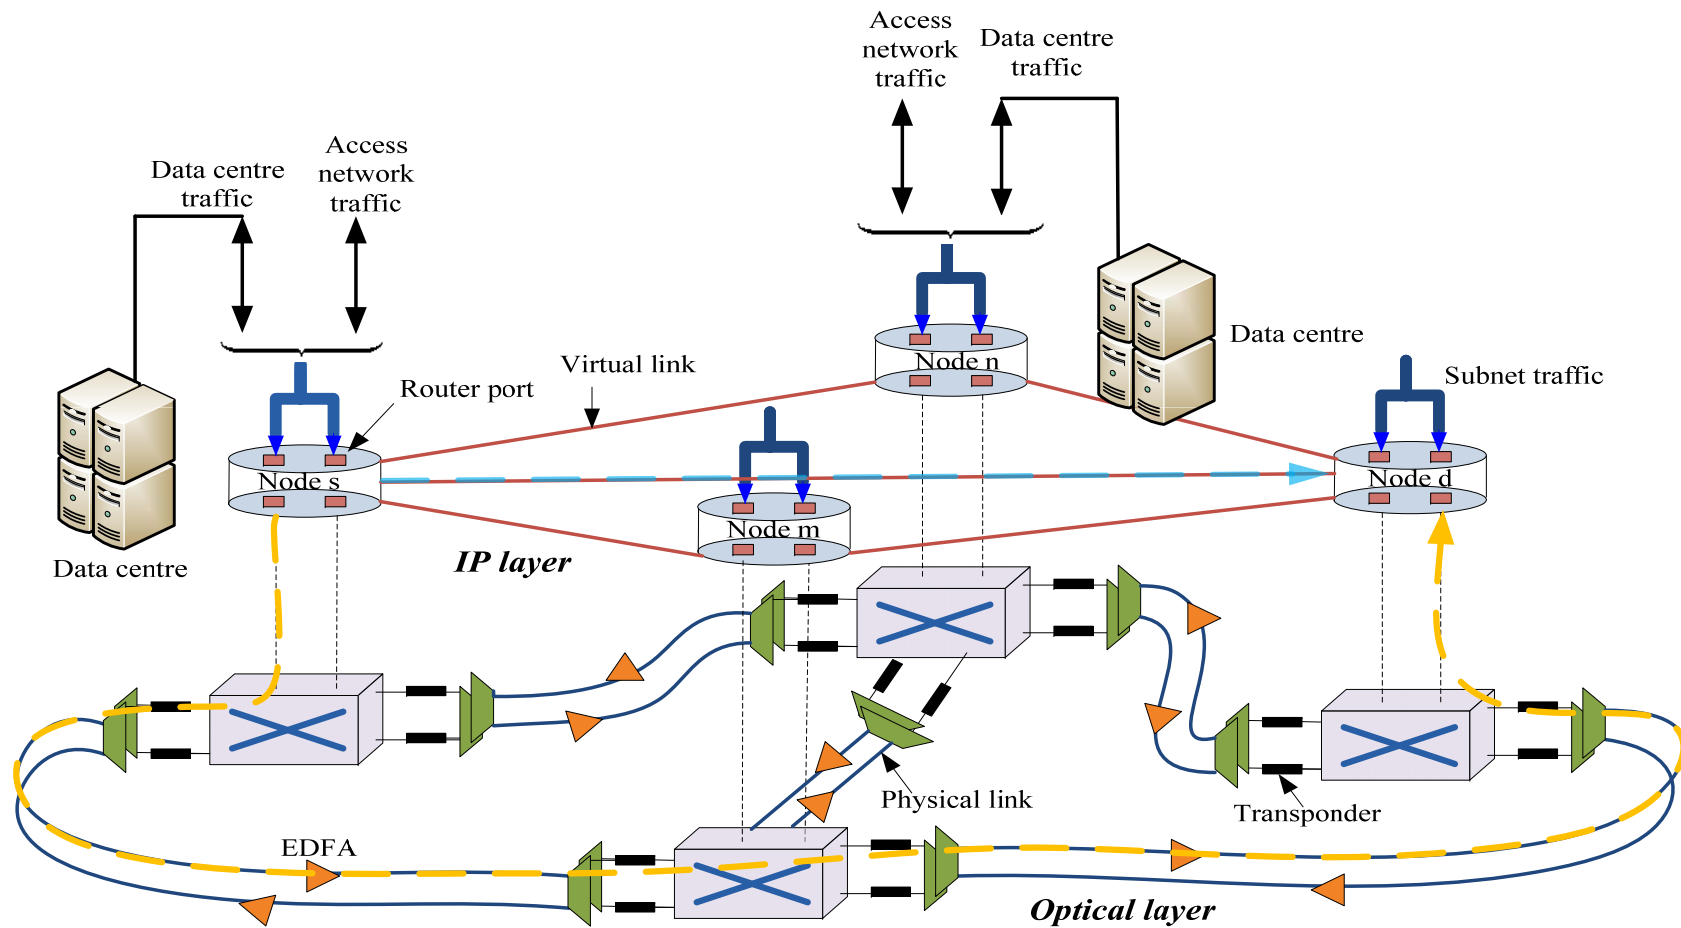




## Summary of power savings as a result of data centre location optimisation

Topology	Data centre traffic only	Data centre traffic and regular traffic
Irregular topology under the non-bypass heuristic	37%	11%
Irregular topology under the multi-hop bypass heuristic	17%	6.3%
NSFNET topology with a single data centre under the non-bypass heuristic	26.6%	12.7%
NSFNET topology with a single data centre under the multi-hop bypass heuristic	8.6%	4.6%
NSFNET topology with 5 data centres under the non-bypass heuristic	11.4%	4.4%
NSFNET topology with 5 data centres under the multi-hop bypass heuristic	6.5%	1.7%

## Data replication in IP over WDM networks with data centres

- Large operators have multiple data centres.
- Content (that has different popularity) can be replicated to reduce delay and power consumption.
- A MILP model is developed to optimize the selection of data centres to replicate data objects under the lightpath bypass approach.
- A Zipf distribution is assumed for content popularity.
- With 5 data objects, the popularities are: 43.7%, 21.8%, 14.5%, 10.9% and 9%.

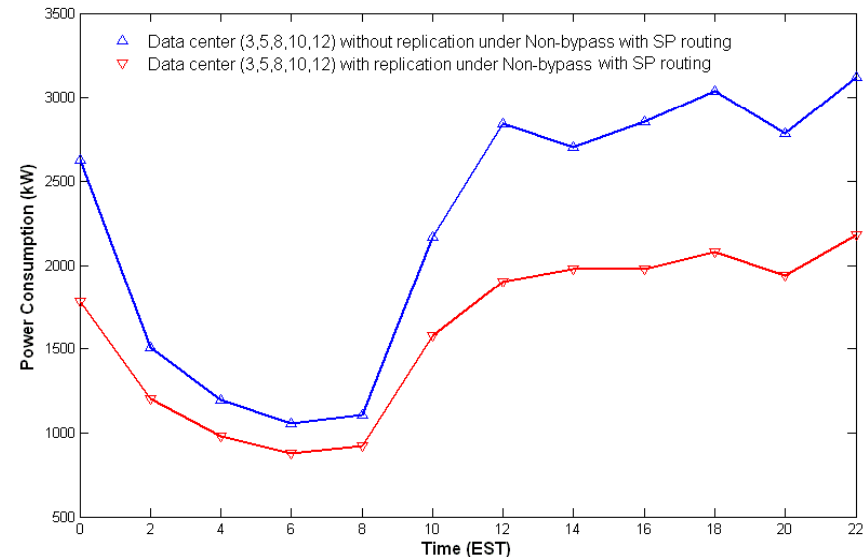

DC & regular traffic  
Non-bypass:


LP optimal DC nodes =  
(5,6,8,10,13)

LP determines where each  
object is replicated

Power saving=28%

## Renewable energy in IP over WDM networks with data centres

- We compare moving bits to where renewable energy is (wind farms) to transporting renewable energy to data centres.
- We have selected only 3 wind farms based on their location and maximum output power to power the data centres in the network: 1) WF1: Cedar Creek Wind Farm, 2) WF2: Capricorn Ridge Wind Farm, 3) WF3: Twin Groves Wind Farm in blue. The maximum output power of the three wind farms is 300MW, 700 MW and 400 MW, respectively.
- We assume the transmission power loss is 15% per 1000km [25] and the percentage of the power of wind farms allocated to data centres is assumed to be 0.3%.

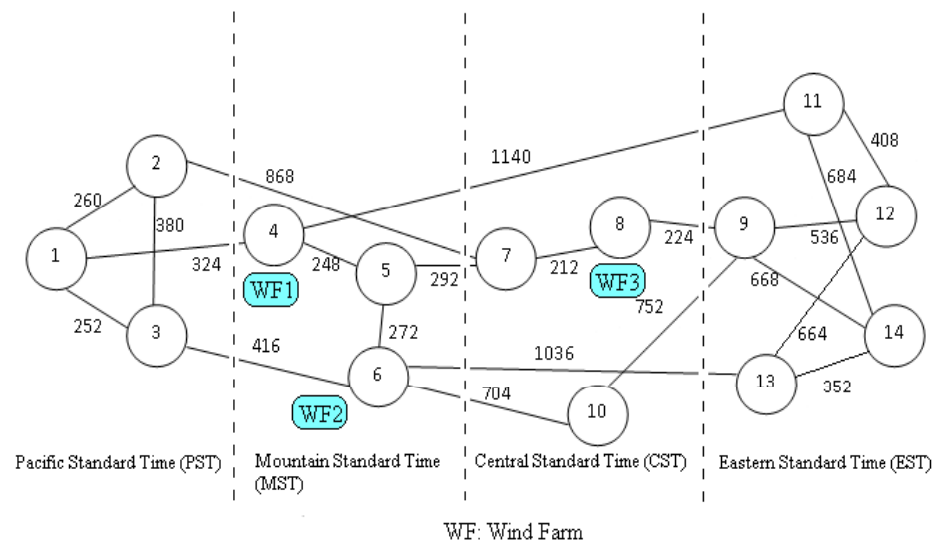

## Data centre, computing, cooling and lighting power usage


- The cooling & lighting power consumption of a typical data centre is 150-200W/ft<sup>2</sup>. Assuming a 3500ft<sup>2</sup> data centre, the total power consumed in a typical data centre for cooling is 700kW and the computing power consumption in a data centre is assumed to be 300kW which is typical for this data centre size.
- The power allocated by a wind farm to a data centre is known and is assumed here to be 1.4MW. This corresponds to a power usage efficiency (PUE) of 2 which is typical for a data centre.
- The renewable energy available to a data centre is a function of the transmission losses and these are location dependent. Furthermore the network topology, traffic, components' power consumption also play an important role in determining the optimum data centre location.
- Therefore the LP model here takes into account the previous trade-offs as well as the trade-offs introduced by the losses associated with the transmission of renewable energy to the data centre locations.

## Renewable energy in the IP over WDM network with data centres

### *LP, Simulation and Results*


- We run the LP model with five data centres ( $N_{dc}=5$ ) under the previous assumptions.
- The optimal locations of data centres obtained from the LP model are as follows (4, 5, 6, 7, 8) where data centres 4 and 5 are powered by WF1, data centre 6 and 7 are powered by WF2, and data centre 8 is powered by WF3.
- The LP model results are such that all the data centres are located in the centre of the network.
- It can be observed that the optimum data centres locations are next to or near wind farms.

## Energy efficient caching for IPTV on-demand services


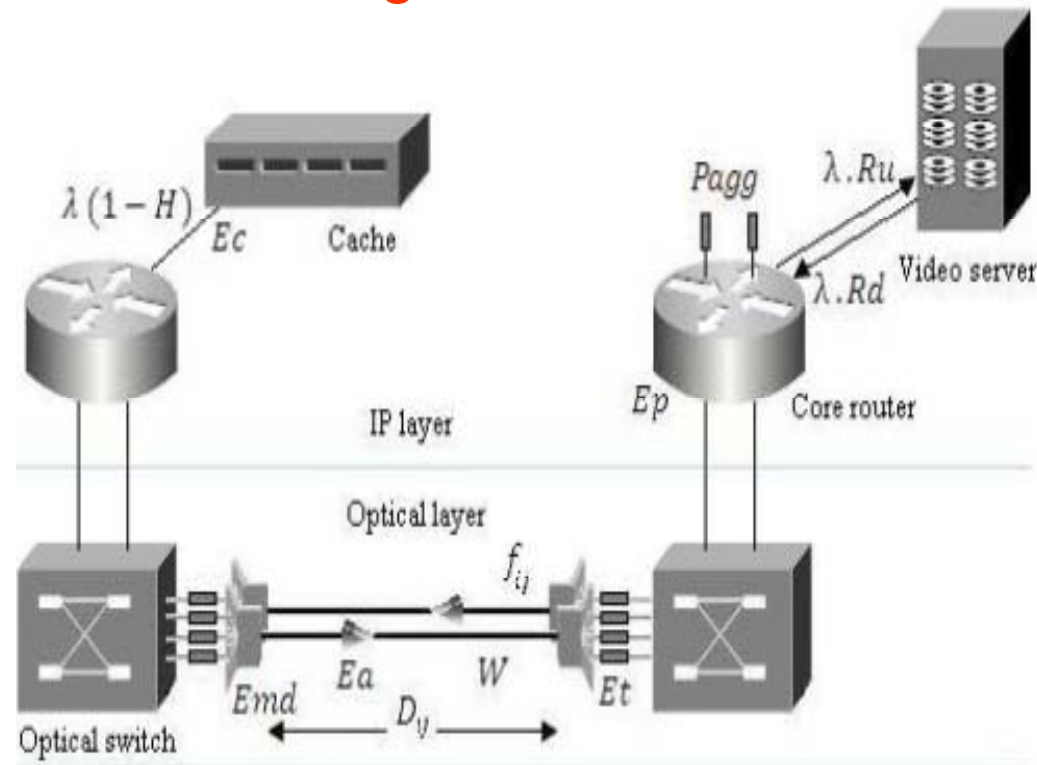


- By 2014 over **91%** of the global **IP traffic** is projected to be a form of **video** (IPTV, VoD, P2P), with an annual growth in VoD traffic of 33%.
- In proxy-based architectures, proxies (or caches) are located closer to clients to cache some of the server's content.
- **Our goal is to minimize the power consumption of the network by storing the optimum number of the most popular content at the nodes' caches.**


# Cache size optimization

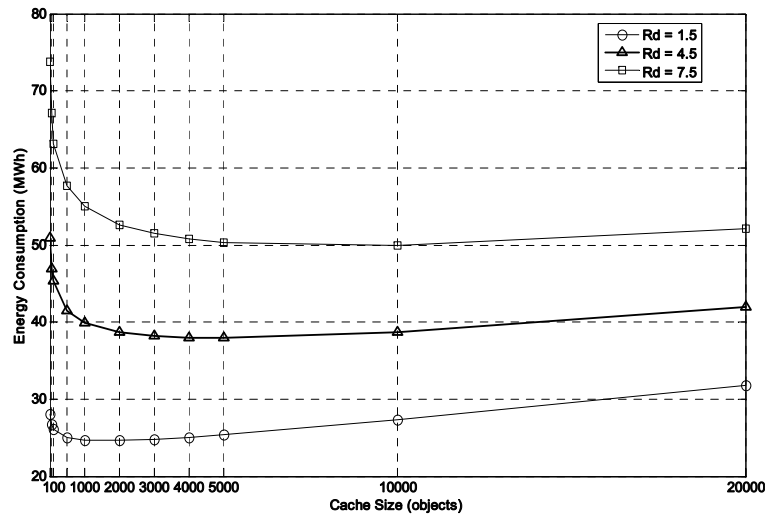

Variable  
size cache  
max  
network  
power  
saving 42%

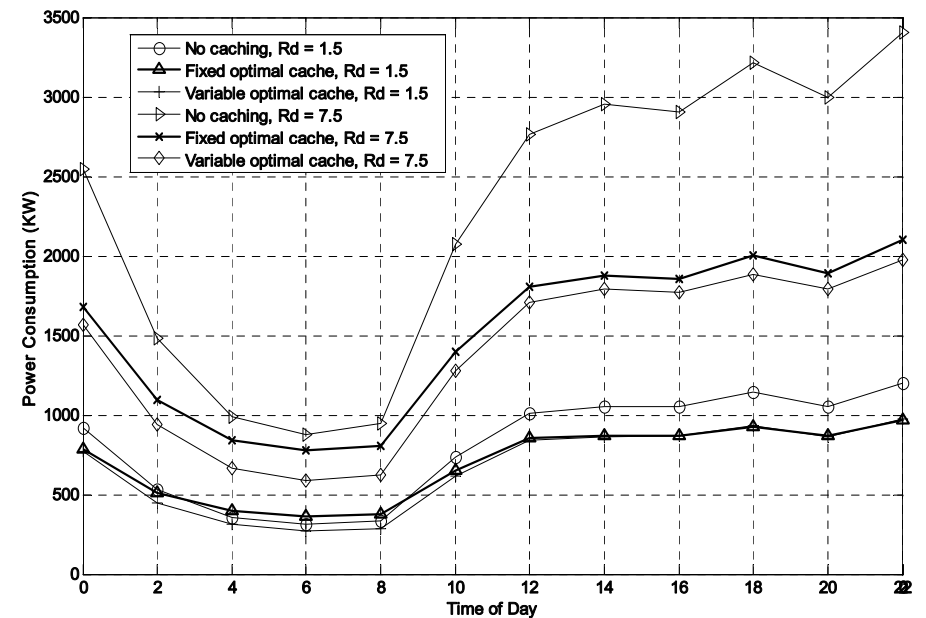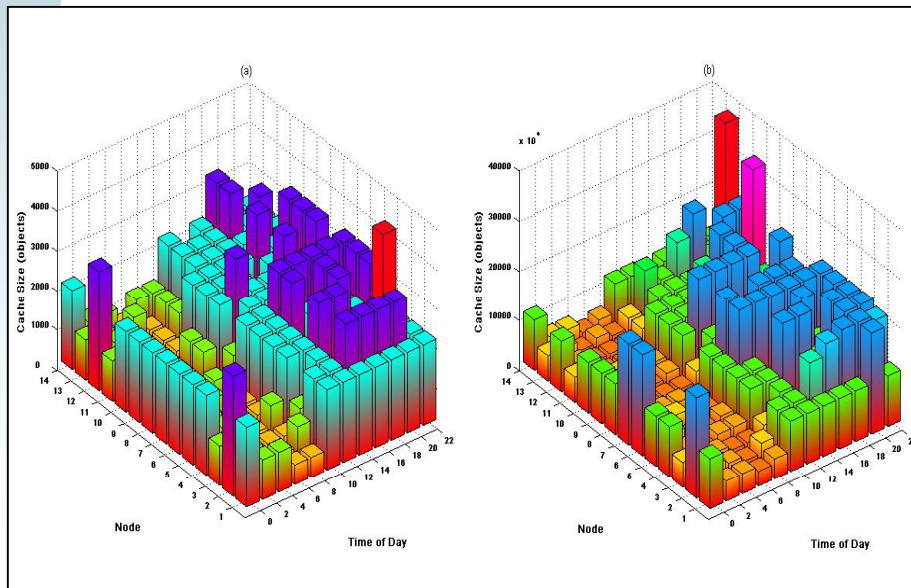

# Energy Efficient BitTorrent over IP over WDM Networks

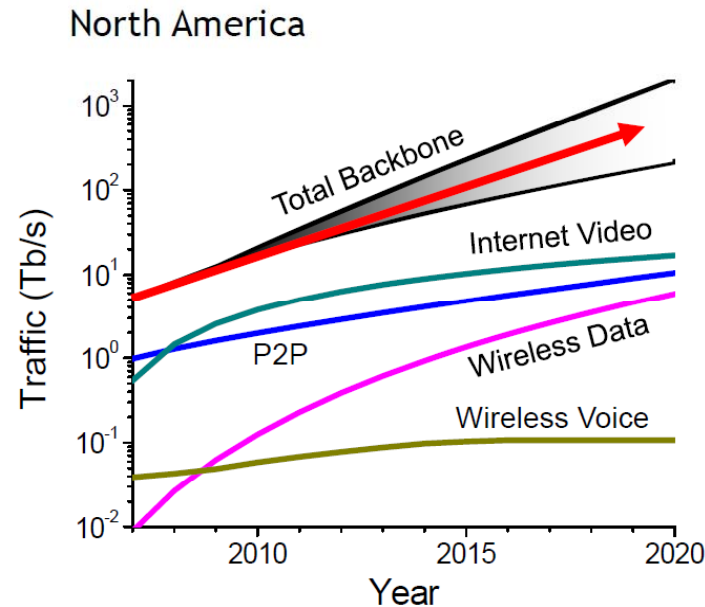

Doubling every 2 years

- 40% per year
- 30x in 10 years
- 1000x in 20 years

Mix of services is important from energy perspective:

- Mobile less efficient than fiber optics

Data from: RHK, McKinsey-JPMorgan, AT&T, MINTS, Arbor, ALU, and  
Bell Labs Analysis: Linear regression on  $\log(\text{traffic growth rate})$  versus  $\log(\text{time})$  with Bayesian learning to compute uncertainty

- The two content distribution schemes, Client/Server (C/S) and Peer-to-Peer (P2P), account for a high percentage of the Internet traffic.
- We investigate the energy consumption of BitTorrent in IP over WDM networks.
- We show, by mathematical modelling (MILP) and simulation, that peers' co-location awareness, known as locality, can help reduce BitTorrent's cross traffic and consequently reduces the power consumption of BitTorrent on the network side.




## Energy Efficient BitTorrent over IP over WDM Networks

- The file is divided into small pieces.
- A **tracker** monitors the group of users currently downloading.
- Downloader groups are referred to as **swarms** and their members as **peers**. Peers are divided into **seeders** and **leechers**.
- As a leecher finishes downloading a piece, it selects a fixed number (typically 4) of interested leechers to upload the piece to, ie **unchoke**, (**The choke algorithm**).
- **Tit-for-Tat (TFT)** ensures fairness by not allowing peers to download more than they upload.
- We consider **160,000 groups** of downloaders distributed randomly over the **NSFNET** network nodes.
- Each group consists of **100 members**.
- File size of **3GB**.
- **Homogeneous** system where all the peers have the same upload capacity of **1Mbps**.

## Energy Efficient BitTorrent over IP over WDM Networks


- **Optimal Local Rarest First** pieces dissemination where Leechers select the least replicated piece in the network to download first.
- BitTorrent traffic is 50% of total traffic.
- **Flash crowd** where the majority of leechers arrive soon after a popular content is shared.
- We compare BitTorrent to a C/S model with 5 data centers optimally located at nodes 3, 5, 8, 10 and 12 in NSFNET.
- The upload capacity and download demands are the same for BitTorrent and C/S scenarios (16Tbps).

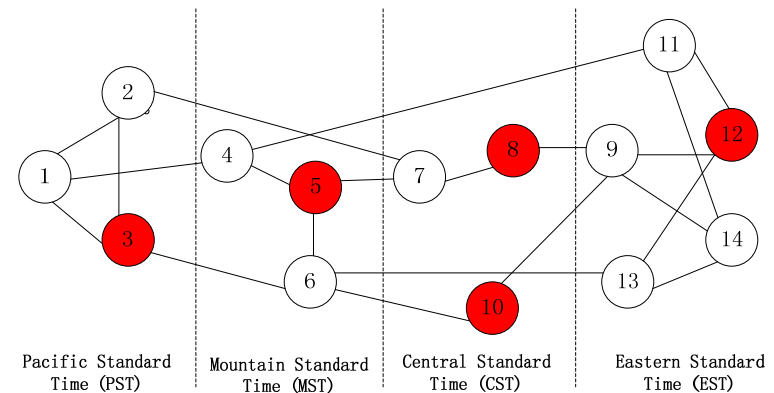

NSFNET Network


## Peer Selection

(100 Peer: 30 Seeders and 70 Leechers in Swarm 1)

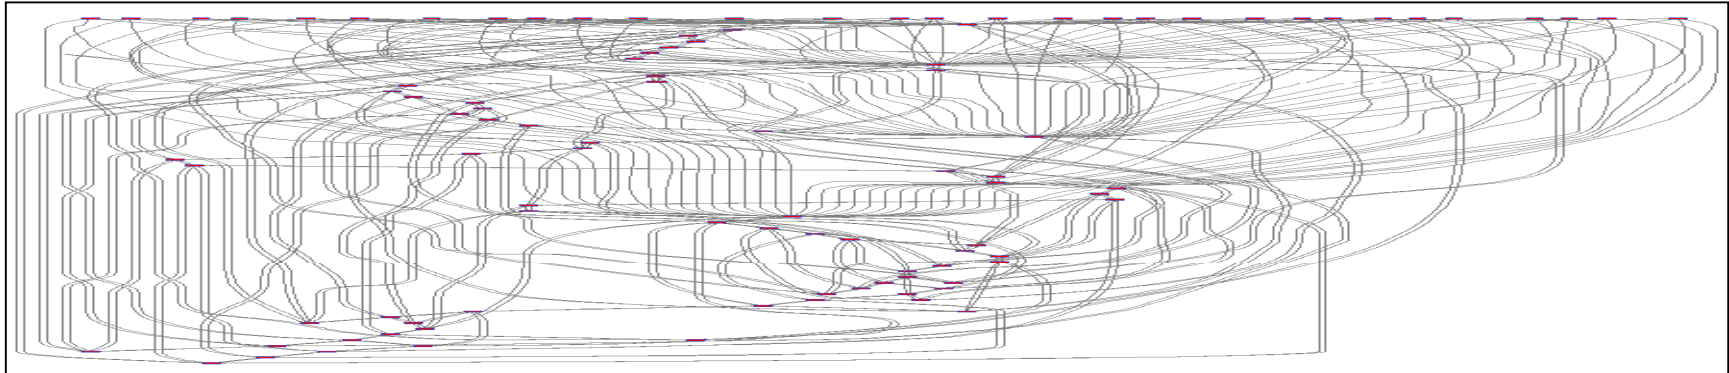


Original BitTorrent (Random Selection)

$\beta=0$




Energy Efficient BitTorrent (Optimized Selection)

$\beta=1$

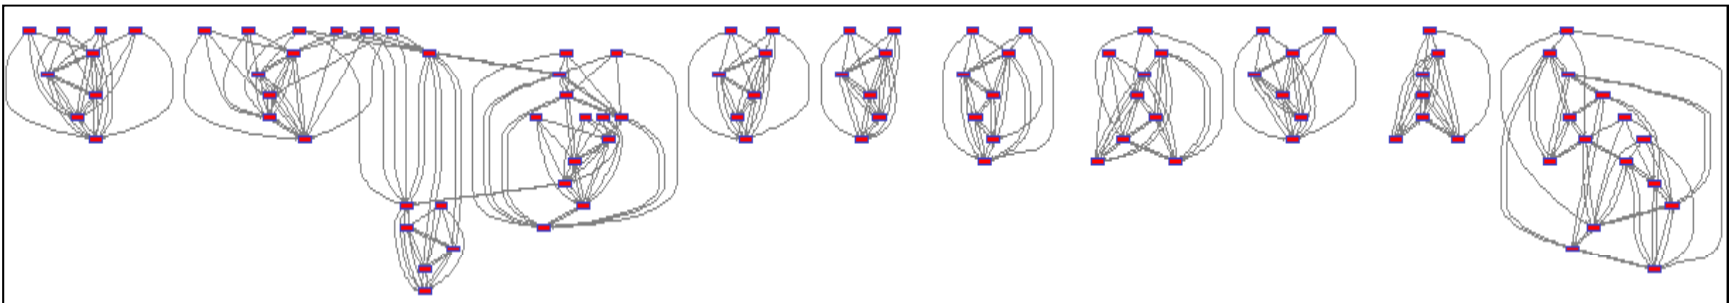


## Average Download Rate

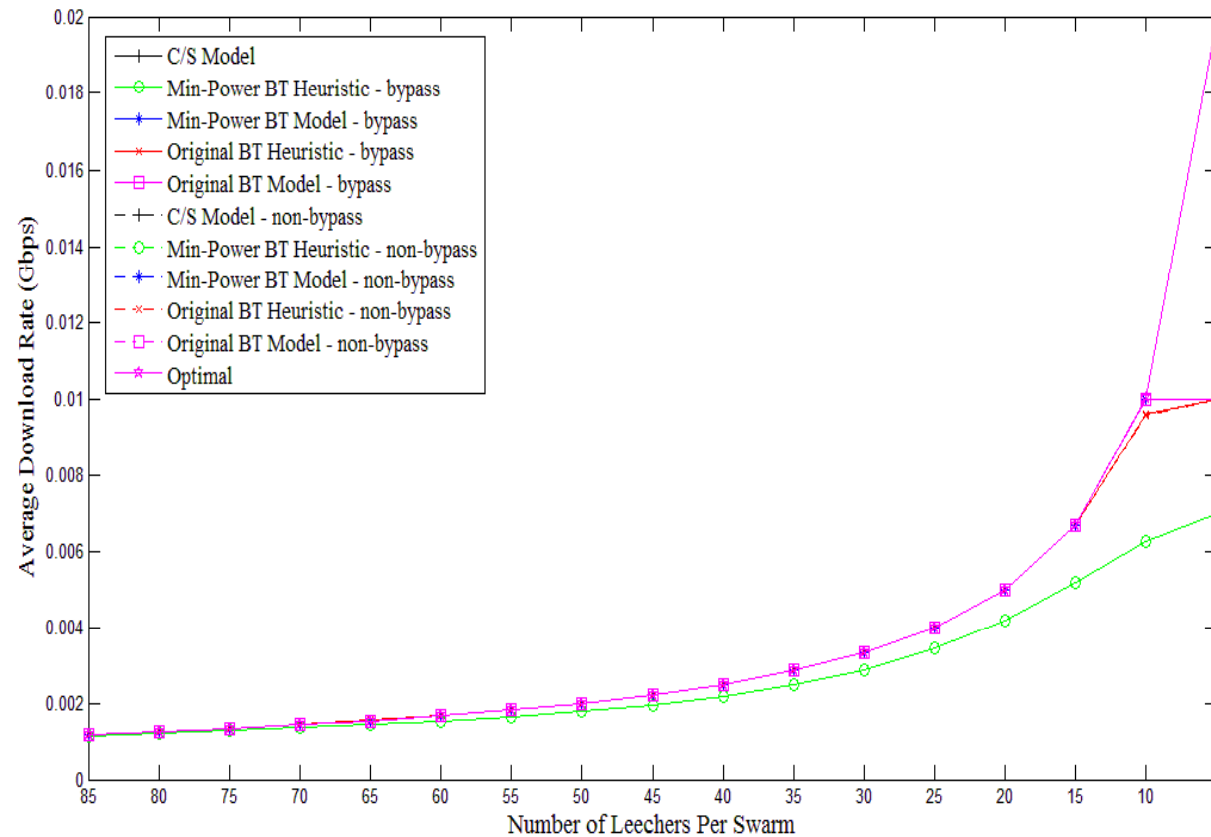

- All models reach optimal performance
- Energy-efficient heuristic reduce performance by 13%

# Power Consumption

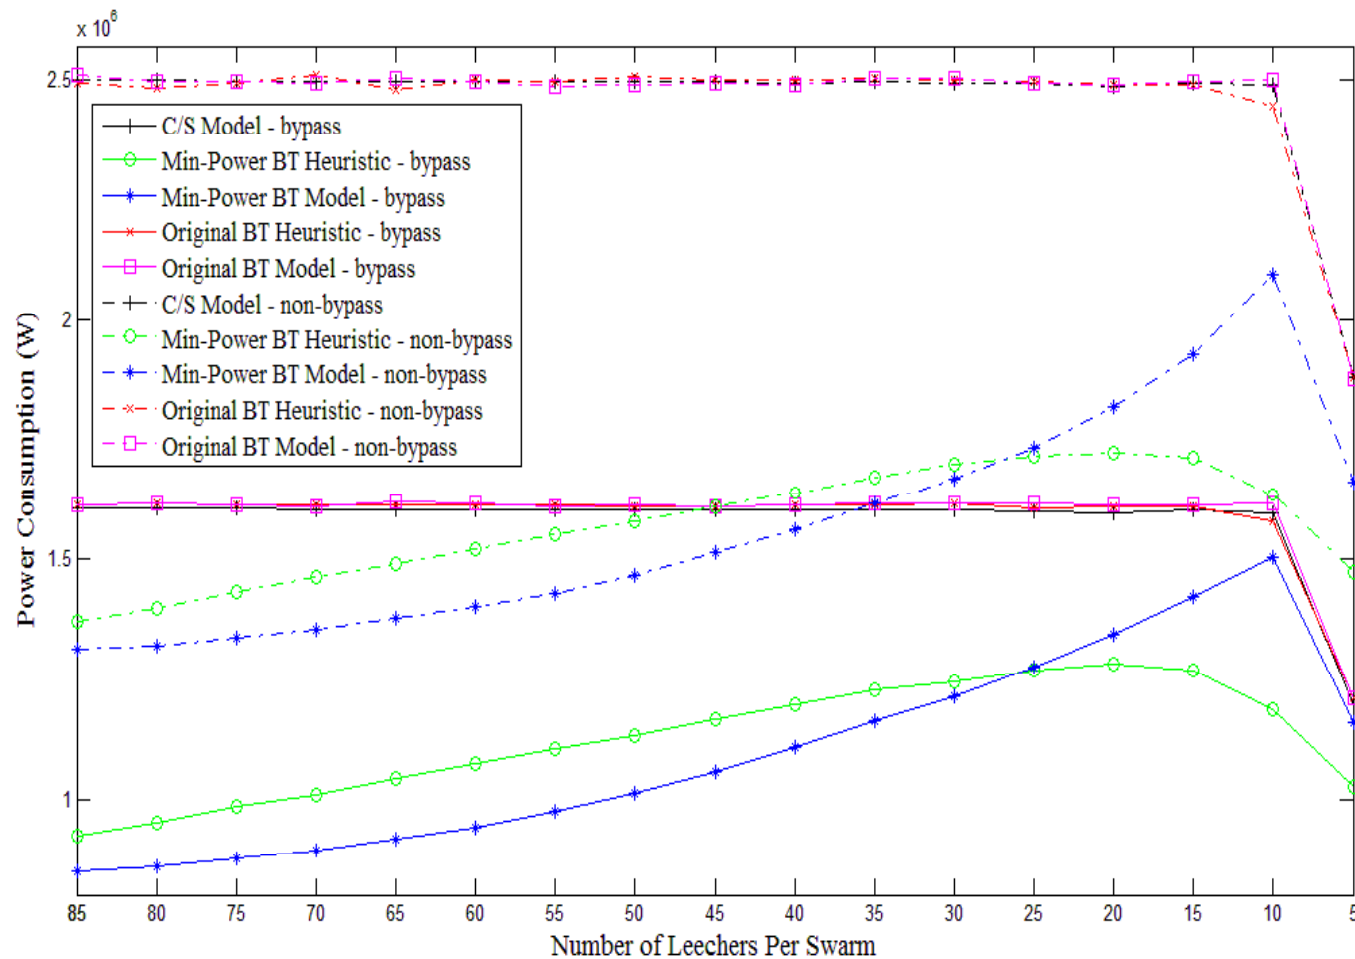


Non-bypass:

Model Power Saving=36%  
Heuristic Power Saving =36%

Bypass:

Model Power Saving=30%  
Heuristic Power Saving =28%

# Energy Consumption

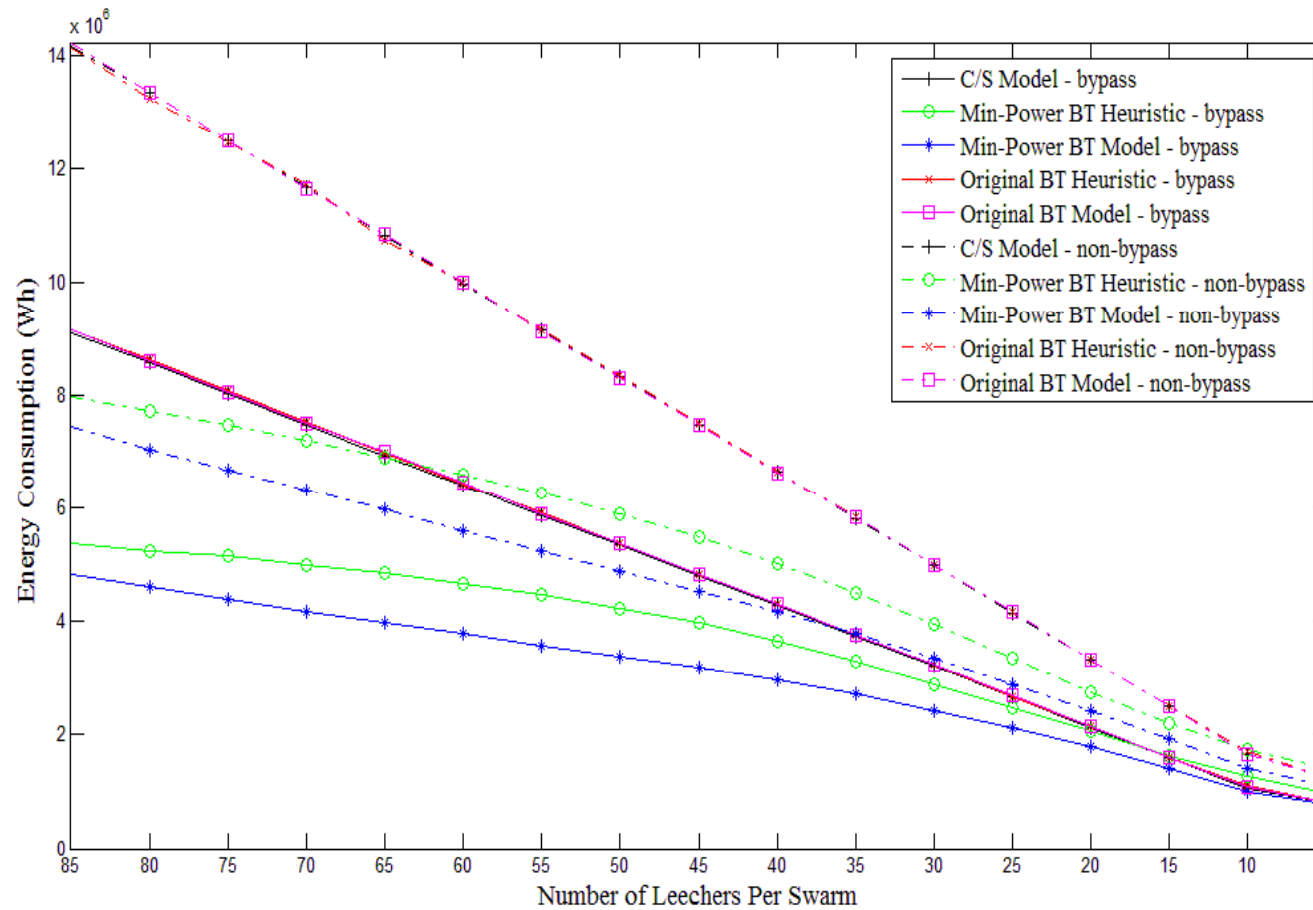

Non-bypass:

MILP average Energy Saving=36%  
Heuristic average Energy Saving =25%

Bypass:

MILP average Energy Saving=30%  
Heuristic average Energy Saving =15%

## Future directions

- Dynamic load migration to match energy supply and demand; availability of renewable energy
- Traffic shaping to enhance dynamic resource adaptation and energy saving
- Hybrid P2P and C/S content distribution networks
- Cross layer resource adaptation (physical layer impairments, adaptive and mixed line rates; application awareness of physical and network layers)
- Dynamic resource adaptation in clean slate architectures (eg. time switched, subcarrier switched, time-subcarrier switching)