



Revision: 3

Date: June 2020

Supersedes all previous issues

# Leda Invisi II

4.5/3 litre Dual Flush Toilet Suite with  
Leda Wall Faced Box Rim Vitreous China Pan  
and Invisi II Cistern for Inwall, Under Counter,  
Induct or Inceiling applications






The 4.5/3 dual flush **Leda Invisi II** matched suite features smooth sides and concealed plumbing fittings, which allow for varying setouts. The pan connection system includes the patented Caroma Uni-Orbital® connector and adjustable flush pipe for increased installation flexibility. The Caroma Uni-Orbital® connector extends to any position in a 25mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 170mm with a recommended setout of 90mm. Suitable for domestic and commercial applications. Concealed cistern and plumbing fittings provide space saving, ease of cleaning and performance matched components to maximise flushing efficiency. The adjustable flush pipe is a new feature for the Invisi II system. If the pan inlet hole is higher than the flush pipe due to floor tiling height variations, the flush pipe can be raised by up to 25mm.

- Pan:** Leda wall faced back inlet 4.5 litre full flush partial box rim pan.
- Traps:** Universal trap for S or P-trap installations.
- Cisterns and Flushvalves:** **Invisi II** cistern – suitable for inwall, under counter, induct and inceiling applications. For push button and access plate (supplied separately) options see chapter 6.15.1 CISTERNS of the Caroma Technical Manual.
- Fixing:** The pan can be fixed to the floor by either bedding into mortar or using the D82 Concealed Fixing Bracket. The cistern is simply mounted into position by clipping onto the two quick clip mounting brackets which are secured with screws to the studwork or induct brickwork. Cistern brackets and flush pipe supplied.
- Seats:** Includes **Pedigree II** seat or **Pedigree II** soft close seat. See chapter 5.01 SEATS of the Caroma Technical Manual for further details.
- Colours:** White only.
- Installation:** The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.
- Dimensions:** All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

### Leda Invisi II Wall Faced Suite Inwall/Under Counter Installations





### Leda Invisi II 4.5/3 litre Toilet Suite with Back Inlet Pan, Internal Overflow Cistern and Seat:

	Code No.
Inwall/Under Counter/ Induct/Inceiling with Pedigree II seat	712100W
Inwall/Under Counter/ Induct/Inceiling with Pedigree II Soft Close Seat	712100SC


Button options: see 6.15.1

#### Inwall Installation

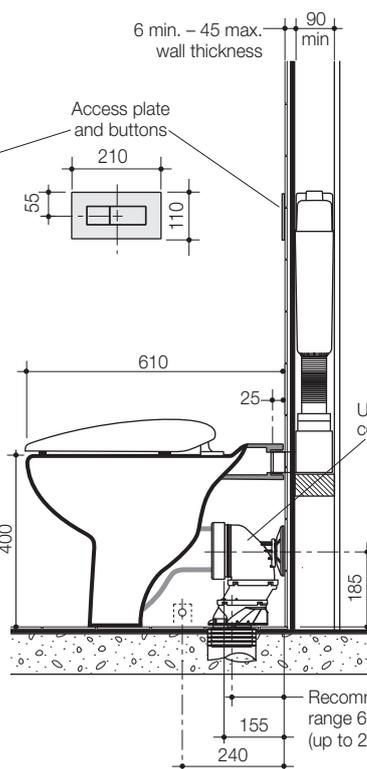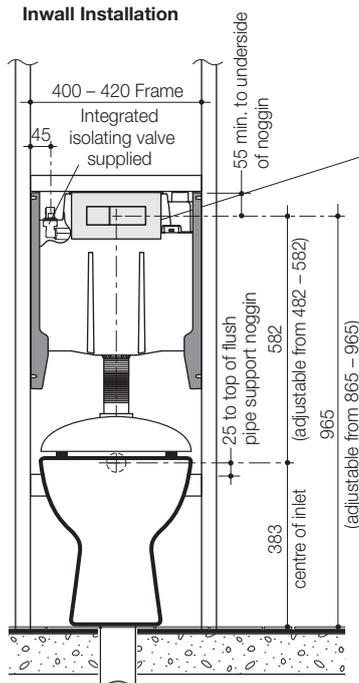

#### Under Counter Installation

(optional under counter flush pipe 237222 is required)

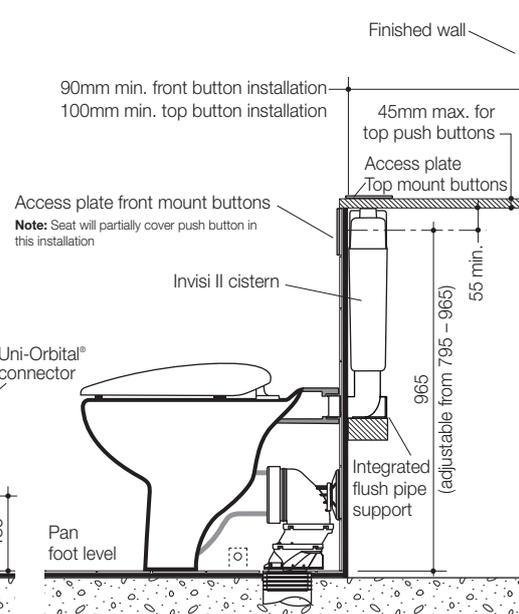

Recommended 90mm setout, range 60mm – 170mm (up to 25mm sideways adjustment)

**Note:** access to cistern internals can be achieved through either front or top mount button plate option.