Caroma

Junior 200

Vitreous China 4.5/3 litre Dual Flush Connector Toilet Suite

CI/SfB |(74.1) | g3 | Date May 2015

Supersedes all previous issues

3.79.1









Vitreous China 4.5/3 litre Dual Flush Connector Toilet Suite





Junior 200 'S' trap connector suite shown

The **Junior 200** connector toilet suites incorporate a reduced height toilet pan specially designed for infants. A new generation in water-saving technology sanitaryware product, the **Junior 200** connector toilet suite uses Caroma Smartflush technology to deliver a 4.5/3 litre dual flush vitreous china toilet suite system.

Pan: Junior 4.5/3 litre full flush wash down pan.

Traps: S and P-trap only. Slope of P-trap 95°.

Inlet: Dual purpose for 40mm or 50mm diameter flush pipe. Specify 50mm diameter

flush pipe for mid-level and low-level installations.

Cisterns: Vitreous china - Sovereign cistern (wall fixed version) - has a free fitting lid and is

suitable for domestic and light commercial applications.

Vandal Resistant Conversion Kit – A simple to install conversion kit is included for the standard mechanism to lock the lid onto the cistern, recommended for

use in heavy duty commercial areas. Cistern inlet stop valve and inlet flex tube connection is concealed within the

cistern and is included.

Inlet Valve Standard Bottom Inlet Cistern – available as right hand inlet which is Overflow: interchangeable and incorporates Apollo inlet valve. Internal overflow only.

interchangeable and incorporates Apollo inlet valve. Internal overflow only.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow

pressure. Rain water tank compliant.

Seats: The Junior standard toilet seat is supplied with the Junior 200 toilet suite. See

chapter 5.01 SEATS of the Caroma Technical Manual for further details.

Colours: White only.


Installation: The installation of the toilet suite shall be in accordance with the normal minimum

drainline grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing

variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications

without notice.

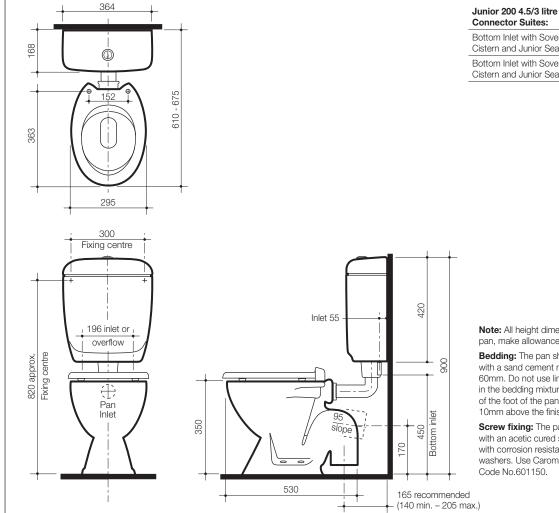

Connector Suites: Code No:

Bottom Inlet with Sovereign Cistern and Junior Seat

Bottom Inlet with Sovereign P trap 984256W

Cistern and Junior Seat

Note: All height dimensions to underside of pan, make allowance for bedding.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Screw fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with corrosion resistant screws and pan guard washers. Use Caroma screw fixing kit.

Code No.601150.