

Technical Specifications

VERSION 2022.01





Abask 6

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH2-85 x 40	TLN2-85 x 40	850 x 428 mm	6	52 Watts
TLH2-85 x 48 (*LV)	TLN2-85 x 48	850 x 508 mm	6	58 Watts
TLH2-85 x 60 (*LV)	TLN2-85 x 60	850 x 628 mm	6	66 Watts
TLH2-85 x 75 (*LV)	TLN2-85 x 75	850 x 778 mm	6	72 Watts
TLH2-85 x 90	TLN2-85 x 90	850 x 928 mm	6	93 Watts

NOTES


- This is a 240VAC product Earth connection is ESSENTIAL
- Safe to be installed in Zone 1 (wet areas)
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm²
- Non Heated version available (Less \$50)
- Plug-In version available (Plus \$50)
- *LV Low Voltage version Includes Transformer (+\$135)


STANDARD FINISHES

Mirror Polished	Brushed	Matt Black	Gunmetal	Brushed Gold
Stainless Steel	Stainless Steel	Painted	PVD	PVD
RRP	+20% (Stocked)	+40% (Stocked)	+50% (Stocked)	+60% (Stocked)

SPECIFICATIONS

Voltage 240 Volts	Standards AS/NZ 60335.2.43
Material Stainless Steel 304	Electrical Connection Concealed Wiring std - any leg
Finish Mirror Polished	Heating Method Dry Internal Heating Element
Ingress Protection IPX5 (Suitable for wet areas)	Options Non Heated,Plug-In,Low Voltage



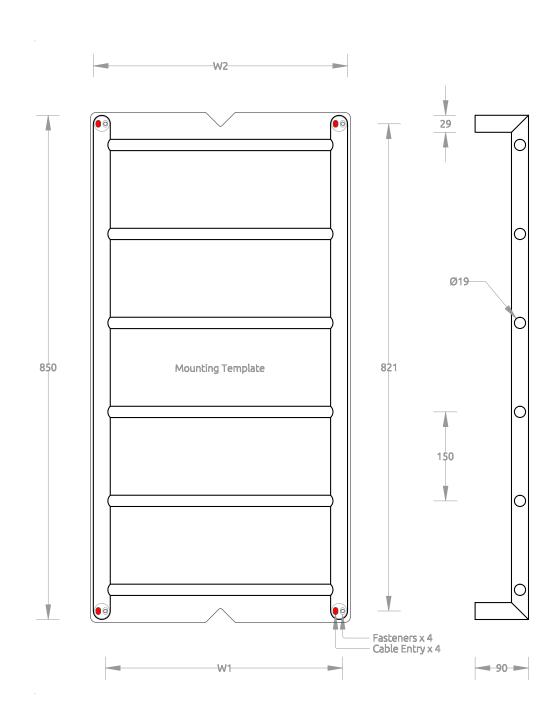



VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH2-85x40	TLN2-85x40	400mm	428mm
TLH2-85x48 (*LV)	TLN2-85x48	480mm	508mm
TLH2-85x60 (*LV)	TLN2-85x60	600mm	628mm
TLH2-85x75 (*LV)	TLN2-85x75	750mm	778mm
TLH2-85x90	TLN2-85x90	900mm	928mm