

M-150S

The go-to workhorse
for mobile fueling at 57 L/min



LEGACY OF RETAIL
FUEL TRANSFER SOLUTIONS

57
L/min | 15
GPM

12V DC
Voltage (Power Source)



Keep your hard-working crews

FUELED AND READY TO GO

with the M-150S

The GPI M-150S Fuel Transfer Pump delivers flow rates up to 57 L/min (15 GPM) and is available in a wide selection of configurations with an automatic or manual nozzle, mechanical meter combination, lockable or standard nozzle holders, and a variety of fuel hose lengths.

57 L/min mobile fueling keeps your farm, landscaping, construction or other hard-working crews fueled and ready to go.

DURABLE

The powder-coated motor can and diecast aluminum body makes it extremely dependable and lightweight. It is corrosion-resistant and ready to withstand years of work in any application.

PROTECTION

Lockable nozzle holder on select models protects your investment and deters theft.

LESS TO WORRY ABOUT

The rotary gear pump is engineered with fewer moving parts, which means less friction and wear on its components and longer life.

GET FUELING NOW

Select models feature convenient spin collar and factory-installed power cord making installation safe and easy.

GPI's Best-Selling Retail Fuel Transfer Pump!

**57 L/MIN FLOW
RATE**

*Empties a 100 gallon mobile
tank in approximately 7 minutes*

*Lightweight Design for minimal
stress on your tank*



*Sleek, low-profile design looks
great installed on any truck!*

GREAT PLAINS INDUSTRIES




M-150S

The go-to workhorse
for mobile fueling at 57 L/min



LEGACY OF RETAIL
FUEL TRANSFER SOLUTIONS

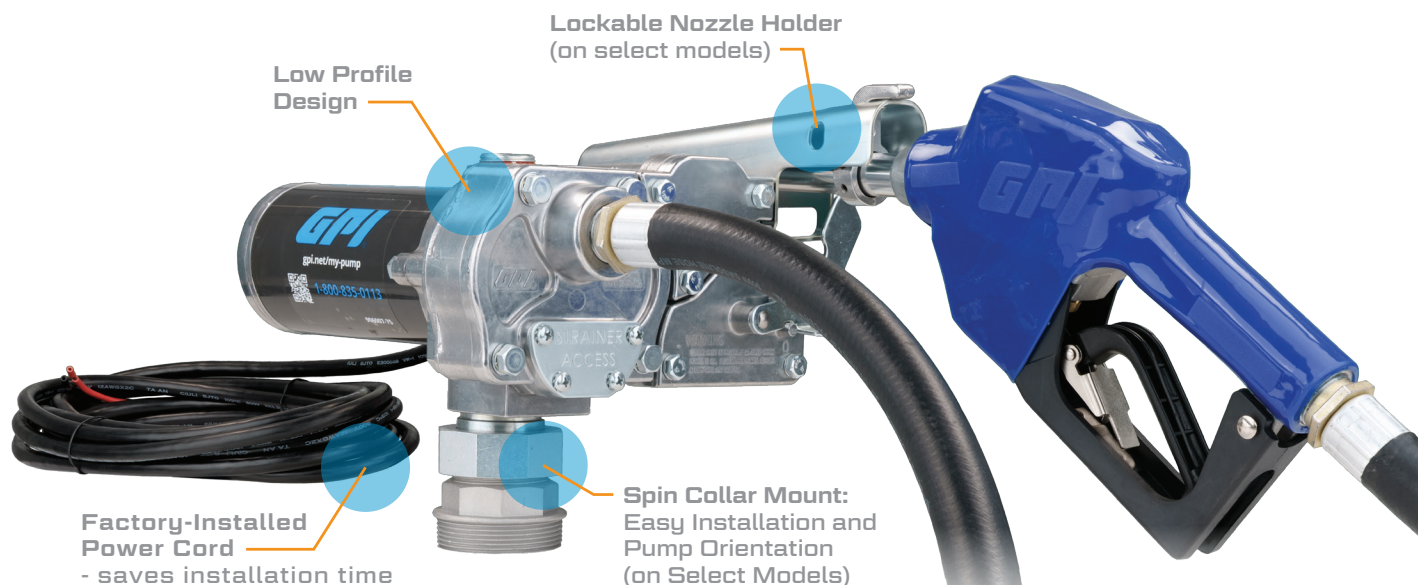

SPECS (ALL MODELS)

Max. Flow Rate:		57 L/min 15 GPM
Voltage, Input:		12V (DC)
Pump Technology:		Rotary Gear
Motor HP:		0.20
Duty Cycle:		30 min. on / 30 min. off
Max. Discharge Pressure:		Up to 1.03 bar (12 PSI)
Suction Pipe:		Polypropylene, Telescoping 15 to 40 in. x 1 in. MNPT (excludes pump only)
At Sea Level 70° F (21.1° C)	Suction Lift:	Up to 1.5 m (5 ft.)
	Discharge Lift:	Up to 4.5 m (15 ft.)
Pump Housing:		Powder-Coated Motor Can, Corrosion-Resistant Diecast Aluminum Body
Warranty:		Two-Year Pump Warranty

Refer to manual for wiring instructions

ADDITIONAL FEATURES:

- Circuit breaker motor protection
- Automatic or manual nozzle models available
- Unique strainer design allows for easy access and maintenance

FLUIDS⁺

Gasoline up to E15 | Diesel Fuel up to B20 | Kerosene Avgas (100LL)* | Jet A* | Jet A-1*

⁺See fluid compatibility of each pump model

*For ground-based refueling only. Do not use or mount in or on the aircraft. For use with aviation gasoline (Avgas 100LL), Jet A, and Jet A-1. User should consult NFPA 407 Standard for Aircraft Fuel Servicing for safety requirements during ground fuel servicing of aircraft using liquid petroleum fuels. This product has no actual or implied compliance with this standard. Owners and operators are responsible for compliance to all applicable regulations.



See Available Models

