



On when
it counts.



Application

- FMVSS 108 License Plate Light
- Compartment Light

Features & Benefits

- Integral wiring
- Potted low profile design
- Surface mounted
- Reverse polarity protected
- Maintenance saving
- Foam sealing gasket included

Mechanical Information

Mounting Hole Size 2 - .250 screw holes on 7.5" centers

Mounting Torque 12 – 14 in-lbs.

Electrical Specification

Nominal Voltage 12V and 24 VDC

Typical current
License Plate
12 VDC – 180 mA, 24 VDC – 50 mA
Compartment Light
12 VDC – 350 mA

Construction

Lens Material Hard coated polycarbonate




Sealing Method Potted

Connector* Delphi 1201-0973
+ to position A – to position B

Photometric

License Plate FMVSS108 Compliant
Compartment 130 LM output

* Consult Dialight for alternate connector options

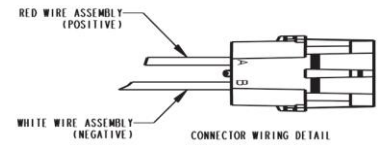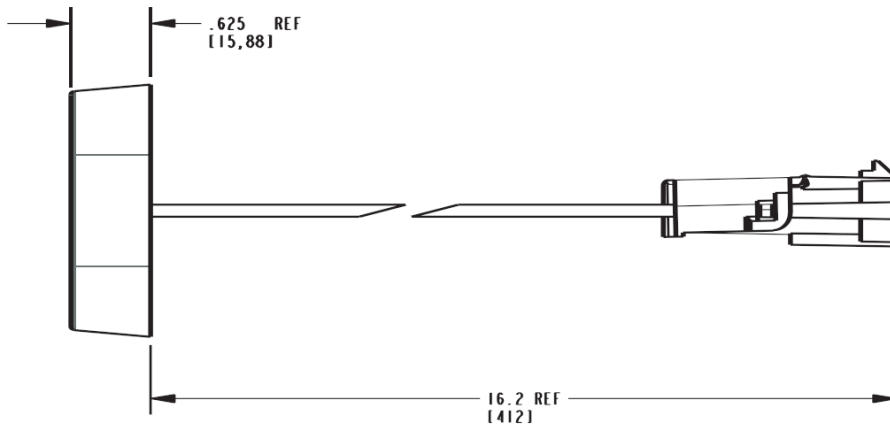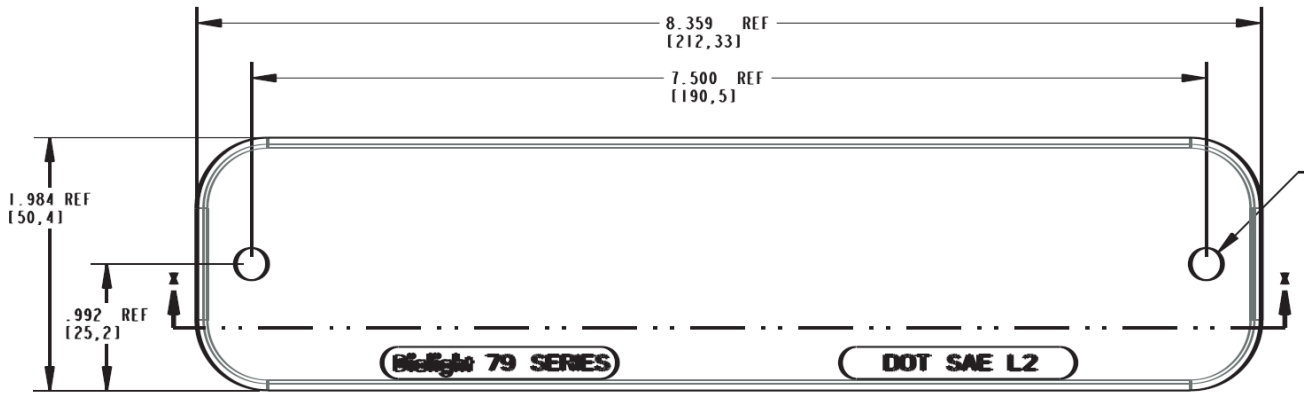

Part Number	Application	Voltage
79001CB	License Plate	12 V
79123CB	License Plate	24 V
79391CB	Compartment	12V