
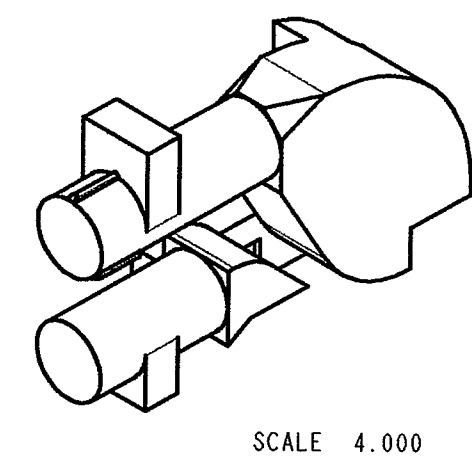
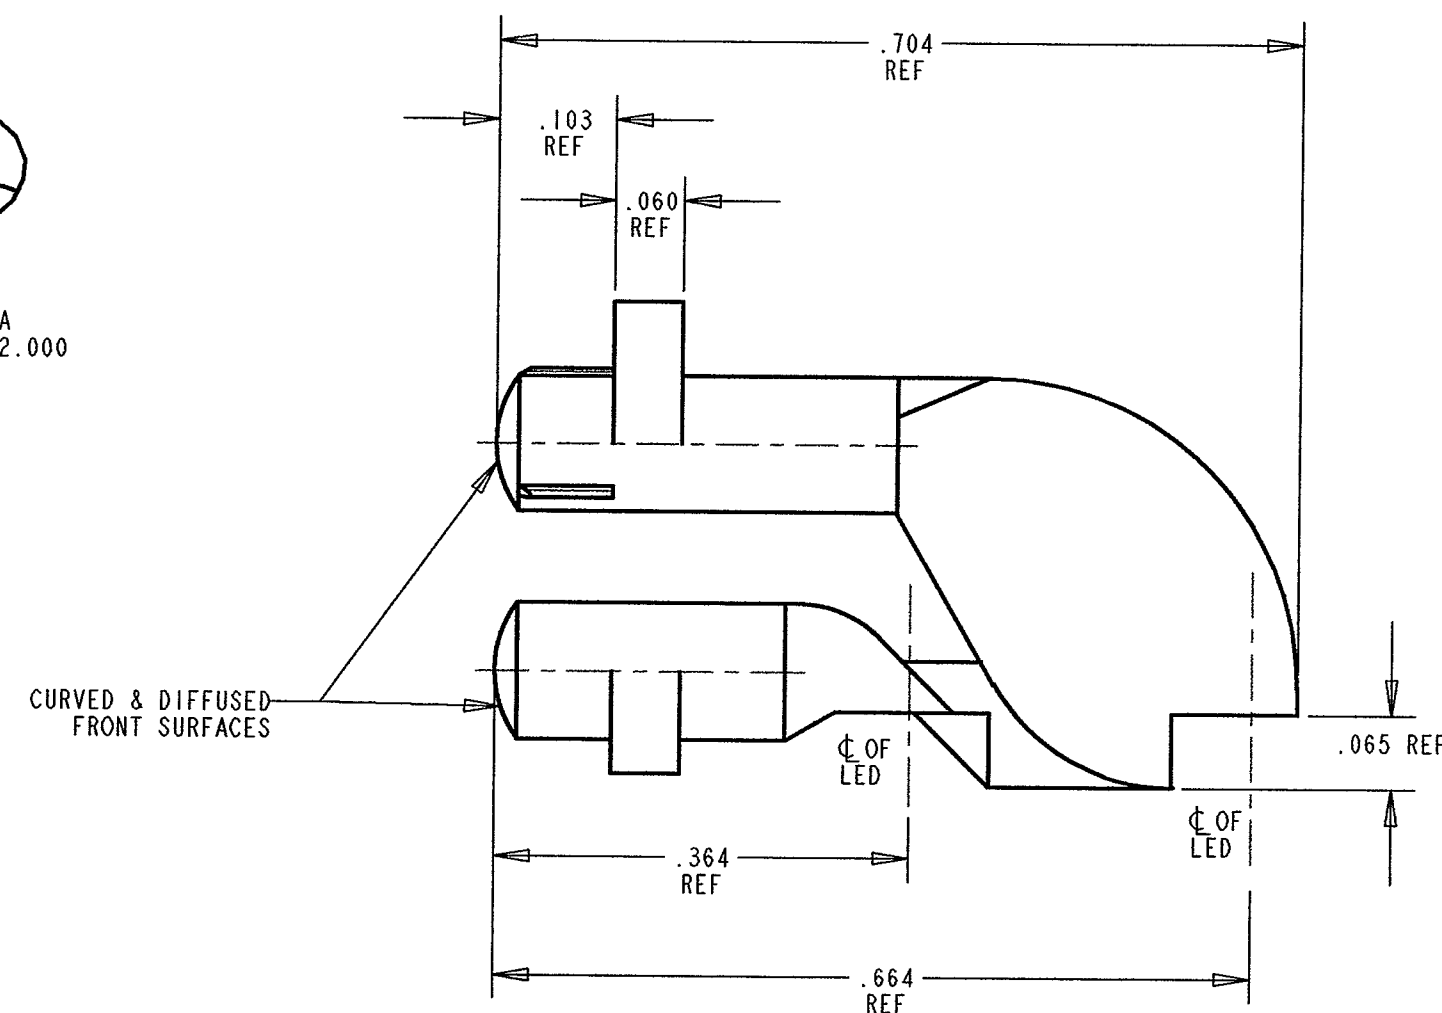
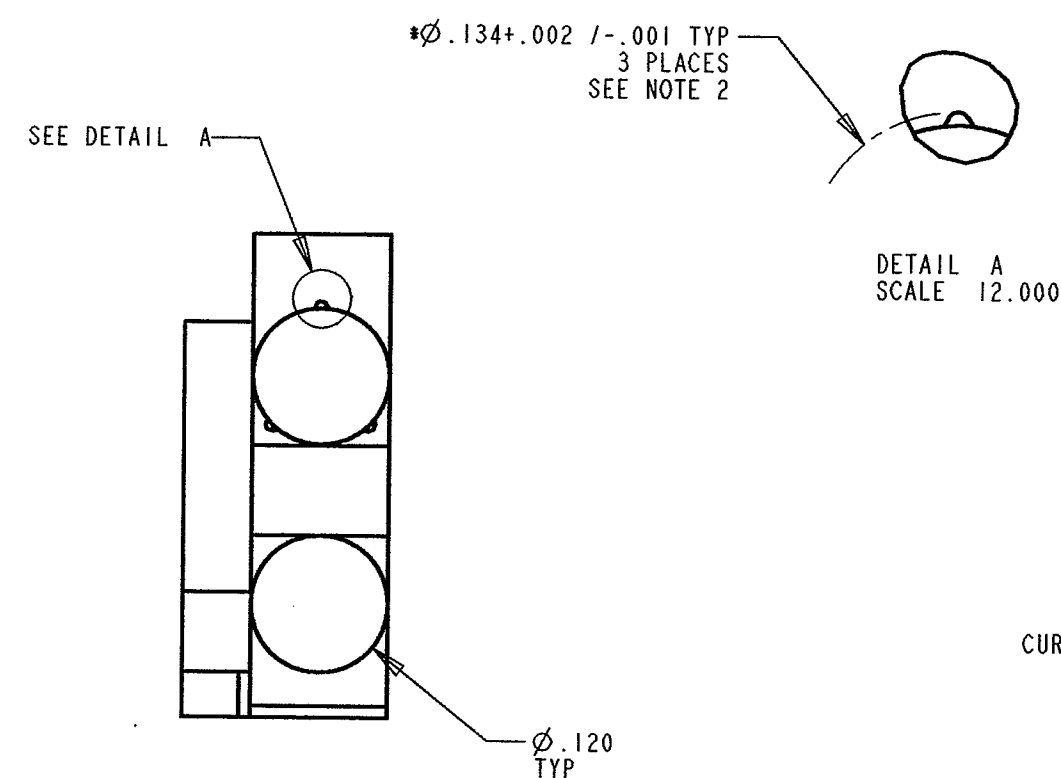
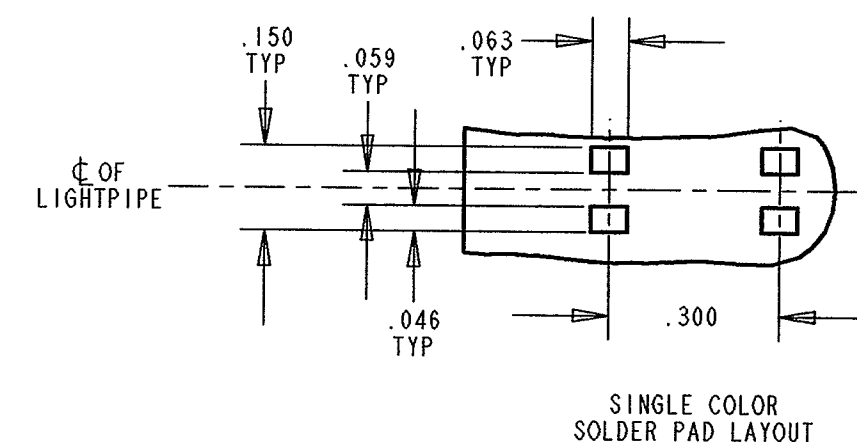
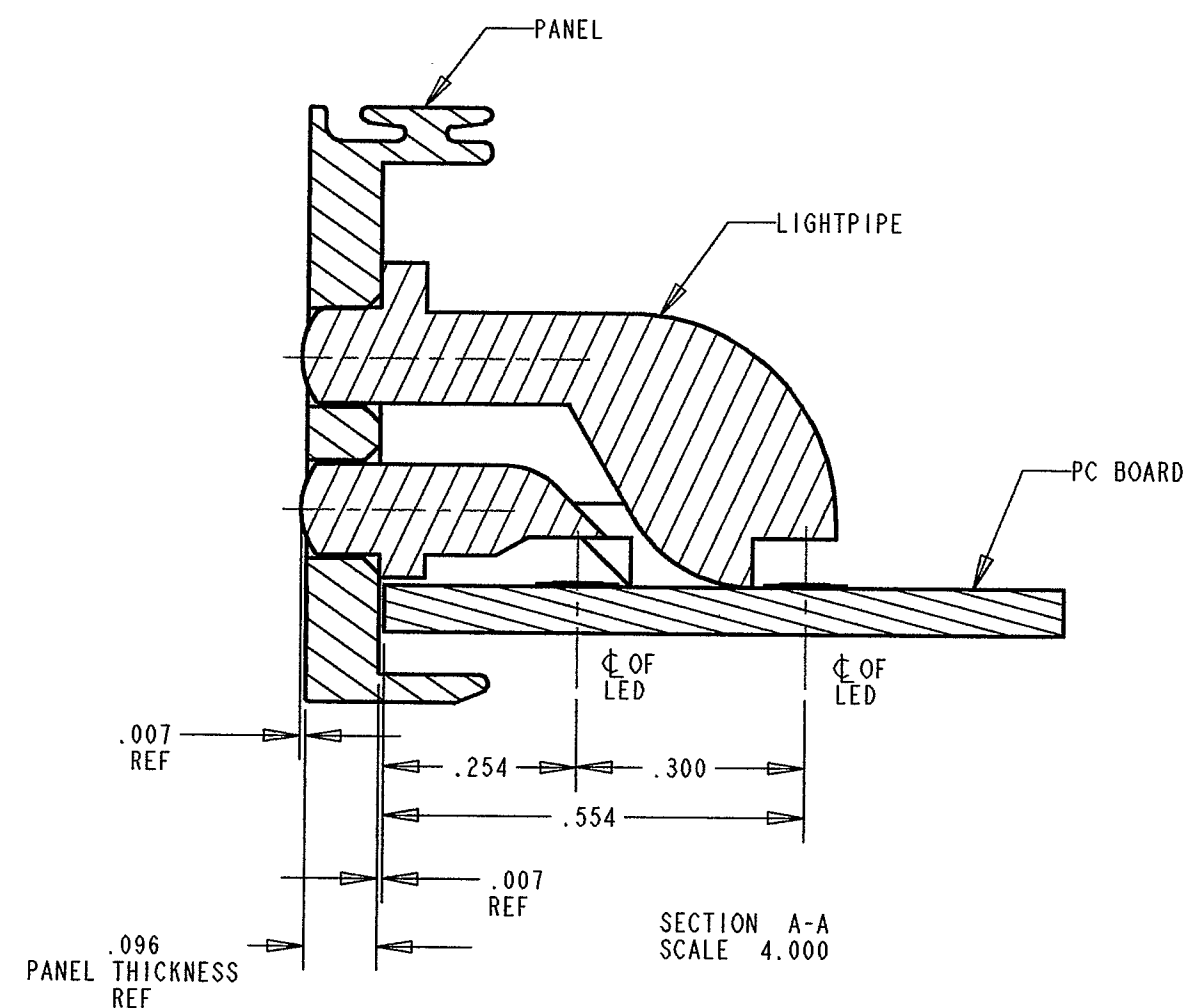


- NOTES:
1. COMPONENT TO BE MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE.
 2. COMPONENT DESIGNED TO BE PRESSED INTO FRONT PANEL
 3. MINIMUM ALLOWABLE PITCH IS .200 FOR EITHER BI-COLOR OR SINGLE. RECOMMENDED HOLE SIZE $\varnothing .130 \pm .002$.
 4. LIGHTSOURCES: SMT LED (DIALIGHT PART NUMBERS: 597-3XXI-5XXF OR 597-77XI-5XXF).
 5. *DENOTES CRITICAL DIMENSION OR SPECIFICATION
 6. DIALIGHT LIGHTPIPE PART NUMBER: 515-1156F.
 7. DRAFT & RADIUS AS REQUIRED TO FACILITATE MOLDING TO BE APPROVED BY DIALIGHT ENGINEERING.

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	TWC	7/8/10		5-12-06

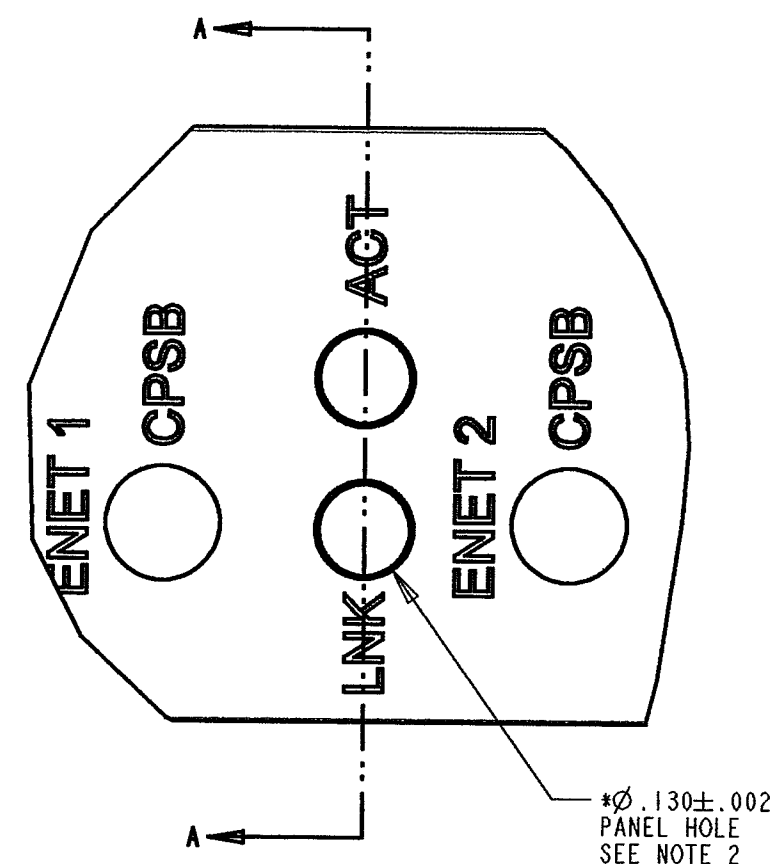

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: 3.000	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17382	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE BI-LEVEL LIGHTPIPE (EXTENDED) RoHS COMPLIANT	
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	MATERIAL NOTE 1	
FINISH:	Dialight	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727
FSCM 83330	SHEET 1 OF 1 FAMILY TABLE	