


REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	AJF	KLJ	NO	10-28-09
В		ADDED POLISHED SURFACE SPEC TO RIGHT SIDE VIEW	AJF	KLJ	NO	12-17-09


RoHS COMPLIANT 515-1167F


Part Numbers with the "F" suffix ending are RoHS Compliant, Packaging is marked with "RoHS Compliant" label or equivalent markings.

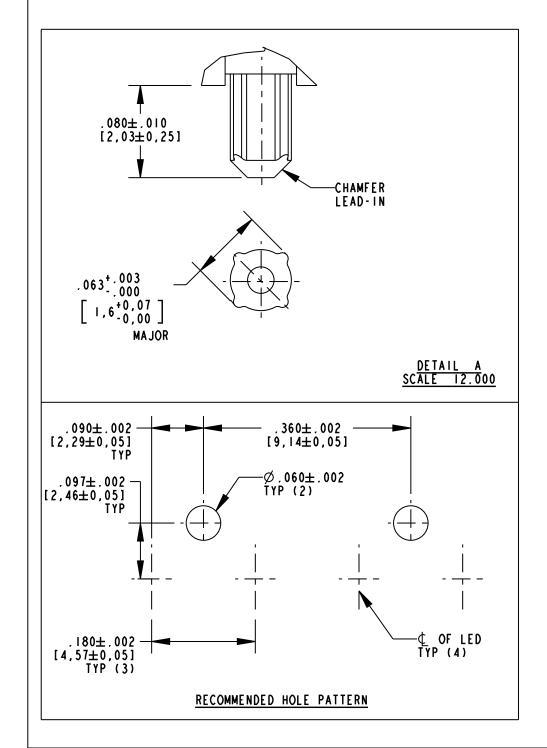

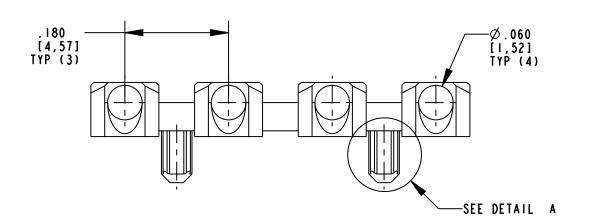

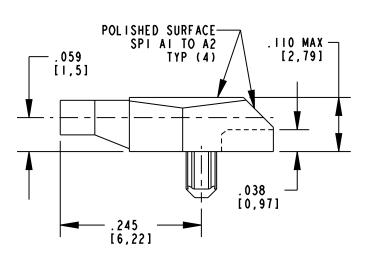

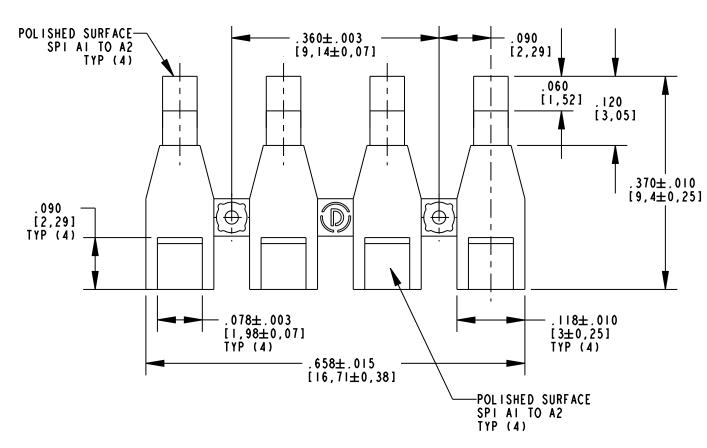



NOTES:

- I. DIALIGHT PART NUMBER 515-1167F
- 2. COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
- 3. UNLESS OTHERWISE SPECIFIED, SURFACES TO HAVE A FINISH OF SPI A2 TO A3.
- 4. MATERIAL TO BE CLEAR, TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY).
- 5. STORAGE AND OPERATING TEMPERATURE -30 TO +100°C.

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

TONDIDDEN WITHOUT THE WATTIEN CONSERT OF DIACTORY,								
SCALE: 6.000	DRAWING NUMBER	REV						
ALL DIM'S IN: INCHES (MM)		_						
TOLERANCES: UNLESS OTHERWISE SPECIFIED	515-1167F	В						
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005	TITLE 4 ELEMENT LIGHTPIPE							
ANGLES: ±3°	MATERIAL SEE BOM							
FINISH: -	Dialight 1501 ROUTE ;							
FSCM 83330	SHEET I OF I FAMILY TABLE:							