
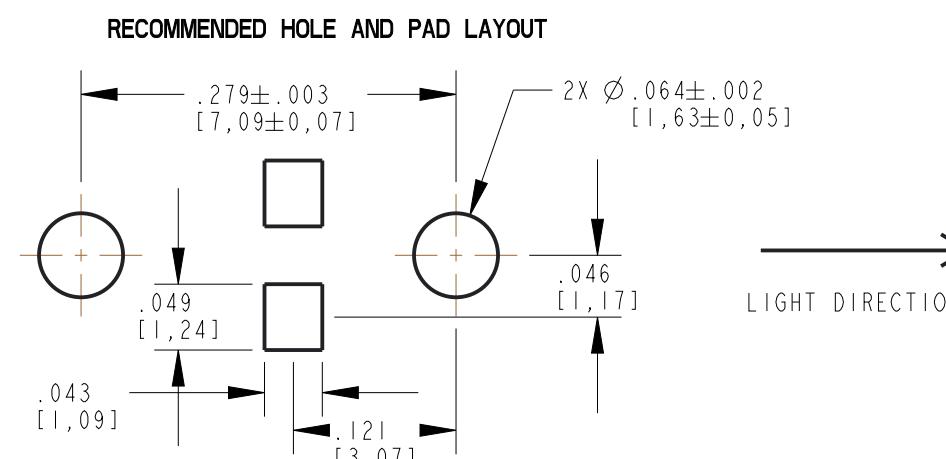
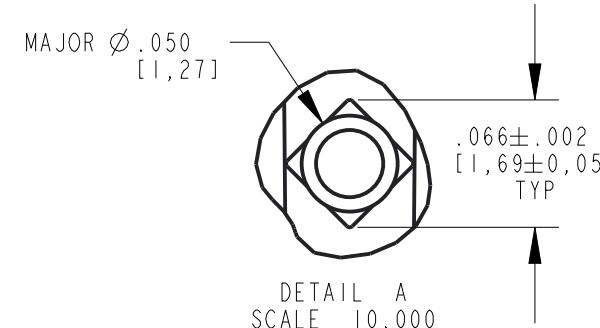
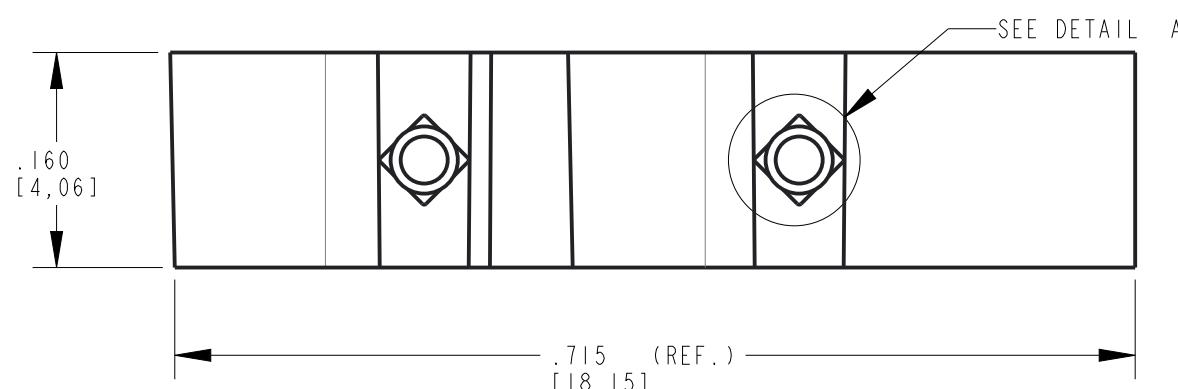
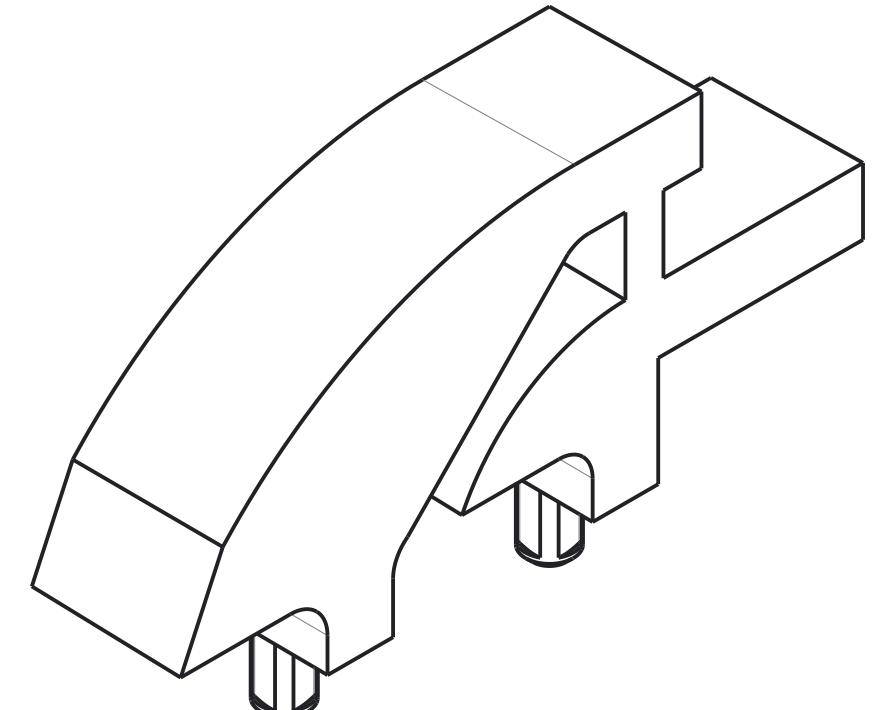
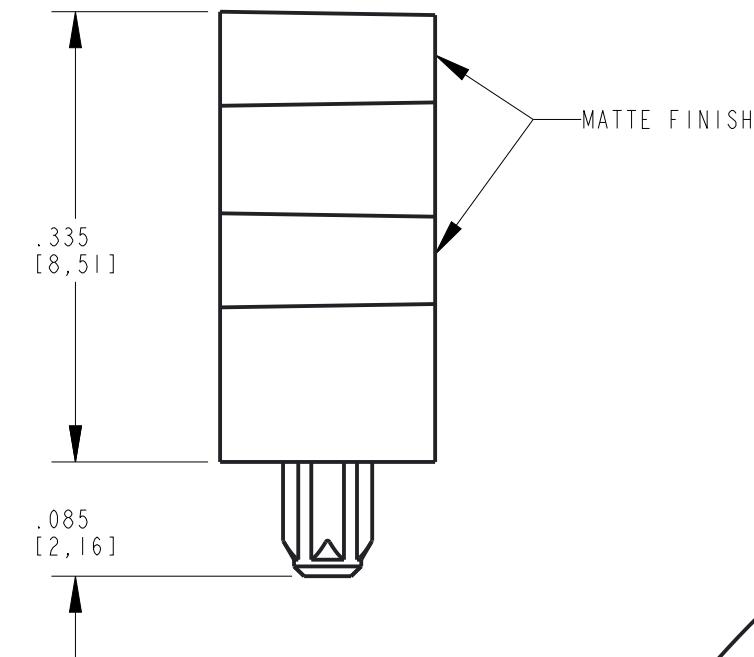


REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	102463	NEW RELEASE	LD	CS	NO	3-9-23
B	106118	UPDATED PAD LAYOUT	LD	CS	NO	6-8-23

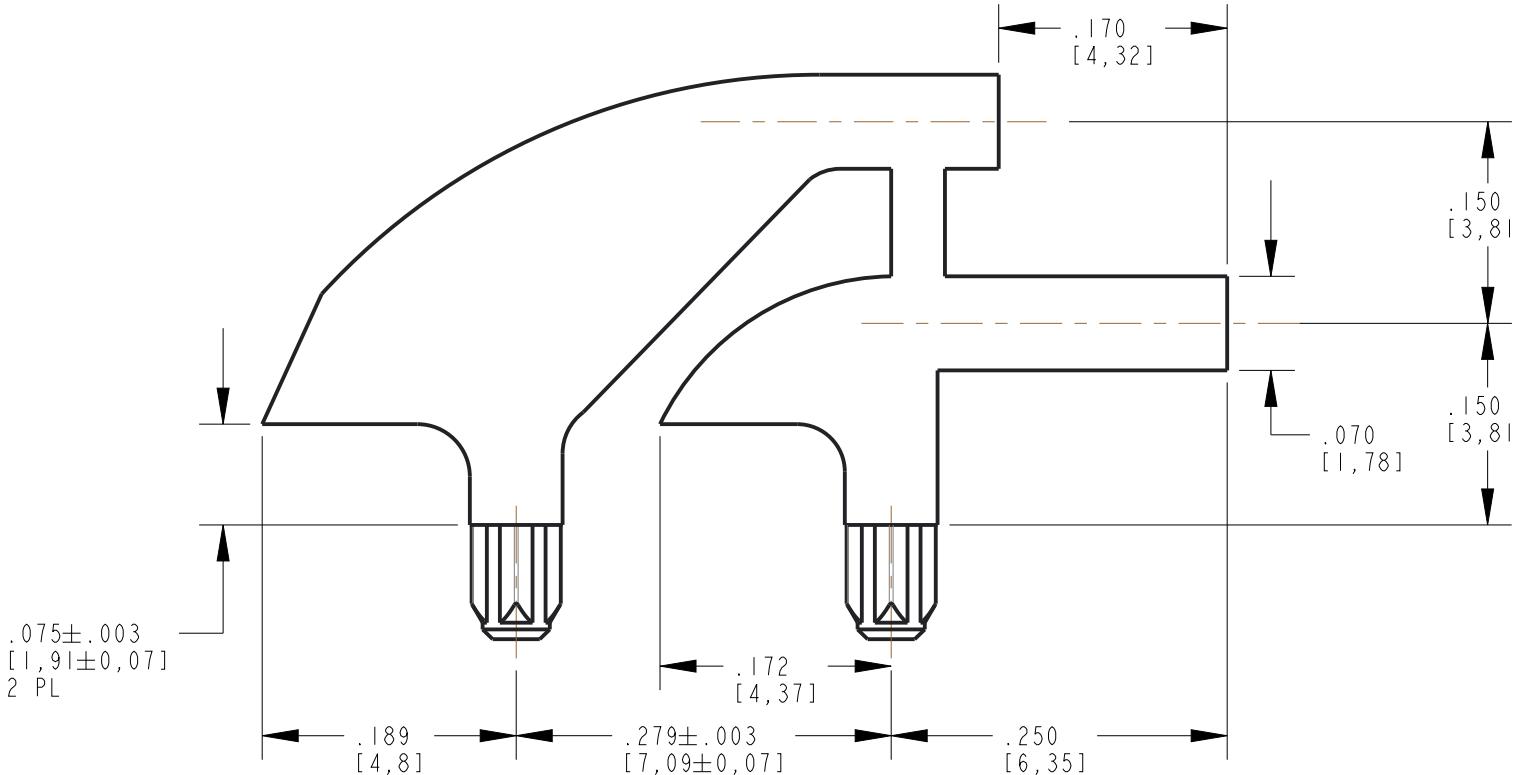

NOTES:

1. DIALIGHT PART NUMBER 515-1207F
2. MATERIAL TO BE CLEAR, TRANSMISSIBLE POLYCARBONATE (UL 94V-0 FLAMABILITY).
3. COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
4. STORAGE AND OPERATING TEMPERATURE: -30°C TO +100°C.
5. RECOMMENDED SURFACE MOUNT DIALIGHT LEDs: 597-3XXX-50XF (1208 PKG SINGLE COLOR)

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.

SCALE: 7.000	DRAWING NUMBER
ALL DIM's: INCH (mm)	C-18028
TOLERANCES: UNLESS OTHERWISE SPECIFIED	REV B
FRACTIONS: ±1/64	
DECIMALS (.XX): ±.010	
DECIMALS (.XXX): ±.005	
ANGLES: ±1°	
FINISH	
FSCM 83330	
SHEET 1 OF 1	FAMILY TABLE

**Dialight**

1501 ROUTE 34 SOUTH  
FARMINGDALE, NJ 07727  
(732) 919-3119  
www.dialight.com