

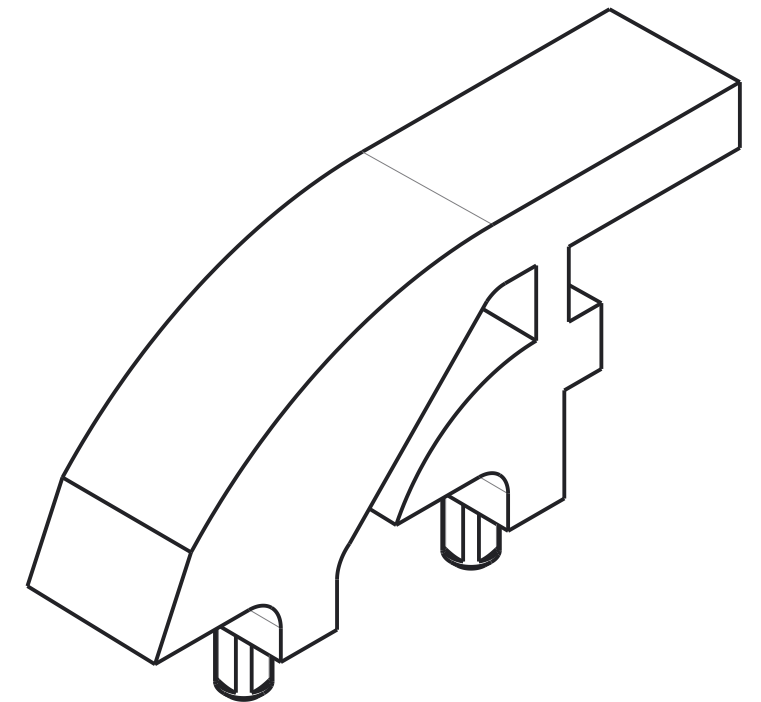
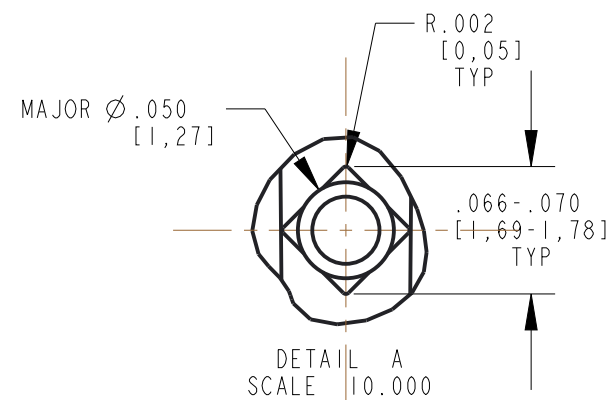
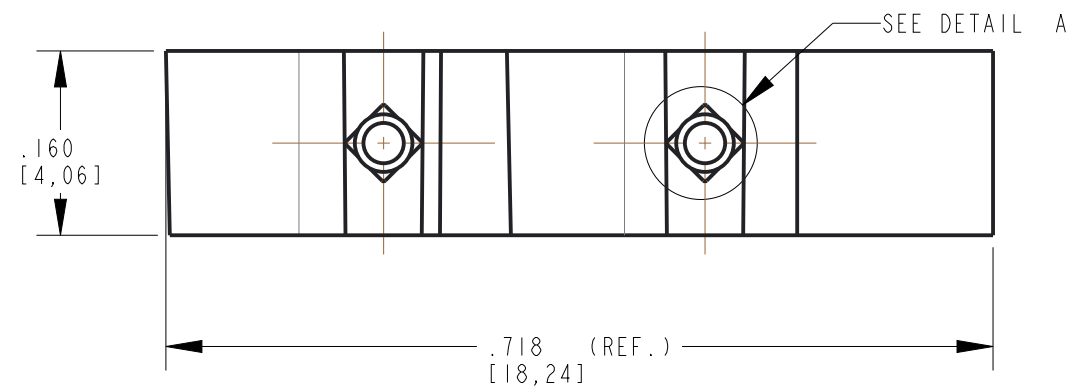
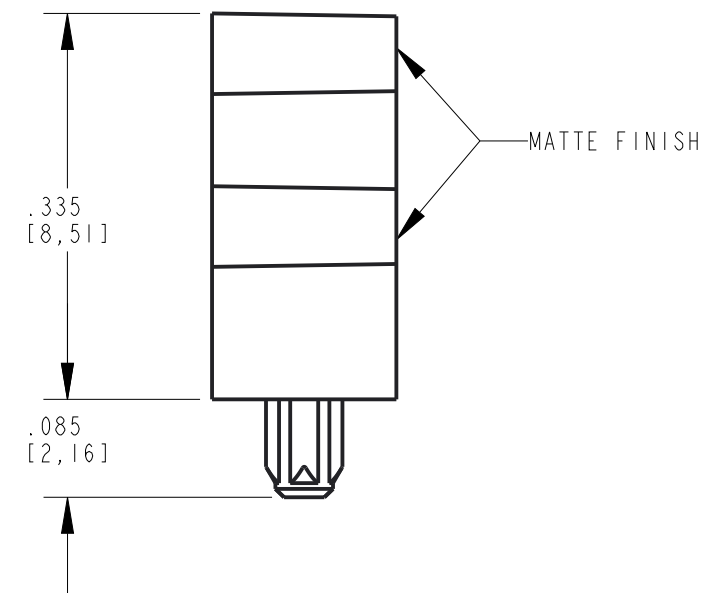


REV	ECN NO	REVISIONS	DRN	CKD	APP	QA	CM	DATE
A	106118	NEW RELEASE	LD	CS	NO			6-8-23

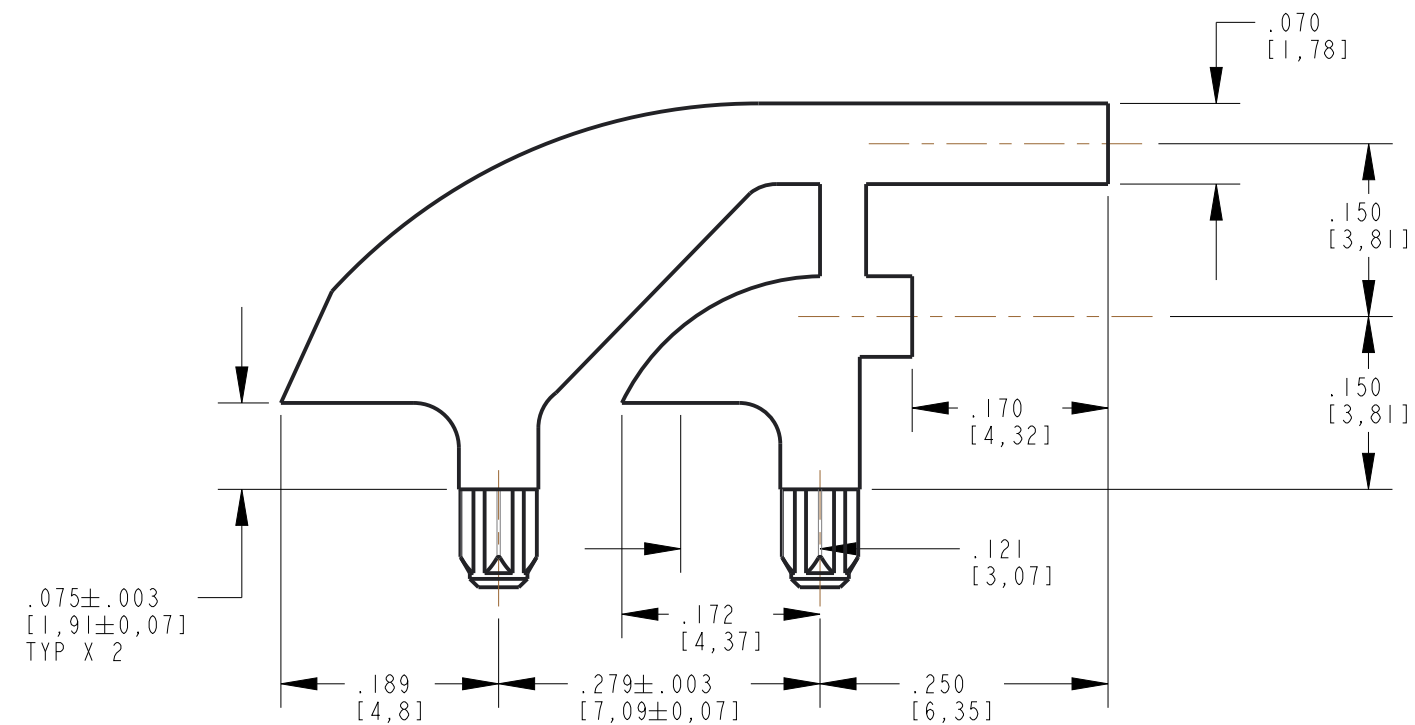

RECOMMENDED HOLE & PAD LAYOUT

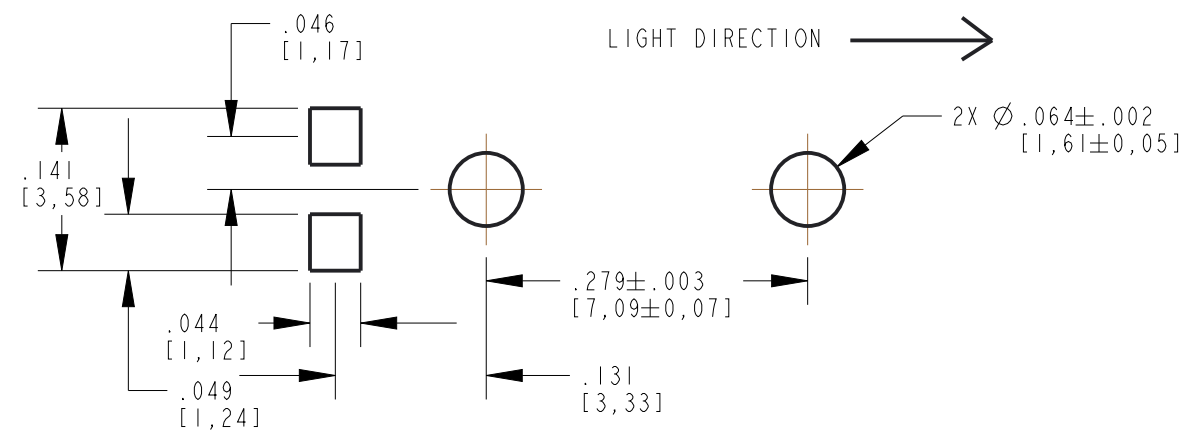

NOTES:

1. DIALIGHT PART NUMBER 515-1217F
2. MATERIAL TO BE CLEAR, TRANSMISSABLE POLYCARBONATE (UL 94V-0 FLAMABILITY).
3. COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
4. STORAGE AND OPERATING TEMPERATURE: -30 C TO +100 C.
5. RECOMMENDED SURFACE MOUNT DIALIGHT LEDS: 597-3XXX-507F (1208 PKG SINGLE COLOR)

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALE: 6.000 ALL DIM'S: INCH (mm)	DRAWING NUMBER C-18072	REV A
TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS: ±1/64 DECIMALS (.XX): ±.010 DECIMALS (.XXX): ±.005	TITLE SINGLE ELEMENT LP .070" X .160" RECT	
ANGLES: ±1° FINISH	MATERIAL SEE BOM	
FSCM 83330	Dialight 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com	
SHEET 1 OF 1 FAMILY TABLE:		