


REV ECN NO

98630

Α

REVISIONS

NEW RELEASE

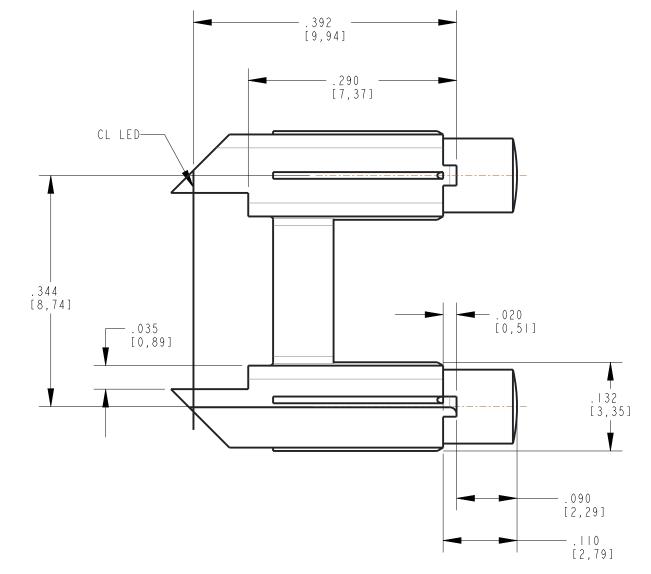

- I. COMPONENET TO BE MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE.
- 2. RECOMMENDED POSITION OF LED.
 3. ALL OPTICAL SURFACES TO HAVE FINISH AS REQUIRED FOR OPTIMUM LIGHT TRANSMISSINO.
 4. DIALIGHT PART NUMBER: 515-1035F

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.

DRN CKD APP QA

CS

LD

DATE

10-27-2

DIALIGHT CORP INTERNAL REFERENCE ONLY = 3D MODEL : 5151035F-A.5		
SCALE: 7.000	DRAWING NUMBER	REV
ALL DIM's: INCH (mm)		
TOLERANCES: UNLESS OTHERWISE SPECIFIED	C-18636	Α
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005	Z ELEMENT LIGHTPIPE	
DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	MATERIAL -	
FINISH -	- Dialight 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com	
FSCM 83330	SHEET I OF I FAMILY TABLE:	119111.0011