



### Certifications & Ratings

- RoHS compliant

### Application

The 655 Series LED Panel Mount Indicators are designed for a variety of applications such as.


- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

... and many more!


### Dimensions

inches [mm]

#### Flat Lens

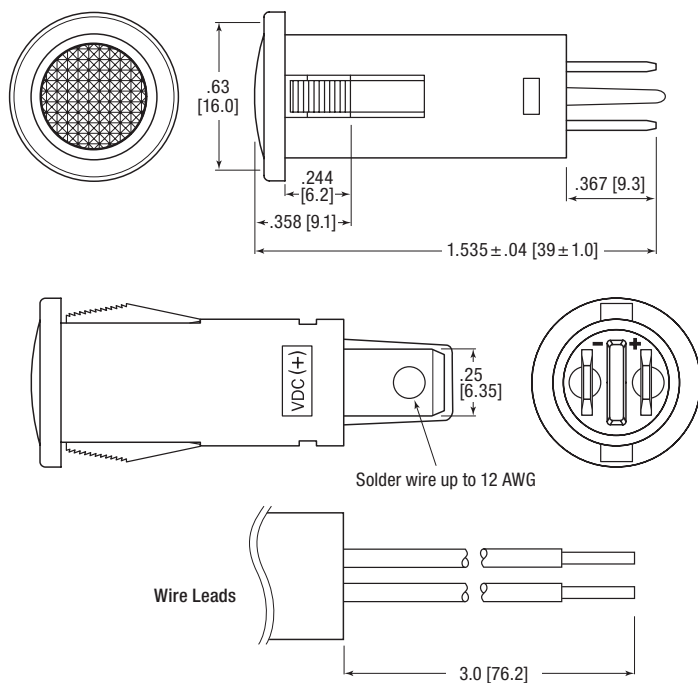

#### Domed Lens

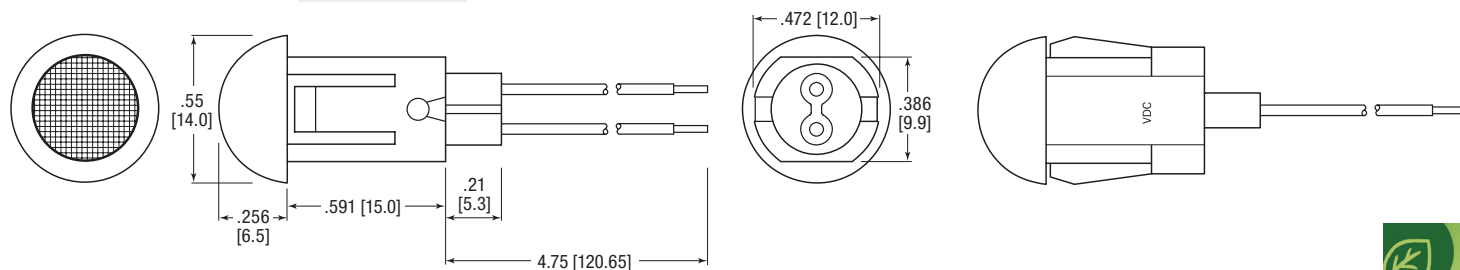

### Mechanical Information

**Mounting Hole Size:** 0.50" (12.7 mm)

**Max Panel Thickness:** 0.138" (3.5 mm) (Domed Lens);  
0.216" (5.5 mm) (Flat Lens)

### Specifications

**Voltage Options:** 12 & 24 VDC and 120 & 230 VAC (Flat Lens only), no resistor required

**Operating temp:** -20 °C to +85 °C (-4 °F to +185 °F)

**Storage Temp:** -20 °C to +85 °C (-4 °F to +185 °F)

**Electrical Connection:** 250 Faston quick connect terminals (Flat Lens only) or wire leads

**Housing:** Polycarbonate

**Terminals:** Brass—Nickel Plated (Flat Lens only)

**Wire Leads:** 18 AWG (Flat Lens),  
26 AWG (Domed Lens)



## Ordering Information 655 Series

Dialight P/N		Color	Voltage (VDC)	Current (mA)	Typical Intensity (mcd)
Wire Leads	Solder Terminals				





### Flat Lens

<a href="#">655-1103-103F</a>	<a href="#">655-1103-104F</a>	<div><div></div>Red</div>	12	20	270
<a href="#">655-1203-103F</a>	<a href="#">655-1203-104F</a>	<div><div></div>Green</div>			700
<a href="#">655-1303-103F</a>	<a href="#">655-1303-104F</a>	<div><div></div>Yellow</div>			200
<a href="#">655-1403-103F</a>	<a href="#">655-1403-104F</a>	<div><div></div>Blue</div>			100
<a href="#">655-1104-103F</a>	<a href="#">655-1104-104F</a>	<div><div></div>Red</div>	24		270
<a href="#">655-1204-103F</a>	<a href="#">655-1204-104F</a>	<div><div></div>Green</div>			700
<a href="#">655-1304-103F</a>	<a href="#">655-1304-104F</a>	<div><div></div>Yellow</div>			200
<a href="#">655-1404-103F</a>	<a href="#">655-1404-104F</a>	<div><div></div>Blue</div>			100

### Domed Lens

<a href="#">655-2103-103F</a>	NA	<div><div></div>Red</div>	12	20	3000
<a href="#">655-2203-103F</a>	NA	<div><div></div>Green</div>			2500
<a href="#">655-2303-103F</a>	NA	<div><div></div>Yellow</div>			1500
<a href="#">655-2403-103F</a>	NA	<div><div></div>Blue</div>			700
<a href="#">655-2104-103F</a>	NA	<div><div></div>Red</div>	24		3000
<a href="#">655-2204-103F</a>	NA	<div><div></div>Green</div>			2500
<a href="#">655-2304-103F</a>	NA	<div><div></div>Yellow</div>			1500
<a href="#">655-2404-103F</a>	NA	<div><div></div>Blue</div>			700

### Part Number Guide

6	5	5	-	X	X	X	-	1	0	X	F
		Lens Style				Voltage		Termination			
		Flat	1			3	12VDC	3	Wire Leads		
		Domed	2			4	24VDC	4	Solder Terminals (Flat Lens only)		
						5	120 VAC				
						9	230 VAC				
						(Flat Lens only)					
		Color									
		 Red	1	0							
		 Green	2	0							
		 Yellow	3	0							
		 Blue	4	0							

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.dialightsignalsandcomponents.com](http://www.dialightsignalsandcomponents.com)

**Warranty Statement:** Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.