

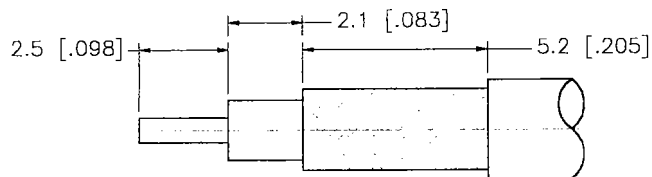
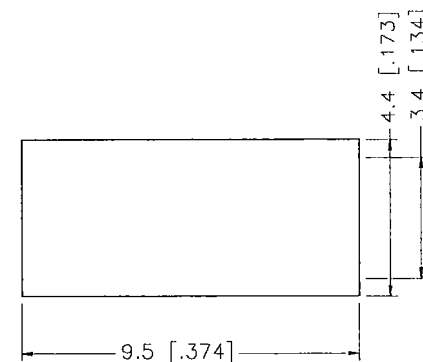



REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.

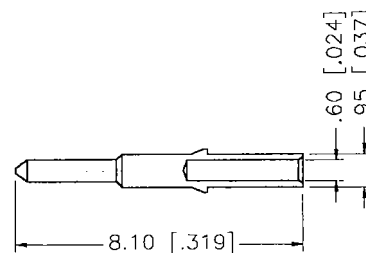

RECOMMENDED CABLE STRIPPING DIMENSIONS

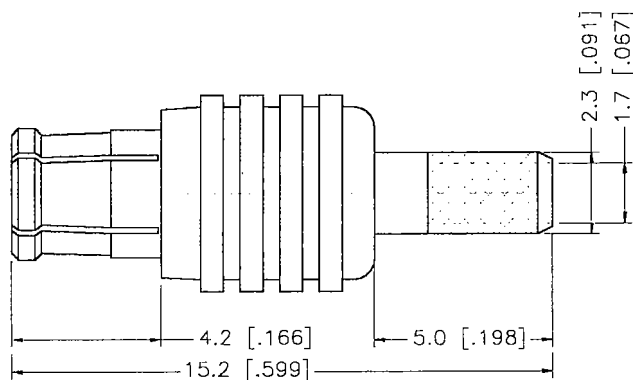

NOTE:
 USE .151 HEX CRIMP DIE TO TERMINATE FERRULE TO CABLE.
 - CONNEX TOOL 47-10160
 - IDEAL TOOL 36-489

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connex Connector Corporation					
1 HOUSING	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5--6 = ± 0.2 6--30 = ± 0.4 30--120 = ± 0.6 120--315 = ± 1 315--1000 = ± 1.6 1000--2000 = ± 2.4	DRAWN	G.R.S.					01/13/99	TITLE
2 BODY	BER. COPPER	NICKEL		CHECKED				MCX STRAIGHT CRIMP PLUG (FOR RG 316 DOUBLE BRAID)			
3 INSULATOR	TEFLON	NATURAL	DO NOT SCALE DRAWING	ISSUED				SIZE	FSCM NO.	DWG. NO.	REV.
4 INSULATOR	TEFLON	NATURAL		A	99001	252120.DWG	A				
5 CONTACT PIN	BRASS	GOLD 30 MIN.	SCALE	NA	PART NO.	252120	SHEET	1 OF 1			
6 FERRULE	COPPER	NICKEL									
7											
8											