



Technical Specifications

Electrical

Impedance	50Ω
Frequency Range	DC - 40 GHz
Voltage Rating	200 VRMS continuous Max
Dielectric Withstanding Voltage	600 VRMS Min
VSWR (Return Loss)	1.30:1 (-17.5 dB) Max
Insulation Resistance	5000 MΩ Min

Environmental

Temperature Range	-65°C to +165°C
RoHS Compliance	Compliant with Exemption 6C

Mechanical

Mating Cycles	500 Min
Coupling Mechanism	Threaded

Overview

Amphenol RF offers 2.92 mm connectors designed for precision laboratory use and SATCOM application. This connector series is engineered to offer low VSWR and excellent return and insertion loss, along with high power handling capabilities. 2.92 connectors are sometimes referred to as K connectors and have the ability to mate with SMA, 3.5 mm and other K or 2.92 mm interconnects.

2.92 mm connectors utilize a smaller internal body diameter and unique air dielectric which allows it to operate up to 40 GHz. With a shorter male pin than both the SMA and 3.5 mm connector, the bodies of the male and female connectors engage before the pin and socket contacts. This feature mitigates wear from mating misalignment with dissimilar interfaces.

Features and Benefits

- High performance up to 40 GHz
- Low VSWR
- Excellent return loss and insertion loss
- Ruggedized construction for repeatability
- Compatible to mate with SMA and 3.5 mm connectors, and other K or 2.92 mm interfaces
- Connector interface meets MIL-STD-348 standard

Applications


- Optical Testing
- Lab & Bench Testing
- Military
- Satellite Communication Equipment (SATCOM)
- Microwave
- Quantum Computing

Amphenol RF

Four Old Newtown Road
Danbury, CT 06810

For more information visit www.amphenolrf.com
or call 800.627.7100

Interface Dimensions

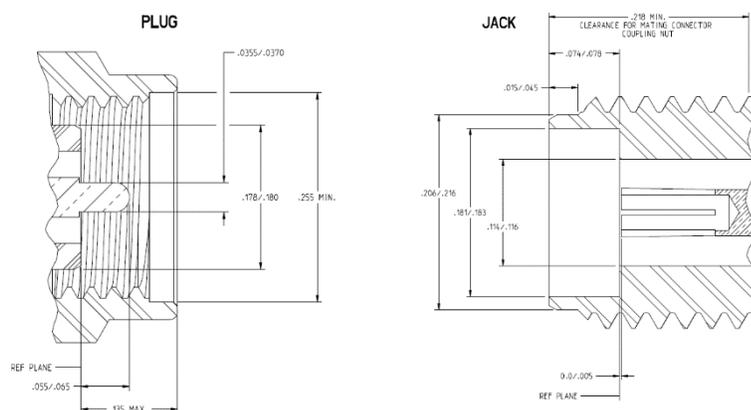

Also Available:
Pre-configured 2.92 mm Cable Assemblies