


6" CHANNEL EQUIPMENT TILT (T6)



Length: 16-24' Load Angle: 11°
 Deck Height: 21" Deck Width: 82"
 Couplers: Bumper Pull, Gooseneck, & Pintle

GVWR: 14,000 - 15,680 lbs.
 Load Capacity: 10,580 lbs (20 ft Bumper Pull)
 Weight: 3,420 lbs (20 ft Bumper Pull)

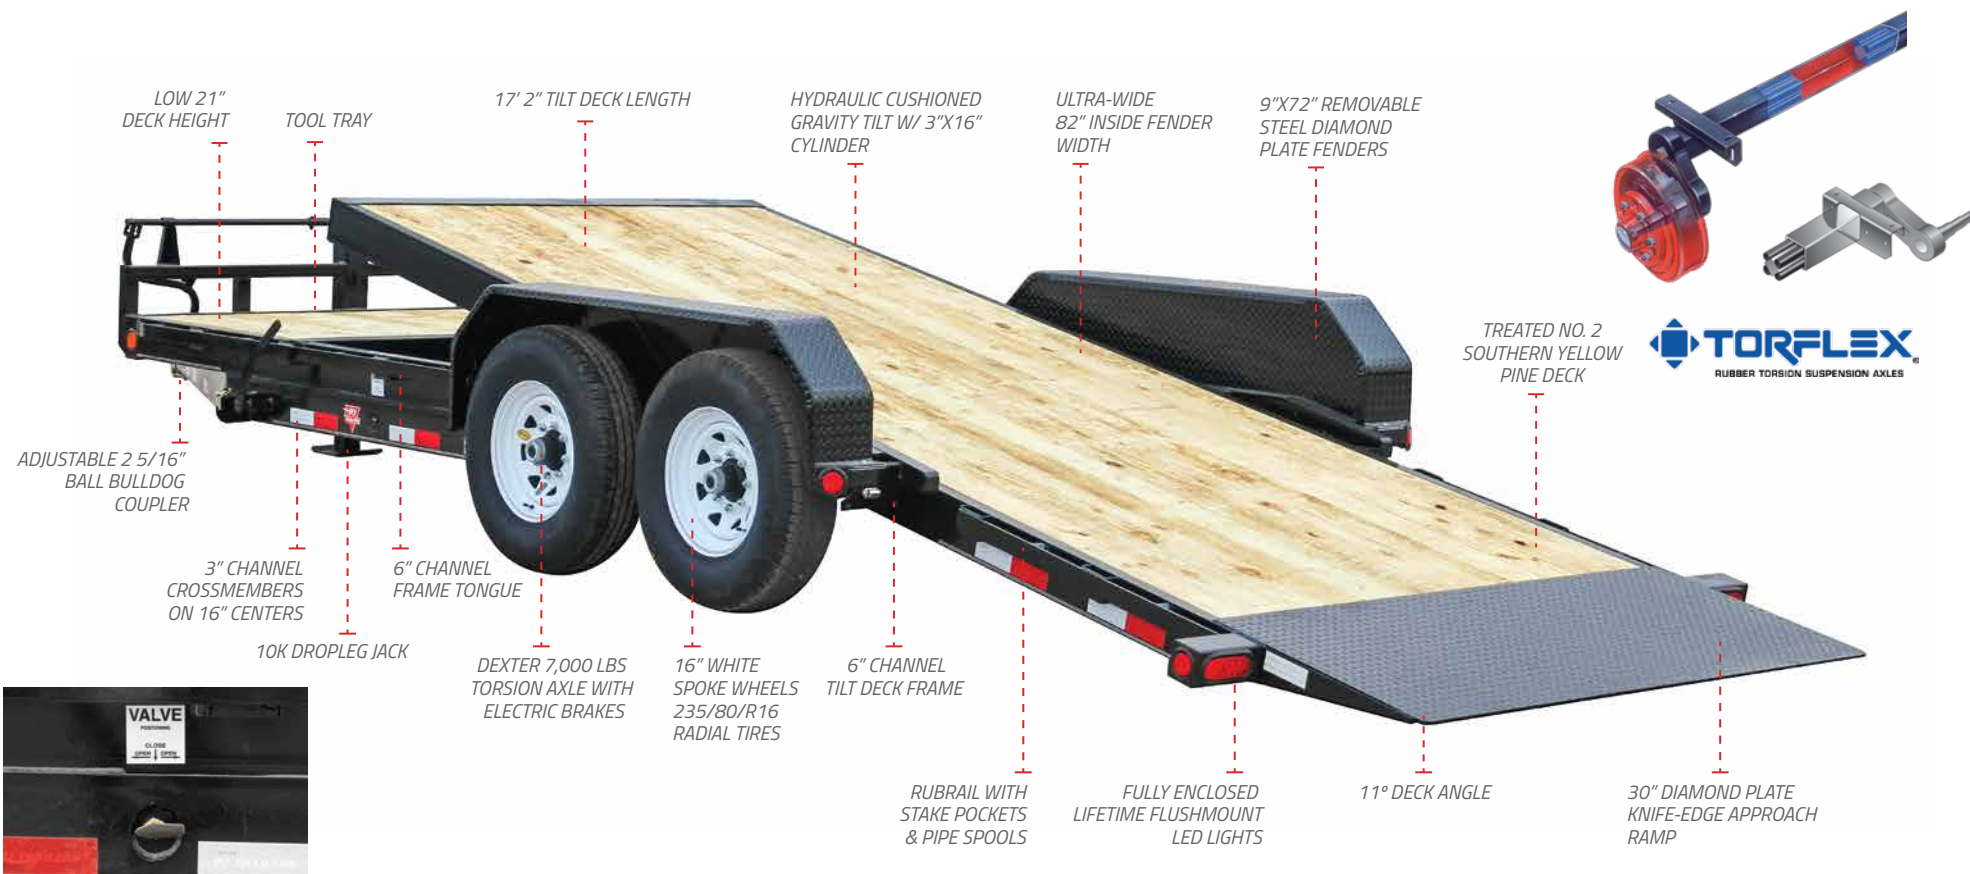

HYDRAULIC PROPORTIONING VALVE



Hydraulic Cushioned Gravity Tilt
 Our gravity tilts use a hydraulic cylinder, reservoir, and proportioning valve to control the rate the trailer tilts.



Knife-Edge Tail
 Our 30" diamond plate knife-edge tail makes it super easy to load low clearance equipment like scissor lifts and fork lifts.



Low Load Angles
 The use of torsion axles and our unique frame design allow us to keep our deck heights low, giving us extremely low load angles.

| | | | | | | | | | | | | | | | | |
|--------------------|------------------|---------------------------------------|---------------------|----------------------------|-----------------------------|--------------------------------|----------------------------------|--------------------|------------------|----------------------------|-------------------|-----------------|-------------------|---------------|---------------------|-------------------------------|
| 21" DECK HEIGHT | 14k BASE GVWR | 2 5/16" ADJUSTABLE BULLDOG COUPLER | 6" CHANNEL FRAME | 3" CHANNEL CROSSMEMBERS | STEEL DIAMOND PLATE FENDERS | 14 PLY 235/80/R16 RADIAL TIRES | DEXTER AXLE DEXTER EZ LUBE AXLES | TORSION SUSPENSION | 82" WIDE DECK | 16" CROSSMEMBER CENTERS | 11° LOAD ANGLE | KNIFE-EDGE TAIL | TREATED PINE DECK | 7-WAY RV PLUG | LIFETIME LED LIGHTS | SHERRILL WILLIAMS POWDER COAT |
|--------------------|------------------|---------------------------------------|---------------------|----------------------------|-----------------------------|--------------------------------|----------------------------------|--------------------|------------------|----------------------------|-------------------|-----------------|-------------------|---------------|---------------------|-------------------------------|