

HORIZONTAL, 3U, 84HP

- Advanced EMC shielded 19" chassis, powder coated black (RAL 9005)
- Applicable for CompactPCI, CompactPCI Packet Switching (cPSB) PICMG 2.16, VMEbus and VME64x backplanes
- System platform for horizontal boards (6 U)
- Fan speed controlled by Elma's FanCon in order to min. noise
- ON/OFF Switch: rear

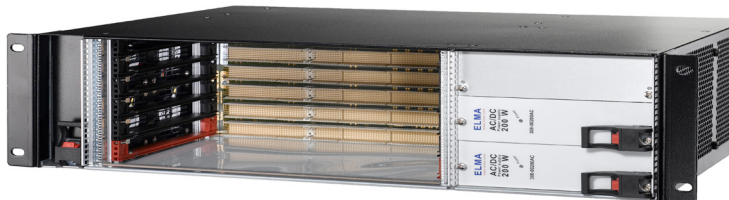


Image similar

SPECIFICATIONS

Backplane

Type	VMEbus, VITA 1.0
Slots	6
System slot	Arbiter in slot 1
Orientation	Horizontal

Dimensions

Height	3U
Width	84HP
Depth	298 mm
Weight	Approx. 8 kg

Cooling

Air flow front, free blow	252 m³/h
Air flow rear, free blow	126 m³/h

Power supply

Output (max.)	250 W (pluggable)
Output voltages per unit (max.)	+3.3 V: 40 A, +5 V: 40 A, +12 V: 5.5 A, -12 V: 2 A
Input voltage	100 – 240 VAC
Frequency	47 – 63 Hz

Environmental Data

Operating temperature range:	0 °C to +50 °C
Storage temperature range:	-40 °C to +80 °C
Humidity	30 % - 80 %, non-condensing

Card cage

Front	160 mm
Rear I/O	80 mm

Part number

384H2-V06L-25PA1-100