



S-ANCHOR

Anchor

S-Anchors are specially designed for window washing, façade maintenance operations, or other applications where workers are required to be in full suspension. The oversized, extra-long post gives additional flexibility when installing through finished roofs to accommodate a variety of finish materials. When not used in tie-back applications, the S-Anchor can be used as a standard fall protection anchor.


**HEIGHT SAFETY.
SIMPLIFIED.**

guardianfall.com



S-ANCHOR

Anchor

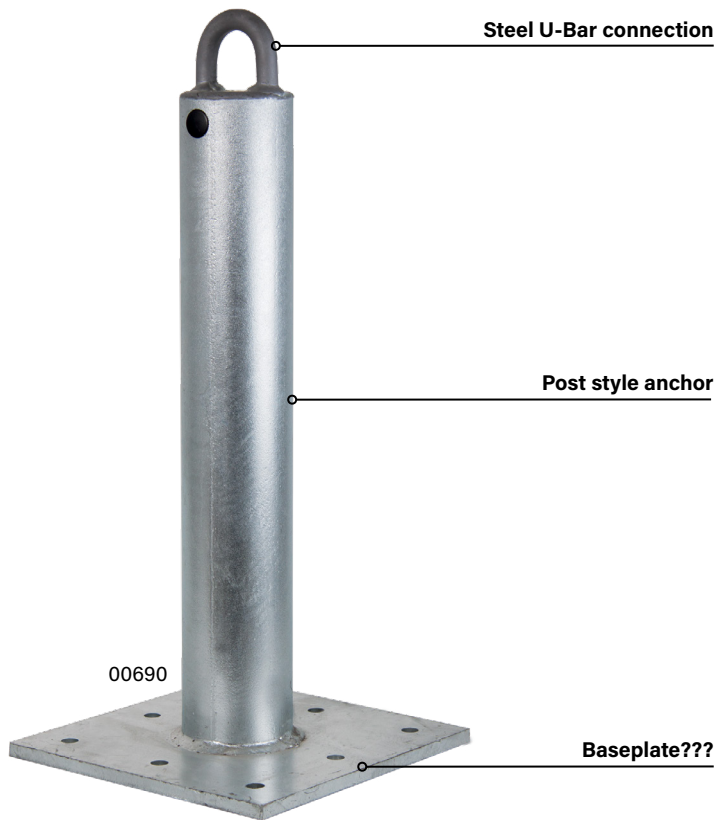

Key features & benefits

Steel U-bar connection

Sturdy and secure connection point for either window washing fall protection systems

Post style anchor

Designed for tie-back or suspension applications

Easy to install

Custom post heights are available

Contact our [Engineered Systems](#) team for more information on custom fall protection plans & services

Specifications

Maximum weight range | 130-420 lbs

Materials | Galvanized steel

Minimum breaking strength | 5,000 lbs

| Part number (s) | Description | Material | User Weight Range |
|-----------------|--|------------------|-------------------|
| 00690 | 24" post, U-bar top, non-swivel, for concrete substrates | Galvanized steel | 130-420 lbs |
| 00653 | 24" post, Swivel top, for concrete substrates | Galvanized steel | 130-420 lbs |

Declaration of conformity

This product has been tested in an ISO 17025 certified laboratory in accordance with all requirements specified by ANSI Z359.7-2019. All testing is validated by a third party professional engineer.

This product is compliant with the following safety regulations:
ANSI Z359.18-17 | OSHA 1910.140 & 1926.502

For more information:

+1 (800) 466 6385

info@guardianfall.com



Designed, tested,
and assembled in
the **United States**