


# 72" Wire Tether Attachment for Angle Grinders


Installation and Usage Instructions  
L72WRGRND

85519 (Rev. A)

## Parts List:

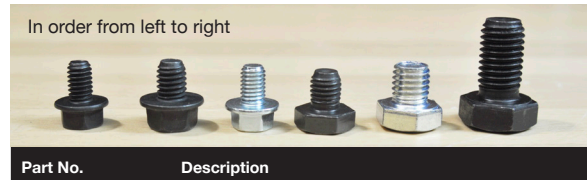

Part No.	Description
5/16-18	1/2"L Flange Head Cap Screw
3/8-16	1/2"L Flange Head Cap Screw
M 8x1.25mm	12mmL Flange Head Cap Screw
M 10x1.5mm	12mmL Cap Screw
M 12x1.75mm	12mmL Cap Screw
M 14x2.0mm	25mmL Cap Screw
OWS6OR	Tie Off Strap

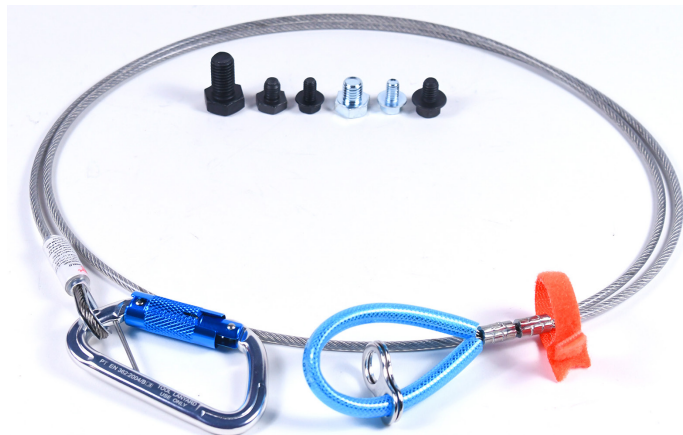

Max. Weight: 10 lbs (4.5 kg)

NOTE: This kit fits most name brand angle grinders. Verify this kit has the proper bolting to fit your specific bolt size.

## WARNINGS

ALWAYS WEAR APPROPRIATE PROTECTIVE EQUIPMENT. IMPROPER USE COULD RESULT IN DEATH OR DISMEMBERMENT. IF ANY CRACKS, RIPS OR TEARS ARE NOTED, PRODUCT REPLACEMENT IS REQUIRED.

## STEP 1



Figure 1



Figure 2

- Remove the handle and install the first loop to the handle bolt and re-install into the factory threaded hole. (Fig. 1)
- Install the second loop to the selected supplied bolt and install into the factory threaded hole opposite the handle. (Fig. 2)
- Tighten enough so the bolt and handle will not vibrate loose. Over-tightening can cause threads to strip.

## STEP 2



If tether management is desired, be sure to tie off the tether loosely to the power cord to prevent damage.

INSTALLATION



STRONGHOLD

Ty-Flot, Inc. • 305 Massabesic Street • Manchester, NH 03103  
www.ty-flot.com • Phone: 603-669-5169 • Fax: 603-669-5113

CUTTING-EDGE PREVENTION™