


## SKYHOOK ROOF ANCHOR

ANCHORAGE CONNECTOR

### FEATURES & BENEFITS

- Fits wide variety of roof pitches
- Compatible with horizontal lifelines
- Powder-coated steel increases durability and provides weatherproofing
- Can be easily installed to wood or metal substrates
- High visibility

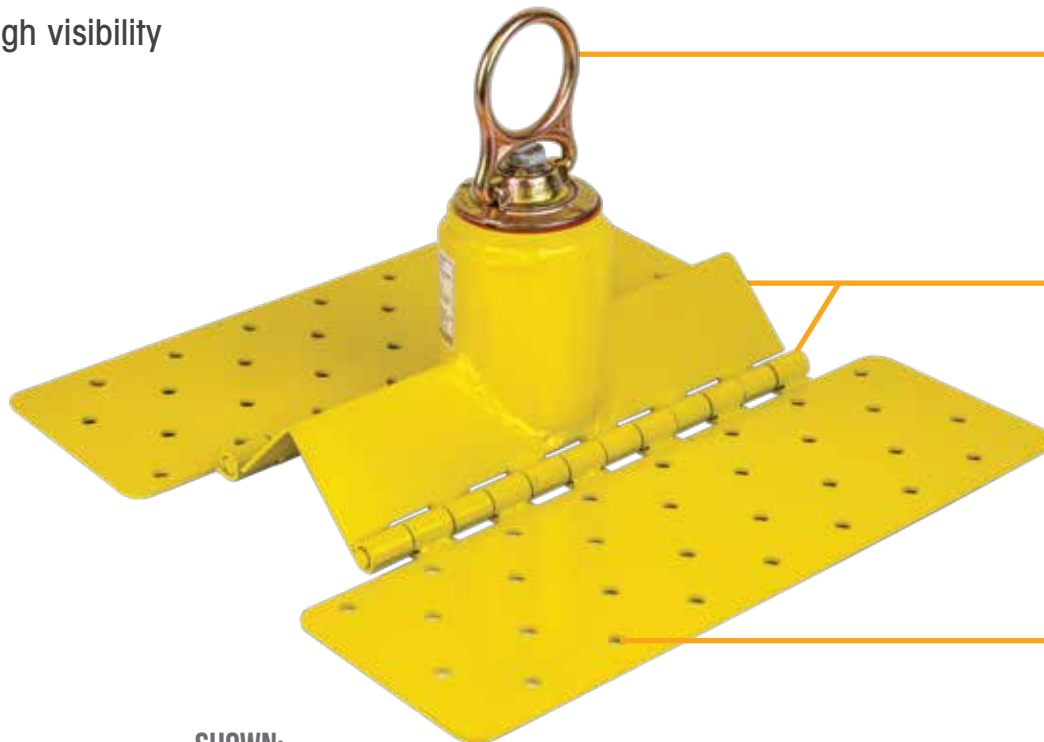

#### SWIVEL TOP

Rated for up to  
10,000 lbs.

#### ADJUSTABLE ROOF PITCH

Fits roof pitches  
from flat to sheer

#### FASTENER HOLES

Many holes available  
for installation to  
wood, metal or  
concrete

SHOWN:  
**PART #00342**

# SPECIFICATIONS

## STANDARDS:

OSHA 1926 Subpart M & 1910  
ANSI Z359.18-17 & A10.32-12  
Type A Anchorage Connector

## MATERIALS:

Powder-coated & Galvanized Steel

## WORKER CAPACITY:

130 - 420 lbs.

## PERFORMANCE:

- Maximum Users: 1
- 5,000 lb. MBS (Minimum Breaking Strength)

## NOTES:

- Minimum service temperature: -30°F
- Minimum substrate requirements:  
Wood: 3/4" CDX. Metal: 20 gauge.  
Concrete: 2,000 psi
- May be installed a maximum 16' apart, or a minimum 10' from leading edge

## PART #

00300

## DESCRIPTION

Powder-coated Steel Skyhook Anchor

### PRODUCT COMPLIANCE

### OSHA 1910 & OSHA 1926 SUBPART M

### ANSI Z359.18 & ANSI A10.32

Wood Installations

Yes

No

Metal Installations

Yes

No

Concrete Installations

Yes

Yes

# APPLICATIONS



## PERSONAL FALL ARREST:

- Skyhook anchors may be used in Personal Fall Arrest applications to support:
- Maximum 1 Personal Fall Arrest System (PFAS)
  - Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs.
  - Maximum allowable free fall is 6', unless used in combination with equipment explicitly certified for extended free fall.
  - Applicable D-rings: Dorsal.



## WORK POSITIONING:

- Skyhook anchors may be used in Work Positioning applications.
- Work Positioning systems allow a worker to be supported while in suspension and work freely with both hands.
  - Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs.
  - Maximum allowable free fall is 2'.
  - Applicable D-rings: Side & Shoulder.



## RESTRAINT:

- Skyhook anchors may be used in Restraint applications. Restraint systems:
- Prevent workers from reaching the leading edge of a fall hazard.
  - Always account for fully deployed length of SRL.
  - Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs.
  - No free fall is permitted.
  - May only be used on surfaces with slopes up to 4/12 (vertical/horizontal).
  - Applicable D-rings: Dorsal, Chest, Side, & Shoulder.



NEED MORE INFORMATION?

P: 1.800.466.6385 | VISIT OUR WEBSITE: [GUARDIANFALL.COM](http://GUARDIANFALL.COM)