

NON-SHOCK ABSORBING LANYARD


LANYARD

FEATURES & BENEFITS

- Conveniently extends the length of full-body harness dorsal D-ring, making it easier to attach to
- Extremely lightweight & easy to carry
- Loop end version also available (see Part #01122 below)



SHOWN:
PART #01122

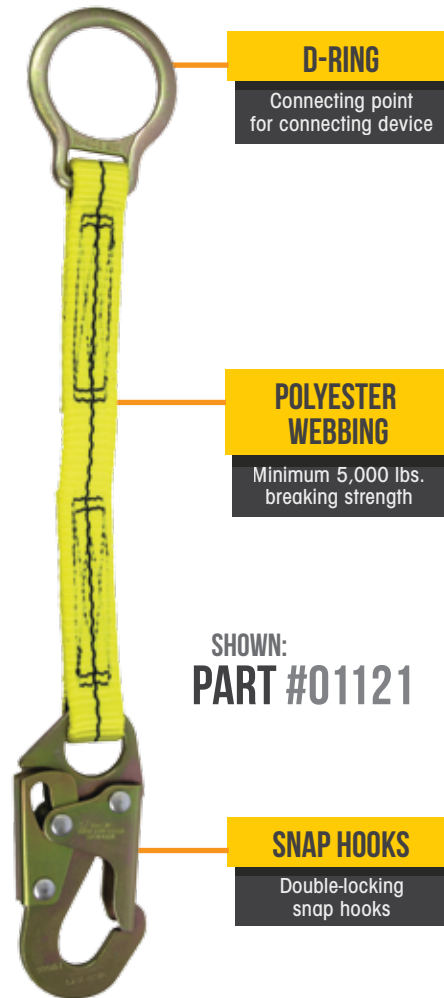

D-RING

Connecting point for connecting device

POLYESTER WEBBING

Minimum 5,000 lbs. breaking strength

SHOWN:
PART #01121

SNAP HOOKS

Double-locking snap hooks

SPECIFICATIONS

STANDARDS:

OSHA 1926 Subpart M & 1910
ANSI Z359.1-07 & A10.32-12

MATERIALS:

Polyester & Steel

WORKER CAPACITY:

130 - 310 lbs. or 130 - 420 lbs.
if used in combination with
equipment explicitly certified
for such use

NOTES:

- Always consider 18" additional fall clearance and free fall increase when this lanyard is in use
- Reminder: Non-shock absorbing lanyards are approved for Fall Restraint only. They may be paired with an approved shock absorber for Fall Arrest applications.

PART #	LENGTH	DESCRIPTION
01280	4' - 6'	Adjustable Non-Shock Absorbing Lanyard
01250	2'	Non-Shock Absorbing Lanyard - Single Leg
01255	3'	Non-Shock Absorbing Lanyard - Single Leg
01260	4'	Non-Shock Absorbing Lanyard - Single Leg
01265	6'	Non-Shock Absorbing Lanyard - Single Leg
01251	3'	Non-Shock Absorbing Lanyard - Single Leg w/ Rebar Hook
01261	4'	Non-Shock Absorbing Lanyard - Single Leg w/ Rebar Hook
01265	6'	Non-Shock Absorbing Lanyard - Single Leg w/ Rebar Hook
01270	4' - 6'	Non-Shock Absorbing Lanyard - Double Leg
01271	4' - 6'	Non-Shock Absorbing Lanyard - Double Leg w/Rebar Hooks
01289	6'	Non-Shock Absorbing Lanyard - w/ Adjustable D-ring & Rebar Hooks
01121	18"	Extension Lanyard w/ Snap Hook End
01122	18"	Extension Lanyard w/ Web Loop End

APPLICATIONS



PERSONAL FALL ARREST:

Non-Shock Absorbing Lanyards may be used in Personal Fall Arrest applications to support:

- Maximum 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs.
- Maximum permitted free fall is 6', or up to 12' if used in combination with equipment explicitly certified for such use.
- Applicable D-rings: Dorsal.



WORK POSITIONING:

Non-Shock Absorbing Lanyards may be used in Work Positioning applications.

- Work Positioning systems allow a worker to be supported while in suspension and work freely with both hands.
- Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs.
- Maximum allowable free fall is 2'.
- Applicable D-rings: Side & Shoulder.



RESTRAINT:

Non-Shock Absorbing Lanyards may be used in Restraint applications. Restraint systems:

- Prevent workers from reaching the leading edge of a fall hazard.
- Always account for fully deployed length of SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs.
- No free fall is permitted.
- May only be used on surfaces with slopes up to 4/12 (vertical/horizontal).
- Applicable D-rings: Dorsal, Chest, Side, & Shoulder.



RESCUE/CONFINED SPACE:

Non-Shock Absorbing Lanyards may be used in Rescue/Confined Space applications.

- Rescue systems function to safely recover a worker from a confined location or after exposed to a fall.
- Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs.
- No free fall is permitted.
- Applicable D-rings: Dorsal, Chest, & Shoulder.



NEED MORE INFORMATION?

P: 1.800.466.6385 | VISIT OUR WEBSITE: GUARDIANFALL.COM