



Technical Data Sheet

Revised 05/2022

LeatherWeld™ Repair Kit

PRODUCT BRIEF

J-B Weld® LeatherWeld™ Vinyl and Leather Repair Kit is an easy-to-use DIY repair product that does not require conventional heating irons or heating tools to fix torn or cracked vinyl or leather.



Part Number	Container Size
2130	3oz Repair Kit

PRODUCT BENEFITS

- No heat tools or heat cure required
- Mix to match any color

TYPICAL APPLICATIONS

- Tears, Rips, Cracks & Holes up to 2" Long or ½" wide
- Auto Seats, Car interior, Clothing, Furniture, Boats, Vinyl Floors

DIRECTIONS FOR USE

1. **PREPARE:** Clean the area to be repaired with a non-soapy cleaner. Make sure the area is completely dry.

2. **BACKING FABRIC:** If there is no backing or support under damage, cut the Backing Fabric slightly larger than the damaged area and insert it into and under the damage to provide support for adhesive.


3. **ADHESIVE:** For deep damage: Use the spatula to push the Vinyl Adhesive into the damaged area until both surfaces are even. For rips or tears: Use the spatula to apply the Vinyl Adhesive under both edges and center to hold backing fabric in place.

Allow adhesive to fully dry. This may take up to 24 hours. **NOTE:** Vinyl adhesive will shrink when dried, leaving a slight void. This will later be filled with the color repair compound.

4. **COLOR:** Using the mixing bottle and the color guide on this card, mix the 7 provided colors thoroughly with spatula to match the damaged material. Test mixture on Practice Vinyl before applying. Once matching color is achieved, apply to damaged area, ensuring an even finish.

5. **TEXTURE:** Place desired Grain Texture paper "This Side Up" over the repair application. Allow 24 hours, then slowly remove from repair area.

6. **FINISH:** If any areas appear still wet, re-apply texture paper and allow more drying time. If areas appear under-filled, add more color repair compound, cover again with grained paper and allow to dry. Repeat as necessary for best results. **NOTE:** Be sure to overlap and feather with color compound, but do not overfill.

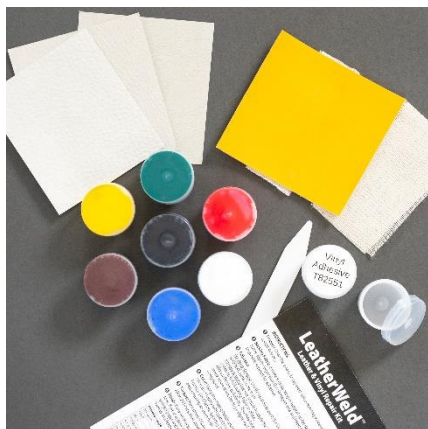

VOC STATUS:

Compliant for sale in all 50 states.