



WORLD'S STRONGEST BOND™

Technical Data Sheet

Revised 07/2021

FiberWeld™ Permanent Repair Cast

PRODUCT BRIEF

FiberWeld Permanent Repair Cast is a high-strength fiberglass wrap, impregnated with a specially-formulated resin. When activated by water, the product forms a strong, permanent bond that hardens like steel in 15 minutes.


Part Number	Container Size
38236	Carded 2 x 36 in. Repair Wrap Kit

PRODUCT BENEFITS

- Includes one 2 x 36 in. wrap, gloves, and securing bandage
- Easy to use like a cast: Wet, apply, done!
- Cures in 15 minutes
- Can be sanded and painted

TYPICAL APPLICATIONS

- Great for repairs & preventative reinforcement on metal, fiberglass, most plastics, wood and rubber
- Furniture, Tool handles, sporting goods, yard equipment, pipes & hoses, and more!

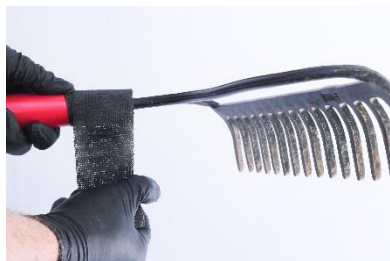

DIRECTIONS FOR USE

1. **PREPARE SURFACE:** Clear repair area of dirt, grease, oil, paint, rust, etc. For best results use a detergent or degreaser to clean the surface, then roughen surface with file or coarse sandpaper to provide the best repair.
2. **GLOVES:** Wear provided gloves.
3. **ACTIVATE:** Open pouch and submerge wrap in room temperature water for 5-120 seconds to activate resin.
4. **APPLY:** Wrap the damaged area as tightly as possible without slipping. Use entire roll, applying at least 5 layers over the break itself, and 2-4 inches of wrap support on both sides of the break.
5. **SECURE:** Apply included bandage strapping around wrap to secure in place. Remove bandage after 5-7 minutes.
6. **CURE:** Wait at least 15 minutes for product to cure before applying pressure to repaired area.

VOC STATUS:

Compliant for sale in all 50 states.

DISCLAIMER

**Not recommended for Polyethylene Plastic (PE), Polypropylene Plastic (PPE), Nylon, and other highly flexible materials and non-porous surfaces.*

The information and recommendations contained herein are based on our research and are believed to be accurate, but no warranty, express or implied, is made or should be inferred. Purchasers should test the products to determine acceptable quality and suitability for their own intended use.