


Concrete Inserts

Askew Head Bolt

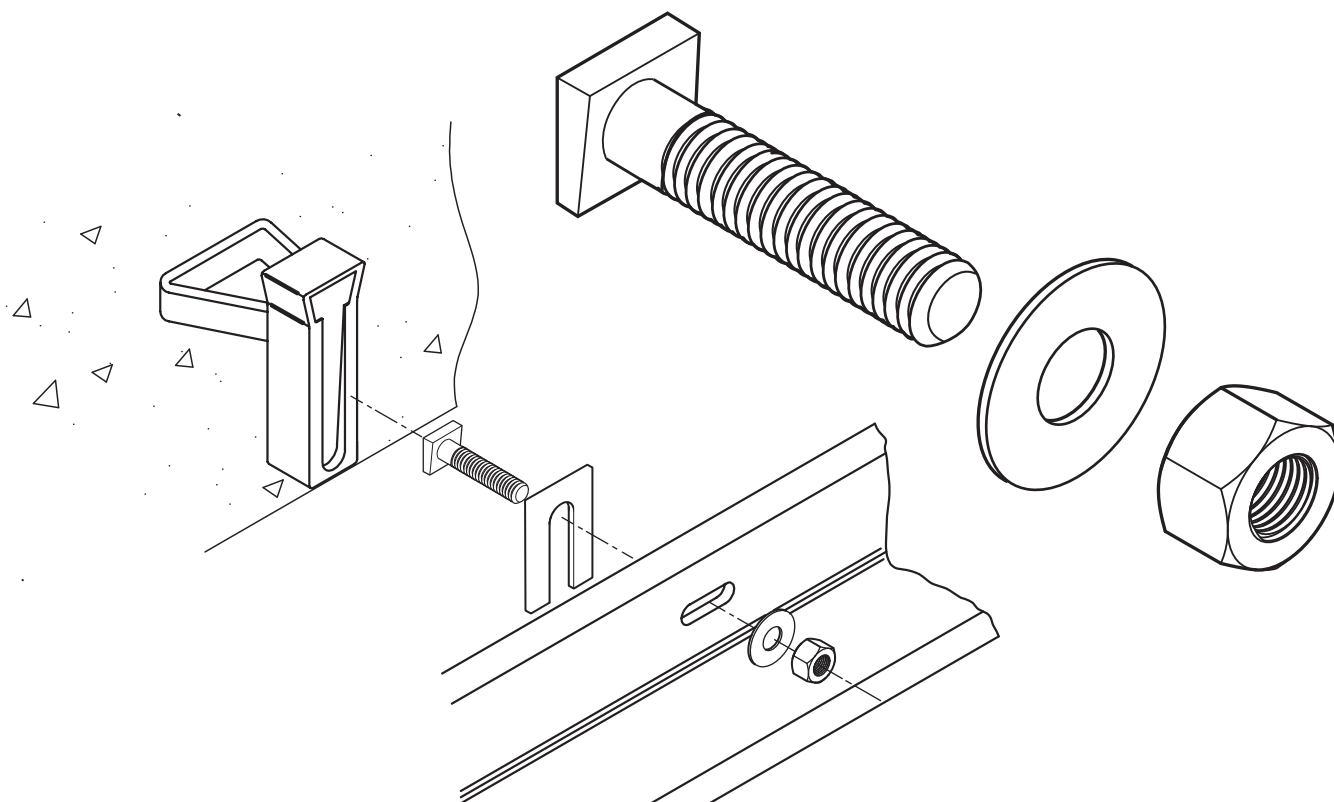

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

The beveled head of the askew head bolt engages the internal wedge shape of H&B concrete inserts (LW-340 or HW-340).

MATERIAL CONFORMANCE

Hot Dip Galvanized

ASTM A153/A153M, ASTM A123/A123M

Stainless Steel

Type 304: ASTM A276, ASTM A582/A582M

Type 316: ASTM A240/A240M, ASTM A582/A582M

PERFORMANCE DATA

Carbon Steel: 60,000 psi minimum tensile strength

Stainless Steel: 70,000 psi minimum tensile strength

Askew Head Bolt Finish:

☐ Hot-Dip Galvanized | Stainless Steel ☐ Type 304 ☐ Type 316

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

Askew Head Bolt Diameter:

☐ 3/4"

☐ 5/8" **NOTE:** the 5/8" bolt is only for restoration projects with existing 5/8" inserts, H&B's HW-340 & LW-340 inserts **ONLY** accept 3/4" bolts and are **NOT** compatible with a 5/8" askew bolt)

There are MINIMUM ORDER REQUIREMENTS for 5/8" bolts

Askew Head Bolt Length:

☐ 2"

☐ 2 1/2"

☐ 3"

☐ 4"

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.