


Adjustable Anchor System for Rubble Stone

Tie-HVR Anchor System Vertical J-Hook

J-Hook for all H&B Tie-HVR Rubble Stone Systems

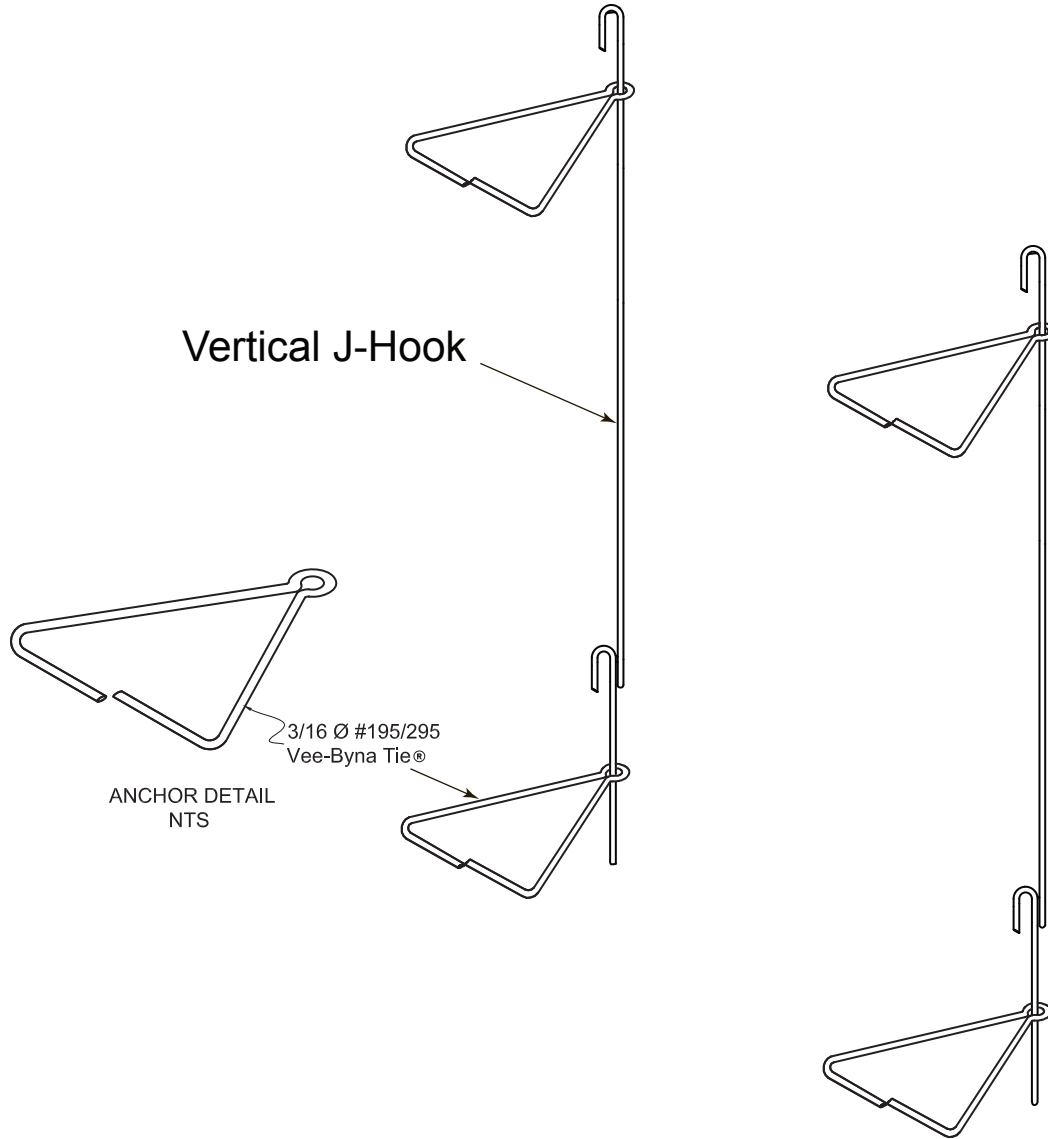

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Material Conformance - Joint Reinforcement

VERTICAL J-HOOK (Carbon Steel):
ASTM A36/A36M (Hot-Dip Galvanized **ASTM A153/A153M** Class B)
(Hot-Dip Galvanized available special order only)

VERTICAL J-HOOK (Stainless Steel):
ASTM A276 - AISI Type 304 or 316

U.S. Patent No. 8,904,725

H&B manufactures steel wire products from a minimum of 95% post-consumer recycled material.

Vertical J-Hook:

- ☐ 3/8"Ø ☐ 7/16"Ø
☐ 1/2"Ø

J-Hook Finish:

- ☐ Hot-Dip Galvanized*
☐ Stainless Steel - Type 304
☐ Stainless Steel - Type 316

* Hot-Dip Galvanized available special order only

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.