




LIGHT DUTY ELECTRO GALVANIZED & PLASTIC COATED

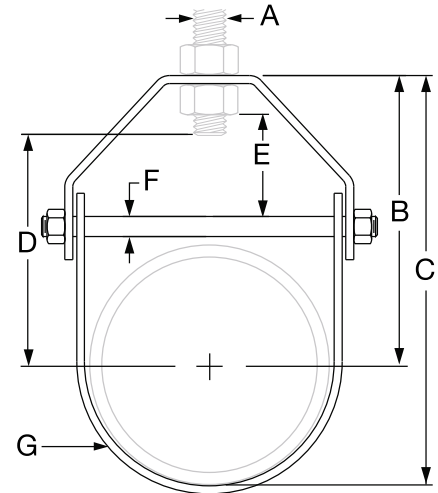

Allows vertical adjustment of pipe installation

- Maximum temperature 450° F
- Complies with Manufacturers Standardization Society (MSS) SP-69 Type 1, Federal Specification WW-H-171 Type 1
- In order to prevent failure due to disfiguring the U-strap a full width spacer on the cross bolt is recommended when using an oversized Clevis Hanger

Sizes: 1/2" - 4"

Material: Steel

Finish: Electro Galvanized & Plastic Coated

Approvals: Complies with MSS
SP-69 Type 1,
WW-H-171 Type 1

SIZE INCHES	ITEM ELECTRO GALVANIZED	ITEM PLASTIC COATED	MAX LOAD	WEIGHT	A ROD SIZE	B	C	D ROD OUT	E ADJUSTMENT	F	G WIDTH LOWER	INNER BOX	MASTER BOX	PALLET QTY
1/2"	HCL-GE12	HCL-P12	200	0.22	3/8	2-1/2	3-1/16	1-1/2	5/8	1/4	7/8	10	50	2400
3/4"	HCL-GE34	HCL-P34	200	0.23	3/8	2-11/16	3-1/4	1-5/16	5/8	1/4	7/8	10	50	2400
1"	HCL-GE01	HCL-P01	300	0.27	3/8	3-1/8	3-7/8	1-5/8	5/8	1/4	7/8	10	50	2400
1-1/4"	HCL-GE114	HCL-P114	300	0.29	3/8	3-1/4	4-1/8	1-11/16	5/8	1/4	7/8	10	50	2400
1-1/2"	HCL-GE112	HCL-P112	300	0.30	3/8	3-1/4	4-3/16	2-1/8	7/8	1/4	7/8	10	50	2400
2"	HCL-GE02	HCL-P02	300	0.39	3/8	3-11/16	4-15/16	2-5/8	1-1/8	1/4	1	10	50	2400
2-1/2"	HCL-GE212	HCL-P212	400	0.78	1/2	4-11/16	6-1/8	3-3/16	1-5/16	3/8	1	-	30	1440
3"	HCL-GE03	HCL-P03	400	0.72	1/2	4-15/16	6-5/8	4-1/16	1-5/8	3/8	1	-	25	1200
3-1/2"	HCL-GE312	HCL-P312	450	0.80	1/2	5-3/8	6-15/16	4-3/16	1-13/16	3/8	1	-	25	600
4"	HCL-GE04	HCL-P04	550	0.97	5/8	5-11/16	7-7/8	4-1/2	1-11/16	3/8	1-3/16	-	25	600