




STANDARD NO-HUB COUPLINGS

CERTIFIED TO ASTM C1277 & CISPI 310 STANDARDS

EVERCONNECT™ Standard No-Hub Couplings Can be used to assemble No-Hub Pipe and Fittings manufactured per ASTM A 888. The couplings consist of a gasket made of an elastomeric compound enclosed in a diamond pattern stainless steel shield. Depending on the size of the shield, two or four clamps are provided to give the required sealing force to the shield to seal the gasket on the pipes and fittings.

Specifications:

- 304 Series stainless steel bands attach to diamond pattern stainless steel shield over molded one-piece elastomer sealing gasket
- Provides the perfect fit for joining hub-less cast iron soil pipe and fittings in drain waste & vent applications
- Longer slots on clamping band to provide greater adaptability to varying cast iron pipe diameters
- Lightweight and easy to install, by tightening worm screw to 60 inch lbs. torque
- Conforms to ASTM C 1277
- Meets or exceeds all CISPI 310 specifications
- High quality elastomeric compound gasket conforming to standard ASTM C 564
- IAPMO and CSA certification

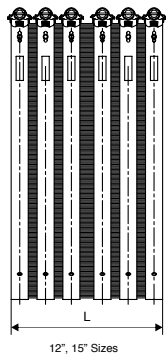

Dimensions

Part#	Size	Shield Width	Installation Torque	Clamps
14112	1-1/2"	2-1/8"	60	2
14200	2"	2-1/8"	60	2
14300	3"	2-1/8"	60	2
14400	4"	2-1/8"	60	2
14500	5"	3"	60	4
14600	6"	3"	60	4
14800	8"	4"	60	4
1410	10"	4"	60	4
1412	12"	5.43"	60	6
1415	15"	5.43"	60	6
14212	1-1/2" x 2"	2-1/8"	60	2
1432	2" x 3"	2-1/8"	60	2
1442	4" x 2"	2-1/8"	60	2
1443	4" x 3"	2-1/8"	60	2

Material Specifications

Part Name	Material
Band	SS304 stainless steel
Screw	5/16" hex head made of SS304 stainless steel
Housing	SS304 stainless steel
Shield	0.007" thick diamond design SS301 stainless steel
Gasket	Elastomeric compound conforming to ASTM C564

Engineer's Approval

Job # _____

Arch/Eng. _____

Contractor _____