



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300



Photometric Test Report

Relevant Standards
IES LM-79-2008, ANSI C82.77-2002

Prepared For
Auroralight Inc
2742 Loker Ave W
#100
Carlsbad, CA 92010-6619
United States

Catalog Number
LDM250-180-40 (180° OPENING, 4000K)
Order Number
11263738
Test Number
1256647E2A

Revision of Test Number 1256647E2 on:

2021-06-28
Test Date

2019-03-22

Prepared By

Derek Smarr, Technician

Approved By

Alexa Lambert, Project Handler

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.
This report must not be used by the client to claim product certification, approval, or endorsement by
NVLAP, NIST, or any agency of the Federal Government.



Luminaire Description: Cylindrical copper housing, brass domed top with two (2) 90° openings. This report has been pro-rated using data from test number 11263738-1256647 and data from Auroralight Inc to account for difference in color temperature.

Lamp: One (1) Cree XP-L 3000K LED

Mounting: Recessed In-Grade/Wall

Luminaire



Luminaire Characteristics

Luminous Diameter: 3.00 in.
Luminous Height: 0.250 in.

Summary of Results

Roadway Classification: Type I, Very Long
Cutoff Classification: Noncutoff
BUG Rating: B0 U1 G0

Test Conditions

Test Temperature: 25.3 °C
Voltage: 12.01 VAC
Current: 0.4164 A
Power: 3.095 W
Power Factor: 0.619
Frequency: 60 Hz
Current THD: 95.1 %

Tested in 30 planes left side, 30 planes right side, left and right averaged
Vertical test increments are 2.5 degrees
Test distance exceeds five times the greatest luminous opening of luminaire

Laboratory results may not be representative of field performance
Ballast factors have not been applied



Distribution - Goniophotometer

Distribution Test Conditions

| Temperature | Voltage | Current | Power | Power Factor | Frequency | Current THD |
|-------------|-----------|----------|---------|--------------|-----------|-------------|
| 25.3 °C | 12.01 VAC | 0.4164 A | 3.095 W | 0.619 | 60 Hz | 95.1 % |

Summary of Results

Spacing Criteria

0-180: 4.50

90-270: 3.39

Total Lumen Output:

42.52 Lumens


Luminaire Efficacy:

13.7 lm/w

Maximum Candela:

25 Candela

Polar Plot

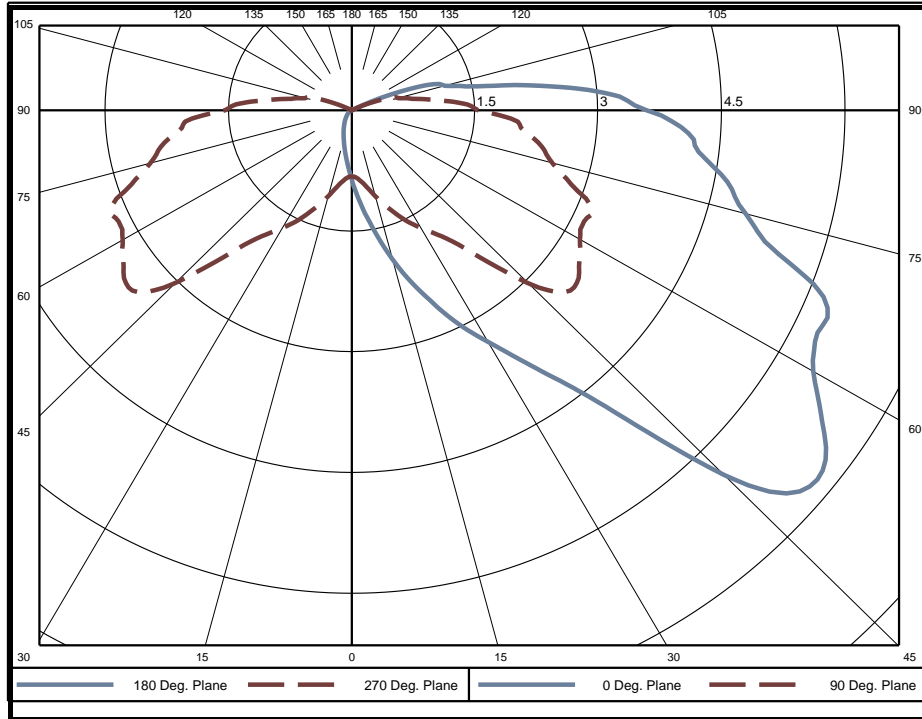

Zonal Lumen Summary

| Zone | Lumens | % of Luminaire | Zone | Lumens | % of Luminaire | Zone | Lumens | % of Luminaire |
|-------|--------|----------------|---------|--------|----------------|---------|--------|----------------|
| 0-5 | 0.021 | 0.0% | 60-65 | 2.762 | 6.5% | 120-125 | 0.004 | 0.0% |
| 5-10 | 0.066 | 0.2% | 65-70 | 3.269 | 7.7% | 125-130 | 0.003 | 0.0% |
| 10-15 | 0.125 | 0.3% | 70-75 | 4.559 | 10.7% | 130-135 | 0.002 | 0.0% |
| 15-20 | 0.204 | 0.5% | 75-80 | 4.972 | 11.7% | 135-140 | 0.002 | 0.0% |
| 20-25 | 0.304 | 0.7% | 80-85 | 5.011 | 11.8% | 140-145 | 0.001 | 0.0% |
| 25-30 | 0.430 | 1.0% | 85-90 | 4.885 | 11.5% | 145-150 | 0.001 | 0.0% |
| 30-35 | 0.583 | 1.4% | 90-95 | 4.269 | 10.0% | 150-155 | 0.001 | 0.0% |
| 35-40 | 0.818 | 1.9% | 95-100 | 1.626 | 3.8% | 155-160 | 0.001 | 0.0% |
| 40-45 | 1.238 | 2.9% | 100-105 | 0.638 | 1.5% | 160-165 | 0.000 | 0.0% |
| 45-50 | 1.702 | 4.0% | 105-110 | 0.436 | 1.0% | 165-170 | 0.000 | 0.0% |
| 50-55 | 2.005 | 4.7% | 110-115 | 0.220 | 0.5% | 170-175 | 0.000 | 0.0% |
| 55-60 | 2.342 | 5.5% | 115-120 | 0.024 | 0.1% | 175-180 | 0.000 | 0.0% |

| Zone | Lumens | % of Luminaire |
|--------|--------|----------------|
| 0-40 | 3 | 6.0% |
| 0-60 | 10 | 23.1% |
| 0-90 | 35 | 83.0% |
| 90-180 | 7 | 17.0% |



Candela Tabulation
Horizontal Angle (Degrees)

| Vertical Angle (Degrees) | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 |
|--------------------------|-----|------|-------|-------|-------|-------|------|-------|------|-------|------|-------|------|-------|-------|-------|
| | 0 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 | 0.85 |
| | 5 | 1.15 | 1.12 | 1.05 | 0.95 | 0.85 | 0.76 | 0.70 | 0.66 | 0.64 | 0.66 | 0.70 | 0.76 | 0.85 | 0.95 | 1.05 |
| | 10 | 1.49 | 1.46 | 1.34 | 1.15 | 0.95 | 0.76 | 0.61 | 0.51 | 0.49 | 0.51 | 0.61 | 0.76 | 0.95 | 1.15 | 1.34 |
| | 15 | 1.92 | 1.88 | 1.72 | 1.43 | 1.11 | 0.80 | 0.56 | 0.42 | 0.37 | 0.42 | 0.56 | 0.80 | 1.11 | 1.43 | 1.72 |
| | 20 | 2.37 | 2.36 | 2.18 | 1.77 | 1.29 | 0.85 | 0.54 | 0.34 | 0.29 | 0.34 | 0.54 | 0.85 | 1.29 | 1.77 | 2.18 |
| | 25 | 2.85 | 2.89 | 2.73 | 2.16 | 1.49 | 0.92 | 0.52 | 0.29 | 0.22 | 0.29 | 0.52 | 0.92 | 1.49 | 2.16 | 2.73 |
| | 30 | 3.33 | 3.47 | 3.35 | 2.59 | 1.69 | 0.98 | 0.51 | 0.24 | 0.17 | 0.24 | 0.51 | 0.98 | 1.69 | 2.59 | 3.35 |
| | 35 | 3.92 | 4.18 | 4.20 | 3.20 | 1.91 | 1.03 | 0.49 | 0.21 | 0.13 | 0.21 | 0.49 | 1.03 | 1.91 | 3.20 | 4.20 |
| | 40 | 4.81 | 5.59 | 5.94 | 4.57 | 2.34 | 1.06 | 0.47 | 0.18 | 0.10 | 0.18 | 0.47 | 1.06 | 2.34 | 4.57 | 5.59 |
| | 45 | 6.41 | 7.54 | 8.67 | 6.64 | 3.04 | 1.11 | 0.44 | 0.14 | 0.08 | 0.14 | 0.44 | 1.11 | 3.04 | 6.64 | 8.67 |
| | 50 | 7.27 | 8.64 | 10.22 | 7.82 | 3.49 | 1.19 | 0.41 | 0.12 | 0.06 | 0.12 | 0.41 | 1.19 | 3.49 | 7.82 | 10.22 |
| | 55 | 7.02 | 9.53 | 11.35 | 9.25 | 3.39 | 1.21 | 0.36 | 0.09 | 0.04 | 0.09 | 0.36 | 1.21 | 3.39 | 9.25 | 11.35 |
| | 60 | 6.48 | 10.94 | 13.00 | 10.80 | 3.22 | 1.06 | 0.30 | 0.07 | 0.03 | 0.07 | 0.30 | 1.06 | 3.22 | 10.80 | 13.00 |
| | 65 | 6.32 | 12.45 | 15.07 | 12.98 | 3.17 | 0.85 | 0.24 | 0.05 | 0.02 | 0.05 | 0.24 | 0.85 | 3.17 | 12.98 | 15.07 |
| | 70 | 5.75 | 15.85 | 18.84 | 16.85 | 2.93 | 0.66 | 0.18 | 0.03 | 0.01 | 0.03 | 0.18 | 0.66 | 2.93 | 16.85 | 18.84 |
| | 75 | 4.96 | 20.55 | 24.80 | 21.97 | 2.54 | 0.50 | 0.12 | 0.02 | 0.01 | 0.02 | 0.12 | 0.50 | 2.54 | 21.97 | 24.80 |
| | 80 | 4.56 | 21.52 | 24.93 | 22.89 | 2.31 | 0.36 | 0.07 | 0.02 | 0.01 | 0.02 | 0.07 | 0.36 | 2.31 | 22.89 | 24.93 |
| | 85 | 4.18 | 19.42 | 24.21 | 24.51 | 2.06 | 0.24 | 0.04 | 0.02 | 0.01 | 0.02 | 0.04 | 0.24 | 2.06 | 24.51 | 24.21 |
| | 90 | 3.59 | 18.04 | 22.11 | 23.25 | 1.54 | 0.12 | 0.02 | 0.02 | 0.01 | 0.02 | 0.02 | 0.12 | 1.54 | 23.25 | 22.11 |
| | 95 | 2.89 | 16.29 | 17.94 | 16.50 | 1.24 | 0.13 | 0.03 | 0.02 | 0.02 | 0.02 | 0.03 | 0.13 | 1.24 | 16.50 | 17.94 |
| | 100 | 1.75 | 3.67 | 4.05 | 3.37 | 0.81 | 0.13 | 0.02 | 0.02 | 0.02 | 0.02 | 0.13 | 0.81 | 3.37 | 4.05 | 3.67 |
| | 105 | 1.17 | 1.94 | 2.13 | 1.89 | 0.58 | 0.10 | 0.02 | 0.02 | 0.02 | 0.02 | 0.10 | 0.58 | 1.89 | 2.13 | 1.94 |
| | 110 | 0.83 | 1.56 | 1.57 | 1.49 | 0.39 | 0.04 | 0.02 | 0.02 | 0.02 | 0.02 | 0.04 | 0.39 | 1.49 | 1.57 | 1.56 |
| | 115 | 0.19 | 0.41 | 0.42 | 0.39 | 0.09 | 0.02 | 0.02 | 0.01 | 0.01 | 0.01 | 0.02 | 0.09 | 0.39 | 0.42 | 0.41 |
| | 120 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 |
| | 125 | 0.01 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.00 |
| | 130 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 |
| | 135 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 |
| | 140 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 145 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 150 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 155 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 160 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.00 | 0.00 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 165 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 170 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 175 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 180 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

Average Luminance (cd/m²)
Horizontal Angle (Degrees)

| Vertical Angle (Degrees) | 0 | 45 | 90 |
|--------------------------|----|-------|------|
| | 0 | 186 | 186 |
| | 45 | 1989 | 942 |
| | 55 | 2684 | 1295 |
| | 65 | 3281 | 1643 |
| | 75 | 4203 | 2148 |
| | 85 | 10510 | 5181 |



Utilization of Lumens - Zonal Cavity Method

| Effective Floor Cavity Reflectance 20% | | | | | | | | | | | | | | | | | | |
|--|--|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Ceiling Cavity Reflectance | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 |
| Wall Reflectance | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| Room Cavity Ratio (RCR) | ** Values are expressed as Lumens delivered to the task surface ** | | | | | | | | | | | | | | | | | |
| 0 | 49 | 49 | 49 | 49 | 47 | 47 | 47 | 47 | 43 | 43 | 43 | 40 | 40 | 40 | 37 | 37 | 37 | 35 |
| 1 | 40 | 35 | 32 | 28 | 37 | 34 | 30 | 27 | 30 | 28 | 25 | 27 | 25 | 23 | 24 | 23 | 21 | 19 |
| 2 | 34 | 28 | 23 | 19 | 32 | 27 | 22 | 19 | 24 | 20 | 17 | 21 | 18 | 15 | 19 | 16 | 14 | 12 |
| 3 | 30 | 23 | 18 | 14 | 28 | 22 | 17 | 14 | 20 | 16 | 12 | 17 | 14 | 11 | 15 | 12 | 10 | 8 |
| 4 | 27 | 20 | 15 | 11 | 25 | 19 | 14 | 10 | 17 | 13 | 9 | 15 | 11 | 8 | 13 | 10 | 7 | 6 |
| 5 | 24 | 17 | 12 | 9 | 23 | 16 | 12 | 8 | 15 | 11 | 7 | 13 | 9 | 7 | 11 | 8 | 6 | 5 |
| 6 | 22 | 15 | 11 | 7 | 21 | 14 | 10 | 7 | 13 | 9 | 6 | 11 | 8 | 5 | 10 | 7 | 5 | 4 |
| 7 | 21 | 14 | 9 | 6 | 19 | 13 | 9 | 6 | 11 | 8 | 5 | 10 | 7 | 4 | 9 | 6 | 4 | 3 |
| 8 | 19 | 12 | 8 | 5 | 18 | 12 | 8 | 5 | 10 | 7 | 4 | 9 | 6 | 4 | 8 | 5 | 3 | 2 |
| 9 | 18 | 11 | 7 | 4 | 17 | 11 | 7 | 4 | 9 | 6 | 4 | 8 | 5 | 3 | 8 | 5 | 3 | 2 |
| 10 | 17 | 10 | 6 | 4 | 16 | 10 | 6 | 4 | 9 | 5 | 3 | 8 | 5 | 3 | 7 | 4 | 3 | 2 |


| Beam and Field Information | |
|----------------------------|---------------|
| CIE Type: | Semi-Direct |
| Center Beam Intensity: | 0.85 Candela |
| Central Cone Intensity: | 1 Candela |
| Beam Flux: | 42.2 Lumens |
| Beam Angle (0-180): | 125.7 Degrees |
| Beam Angle (90-270): | 219.0 Degrees |
| Field Angle (0-180): | 158.9 Degrees |
| Field Angle (90-270): | 230.0 Degrees |

| Cone of Light Tabulation | | | |
|--------------------------|--|----------------------|-----------------|
| Mounting Height (Feet) | | Footcandles at Nadir | Diameter (Feet) |
| 4.00 | | 0.0530 | 17.8 |
| 6.00 | | 0.0235 | 26.7 |
| 8.00 | | 0.0132 | 35.7 |
| 10.0 | | 0.00847 | 44.6 |
| 12.0 | | 0.00588 | 53.5 |
| 14.0 | | 0.00432 | 62.4 |
| 16.0 | | 0.00331 | 71.3 |



ISOFootcandle Plot

Mounting Height - 2 Feet

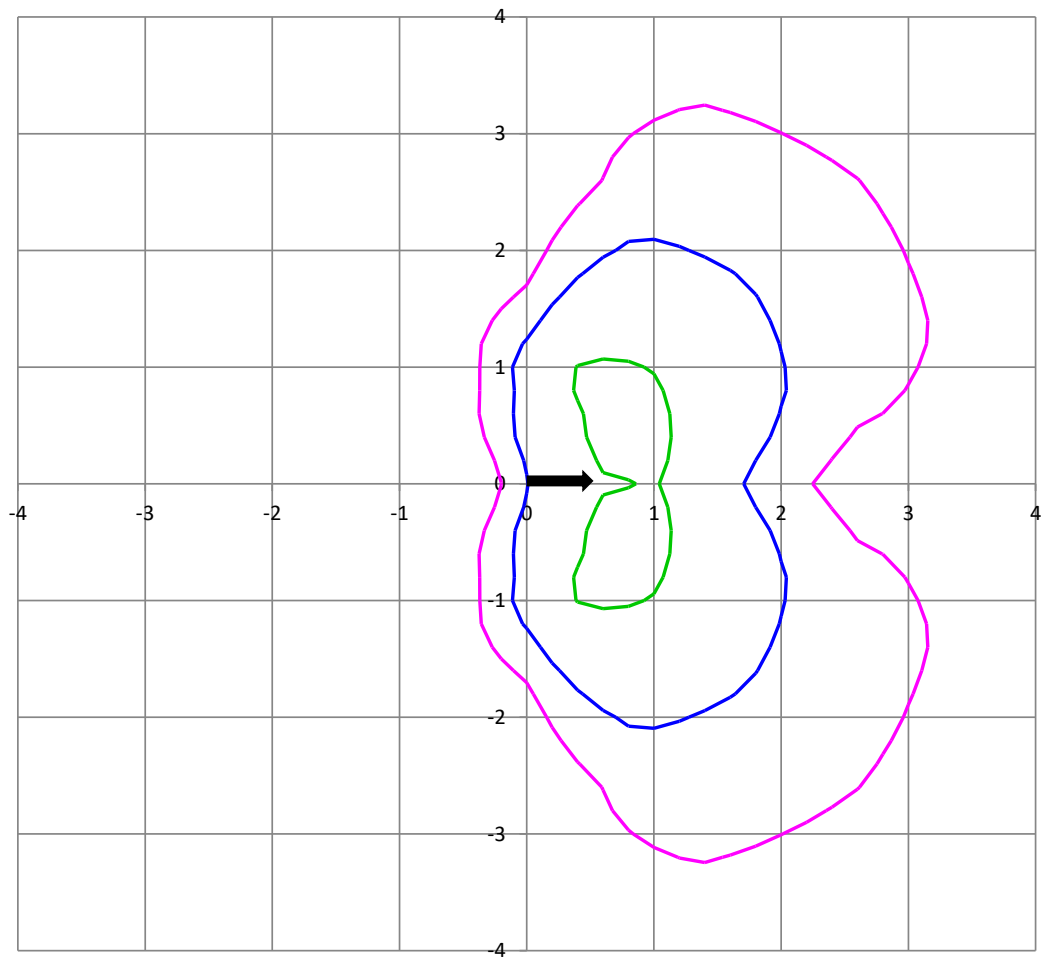


Grid Lines in Units of Mounting Height

5fc 2fc 1fc 0.5fc 0.2fc 0.1fc



IES "BUG" Rating
(Back Light, Uplight, Glare)
Per IES TM-15-11

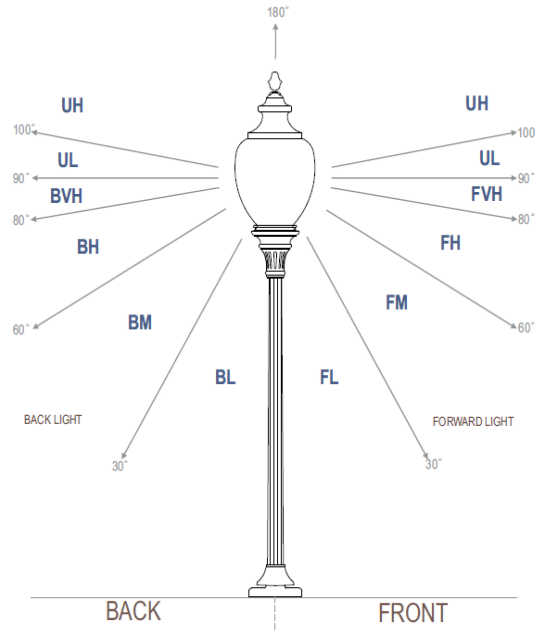

Luminaire Classification System (LCS)

| LCS | Zone | Lumens | Luminaire % |
|-------------------|-----------------|--------|-------------|
| FL | (0-30) | 0.9 | 2.1% |
| FM | (30-60) | 7.8 | 18.3% |
| FH | (60-80) | 15.1 | 35.3% |
| FVH | (80-90) | 9.8 | 22.9% |
| BL | (0-30) | 0.3 | 0.6% |
| BM | (30-60) | 0.8 | 2.0% |
| BH | (60-80) | 0.5 | 1.2% |
| BVH | (80-90) | 0.1 | 0.3% |
| UL | (90-100) | 6.1 | 14.2% |
| UH | (100-180) | 1.3 | 3.1% |
| Total | | 42.8 | 100.0% |
| BUG Rating | B0 U1 G0 | | |



Attachment A

Amended Report Documentation

[illegible]