

# KUZCO LIGHTING | LED

**Filename:** MP14924-BK - Chute

**Manufacturer:** Kuzco Lighting

**Luminaire Cat:** MP14924-WH

**Lamp:** LED/ w DRIVER

**Lamp Cat:** UNKNOWN

**Ballast Desc:** [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1800mA (const)] | [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1500mA (const)]

**Ballast Cat:** [DR-CC-80-42] | [DR-CC-60-42]

**Lamp Output:** Total luminaire Lumens: 5220.4

**Max Candela:** 582.9 at Horizontal: 157.5°, Vertical: 90°

**Input Wattage:** 135


**Luminous Opening:** Vertical Cylinder (Dia : 25.56", H: 35.04")

**Test Lab:** Kuzco Lighting

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

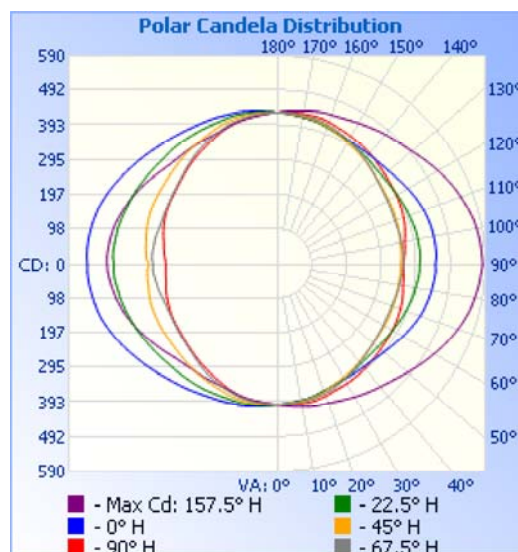


## Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	334.2	6.4%
0-40	580.6	11.1%
0-60	1,244.3	23.8%
60-90	1,321.8	25.3%
70-100	1,385.6	26.5%
90-120	1,345.7	25.8%
0-90	2,566.1	49.2%
90-180	2,654.3	50.8%
0-180	5,220.4	100%

## Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	38.3	0.7%	90-100	471.7	9%
10-20	113.4	2.2%	100-110	454.1	8.7%
20-30	182.5	3.5%	110-120	420.0	8%
30-40	246.4	4.7%	120-130	373.0	7.1%
40-50	304.6	5.8%	130-140	319.4	6.1%
50-60	359.1	6.9%	140-150	260.4	5%
60-70	407.8	7.8%	150-160	194.1	3.7%
70-80	445.8	8.5%	160-170	120.8	2.3%
80-90	468.1	9.0%	170-180	40.9	0.8%

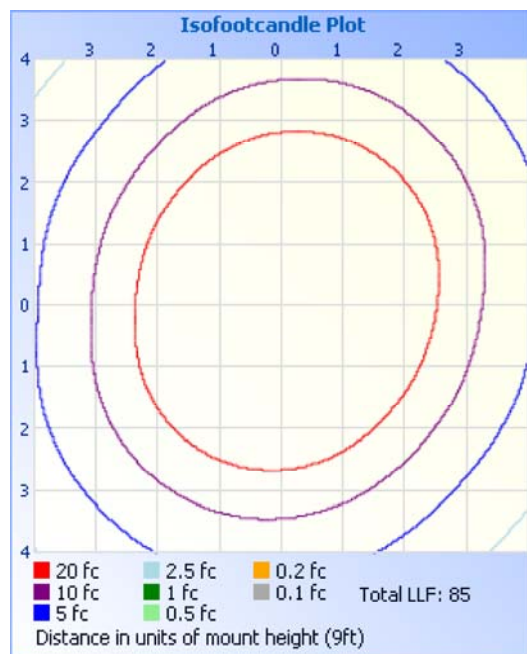

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	178 fc	
3.0ft	44.6 fc	
4.5ft	19.8 fc	
6.0ft	11.1 fc	
7.5ft	7.13 fc	
9.0ft	4.95 fc	