



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300



Photometric Test Report

Relevant Standards
IES LM-79-2008, ANSI C82.77-2002

Prepared For
Auroralight Inc

2742 Loker Ave W
#100
Carlsbad, CA 92010-6619
United States

Catalog Number
HDL11-AC6-6-M-30 (6W, 25° OPTIC, 3000K)

Order Number
12250114
Test Number
12250114.133

Test Date

2018-05-04

Prepared By

Cordaryl Cousar, Technician

Approved By

Alexa Lambert, Project Handler

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.
This report must not be used by the client to claim product certification, approval, or endorsement by
NVLAP, NIST, or any agency of the Federal Government.



Luminaire Description: Cylindrical metal housing with acrylic tube, lens and internal LED module
Lamp: One (1) Cree XHP 3000K LED with 25°, medium silicone optic
Mounting: Pendant
Ballast/Driver: Integrated

Luminaire



Luminaire Characteristics

Luminous Diameter: 2.00 in.
Luminous Height: 6.250 in.

Summary of Results

Roadway Classification: Type V, Very Short
Cutoff Classification: Noncutoff
BUG Rating: B0 U3 G1

Test Conditions

Test Temperature: 24.2 °C
Voltage: 12.03 VAC
Current: 0.5191 A
Power: 6.177 W
Power Factor: 0.989
Frequency: 60 Hz
Current THD: 8.14 %

Tested in 30 planes left side, 30 planes right side, left and right averaged
Vertical test increments are 2.5 degrees
Test distance exceeds five times the greatest luminous opening of luminaire

Laboratory results may not be representative of field performance
Ballast factors have not been applied



Distribution - Goniophotometer

Distribution Test Conditions

| Temperature | Voltage | Current | Power | Power Factor | Frequency | Current THD |
|-------------|-----------|----------|---------|--------------|-----------|-------------|
| 24.2 °C | 12.03 VAC | 0.5191 A | 6.177 W | 0.989 | 60 Hz | 8.14 % |

Summary of Results

Spacing Criteria

0-180: 1.64

90-270: 1.64

Total Lumen Output:

350.6 Lumens


Luminaire Efficacy:

56.8 lm/w

Maximum Candela:

41 Candela

Polar Plot

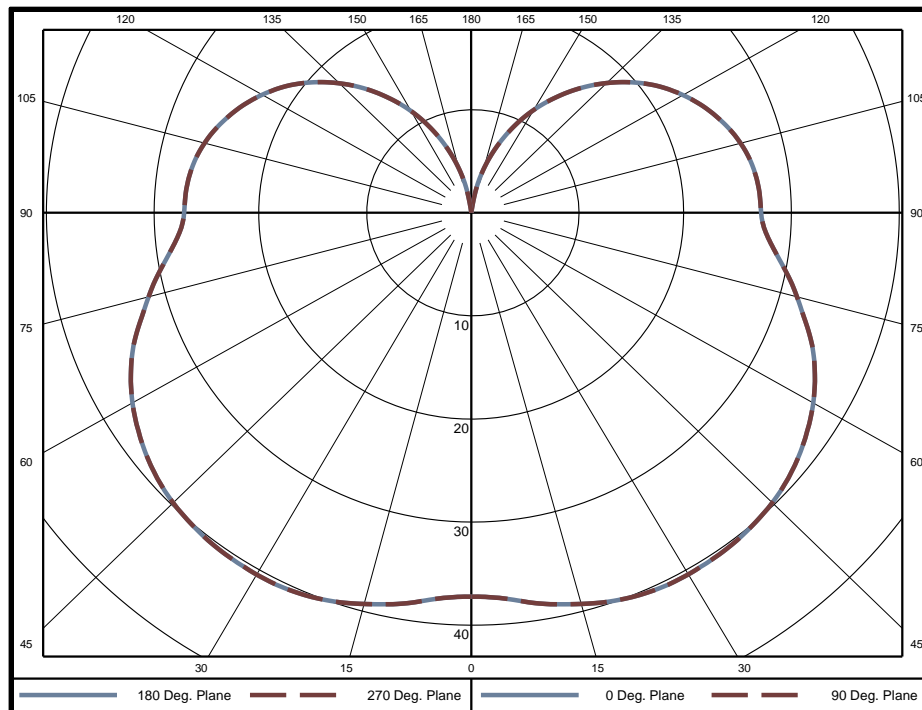

Zonal Lumen Summary

| Zone | Lumens | % of Luminaire | Zone | Lumens | % of Luminaire | Zone | Lumens | % of Luminaire |
|-------|--------|----------------|---------|--------|----------------|---------|--------|----------------|
| 0-5 | 0.89 | 0.3% | 60-65 | 17.58 | 5.0% | 120-125 | 10.23 | 2.9% |
| 5-10 | 2.73 | 0.8% | 65-70 | 17.47 | 5.0% | 125-130 | 8.94 | 2.5% |
| 10-15 | 4.62 | 1.3% | 70-75 | 16.98 | 4.8% | 130-135 | 7.58 | 2.2% |
| 15-20 | 6.54 | 1.9% | 75-80 | 16.34 | 4.7% | 135-140 | 6.22 | 1.8% |
| 20-25 | 8.44 | 2.4% | 80-85 | 15.57 | 4.4% | 140-145 | 4.91 | 1.4% |
| 25-30 | 10.24 | 2.9% | 85-90 | 14.98 | 4.3% | 145-150 | 3.70 | 1.1% |
| 30-35 | 11.92 | 3.4% | 90-95 | 14.80 | 4.2% | 150-155 | 2.61 | 0.7% |
| 35-40 | 13.46 | 3.8% | 95-100 | 14.58 | 4.2% | 155-160 | 1.66 | 0.5% |
| 40-45 | 14.81 | 4.2% | 100-105 | 14.12 | 4.0% | 160-165 | 0.92 | 0.3% |
| 45-50 | 15.94 | 4.5% | 105-110 | 13.41 | 3.8% | 165-170 | 0.37 | 0.1% |
| 50-55 | 16.78 | 4.8% | 110-115 | 12.49 | 3.6% | 170-175 | 0.04 | 0.0% |
| 55-60 | 17.34 | 4.9% | 115-120 | 11.43 | 3.3% | 175-180 | 0 | 0.0% |

| Zone | Lumens | % of Luminaire |
|--------|--------|----------------|
| 0-40 | 59 | 16.8% |
| 0-60 | 124 | 35.3% |
| 0-90 | 223 | 63.5% |
| 90-180 | 128 | 36.5% |



Candela Tabulation

Horizontal Angle (Degrees)

| Vertical Angle (Degrees) | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 |
|--------------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 0 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 | 37.23 |
| | 5 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 | 37.57 |
| | 10 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 | 38.50 |
| | 15 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 | 39.27 |
| | 20 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 | 39.98 |
| | 25 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 | 40.39 |
| | 30 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 | 40.51 |
| | 35 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 | 40.43 |
| | 40 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 | 40.18 |
| | 45 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 | 39.77 |
| | 50 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 | 39.06 |
| | 55 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 | 38.09 |
| | 60 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 | 36.89 |
| | 65 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 | 35.39 |
| | 70 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 | 33.53 |
| | 75 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 | 31.50 |
| | 80 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 | 29.56 |
| | 85 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 | 27.84 |
| | 90 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 | 27.08 |
| | 95 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 | 26.97 |
| | 100 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 | 26.65 |
| | 105 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 | 26.05 |
| | 110 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 | 25.19 |
| | 115 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 | 24.12 |
| | 120 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 | 22.84 |
| | 125 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 | 21.39 |
| | 130 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 | 19.68 |
| | 135 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 | 17.79 |
| | 140 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 | 15.76 |
| | 145 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 | 13.61 |
| | 150 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 | 11.42 |
| | 155 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 | 9.08 |
| | 160 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 | 6.70 |
| | 165 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 | 4.31 |
| | 170 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 | 1.63 |
| | 175 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 180 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

Average Luminance (cd/m²)

Horizontal Angle (Degrees)


| Vertical Angle (Degrees) | 0 | 45 | 90 |
|--------------------------|----|-------|-------|
| | 0 | 18370 | 18370 |
| | 45 | 5558 | 5558 |
| | 55 | 4887 | 4887 |
| | 65 | 4320 | 4320 |
| | 75 | 3776 | 3776 |
| | 85 | 3375 | 3375 |



Utilization of Lumens - Zonal Cavity Method

| Effective Floor Cavity Reflectance 20% | | | | | | | | | | | | | | | | | | |
|--|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Ceiling Cavity Reflectance | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 |
| Wall Reflectance | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| Room Cavity Ratio (RCR) | ** Values are expressed as Lumens delivered to the task surface ** | | | | | | | | | | | | | | | | | |
| 0 | 387 | 387 | 387 | 387 | 363 | 363 | 363 | 363 | 318 | 318 | 318 | 278 | 278 | 278 | 240 | 240 | 240 | 223 |
| 1 | 338 | 317 | 297 | 279 | 315 | 296 | 278 | 263 | 257 | 243 | 231 | 222 | 211 | 201 | 189 | 181 | 173 | 157 |
| 2 | 302 | 268 | 240 | 216 | 280 | 250 | 225 | 204 | 217 | 197 | 180 | 186 | 170 | 157 | 158 | 145 | 135 | 120 |
| 3 | 272 | 231 | 199 | 173 | 252 | 215 | 187 | 164 | 187 | 163 | 144 | 160 | 141 | 126 | 135 | 120 | 108 | 94 |
| 4 | 247 | 201 | 168 | 143 | 229 | 188 | 158 | 135 | 163 | 138 | 119 | 140 | 120 | 104 | 118 | 102 | 89 | 77 |
| 5 | 225 | 178 | 144 | 120 | 209 | 166 | 136 | 113 | 144 | 119 | 100 | 124 | 103 | 87 | 104 | 88 | 75 | 64 |
| 6 | 207 | 158 | 125 | 102 | 192 | 148 | 118 | 96 | 129 | 104 | 86 | 111 | 90 | 75 | 94 | 77 | 64 | 54 |
| 7 | 191 | 142 | 110 | 88 | 177 | 133 | 104 | 83 | 116 | 92 | 74 | 100 | 80 | 65 | 85 | 68 | 56 | 47 |
| 8 | 177 | 128 | 98 | 77 | 164 | 120 | 92 | 73 | 105 | 82 | 65 | 91 | 71 | 57 | 77 | 61 | 49 | 41 |
| 9 | 164 | 117 | 87 | 68 | 153 | 110 | 83 | 64 | 96 | 73 | 57 | 83 | 64 | 50 | 71 | 55 | 44 | 36 |
| 10 | 153 | 107 | 79 | 60 | 143 | 100 | 75 | 57 | 88 | 66 | 51 | 77 | 58 | 45 | 66 | 50 | 39 | 32 |


| Beam and Field Information | |
|----------------------------|---------------|
| CIE Type: | Semi-Direct |
| Center Beam Intensity: | 37.23 Candela |
| Central Cone Intensity: | 37 Candela |
| Beam Flux: | 327.1 Lumens |
| Beam Angle (0-180): | 265.7 Degrees |
| Beam Angle (90-270): | 265.7 Degrees |
| Field Angle (0-180): | 332.5 Degrees |
| Field Angle (90-270): | 332.5 Degrees |
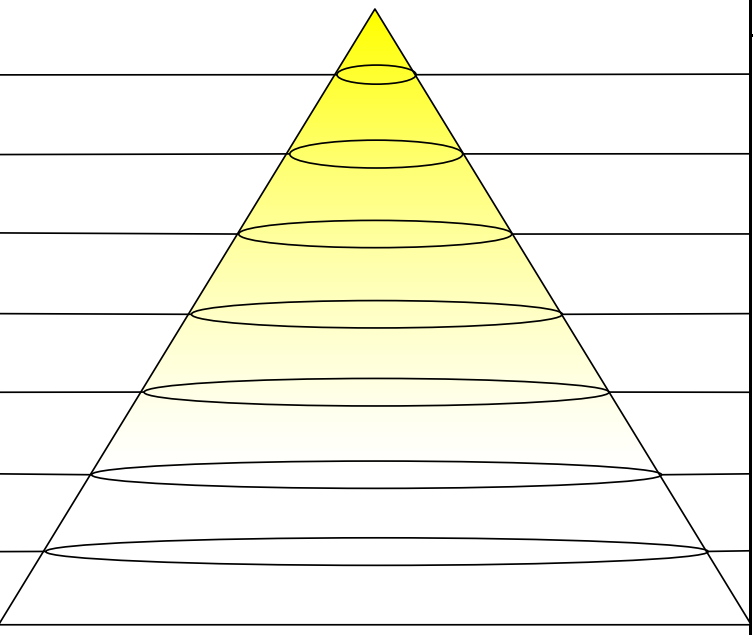
| Cone of Light Tabulation | | | |
|--------------------------|--|----------------------|-----------------|
| Mounting Height (Feet) | | Footcandles at Nadir | Diameter (Feet) |
| 4.00 |  | 2.33 | 6.56 |
| 6.00 | | 1.03 | 9.83 |
| 8.00 | | 0.582 | 13.1 |
| 10.0 | | 0.372 | 16.4 |
| 12.0 | | 0.259 | 19.7 |
| 14.0 | | 0.190 | 22.9 |
| 16.0 | | 0.145 | 26.2 |



ISOFootcandle Plot

Mounting Height - 10 Feet

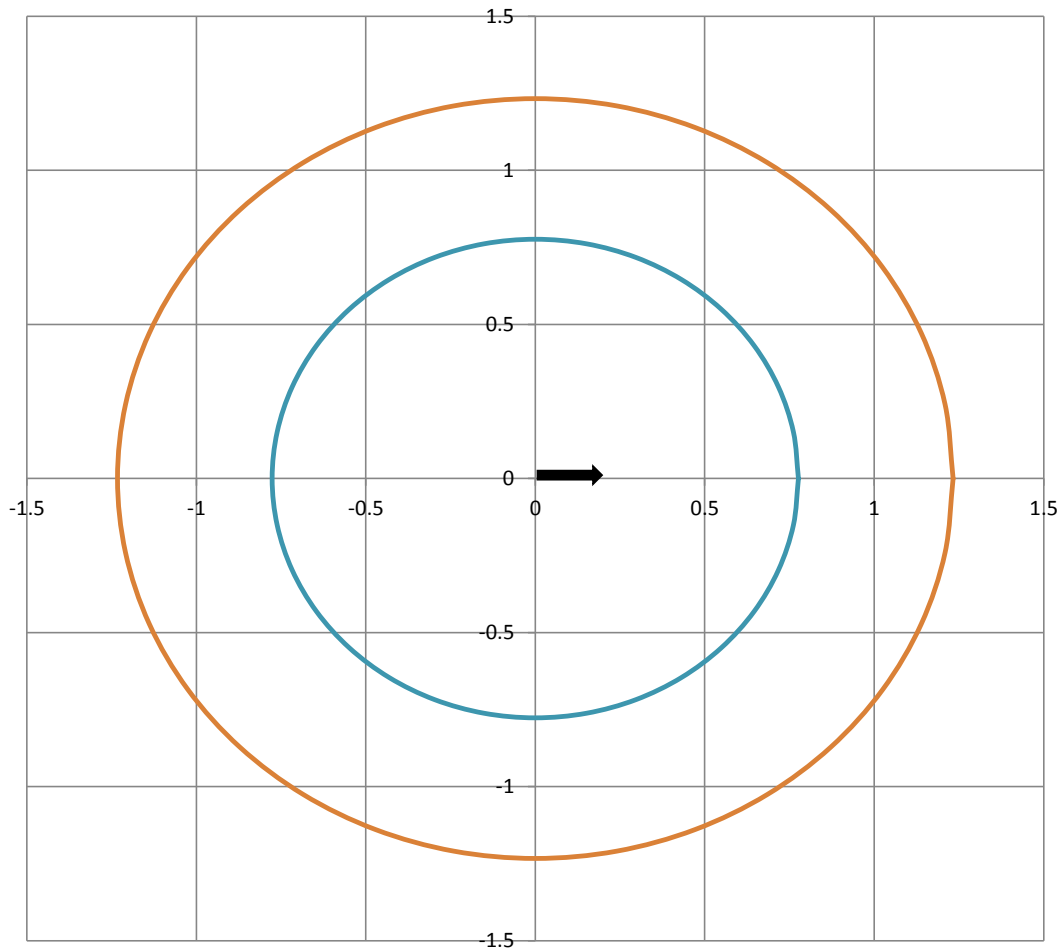


Grid Lines in Units of Mounting Height





IES "BUG" Rating
(Back Light, Uplight, Glare)
Per IES TM-15-11

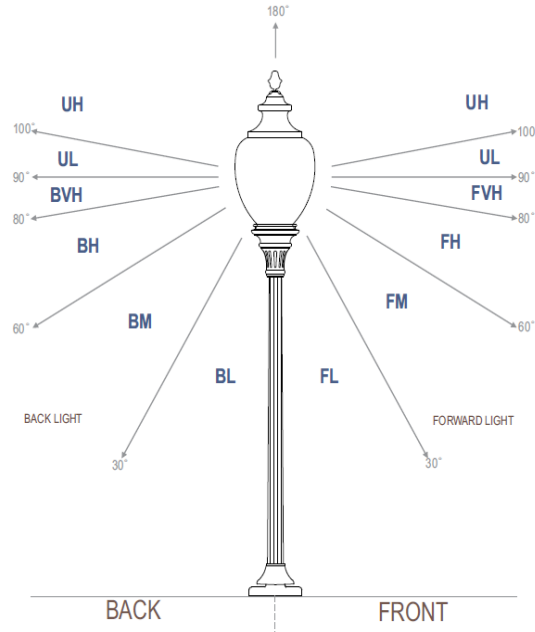

Luminaire Classification System (LCS)

| LCS | Zone | Lumens | Luminaire % |
|-------------------|-----------------|--------|-------------|
| FL | (0-30) | 16.8 | 4.8% |
| FM | (30-60) | 45.1 | 12.9% |
| FH | (60-80) | 34.2 | 9.7% |
| FVH | (80-90) | 15.3 | 4.4% |
| BL | (0-30) | 16.8 | 4.8% |
| BM | (30-60) | 45.1 | 12.9% |
| BH | (60-80) | 34.2 | 9.7% |
| BVH | (80-90) | 15.3 | 4.4% |
| UL | (90-100) | 29.4 | 8.4% |
| UH | (100-180) | 98.6 | 28.1% |
| Total | | 350.7 | 100.0% |
| BUG Rating | B0 U3 G1 | | |