



UL Verification Services Inc.  
7036 Snowdrift Road  
Allentown, PA 18106  
610-774-1300



## Photometric Test Report

Relevant Standards  
IES LM-79-2008, ANSI C82.77-2002

Prepared For  
**Auroralight Inc**  
2742 Loker Ave W  
#100  
Carlsbad, CA 92010-6619  
United States

Catalog Number  
**LDM350-360-27 (360° OPENING, 2700K)**

Order Number  
11263738  
Test Number  
1256649

Revision of Test Number 1256649E1 on:

2021-06-29  
Test Date

2018-03-08

Prepared By

Cordaryl Cousar, Technician

Approved By

Alexa Lambert, Project Handler

The results contained in this report pertain only to the tested sample.  
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.  
This report must not be used by the client to claim product certification, approval, or endorsement by  
NVLAP, NIST, or any agency of the Federal Government.



**Luminaire Description:** Cylindrical copper housing, brass domed top with four (4) 90° openings and clear acrylic lens. This report has been pro-rated using data from test number 11263738-1256649 and data from Auroralight Inc to account for differences in color temperature.

**Lamp:** One (1) Cree XHP 2700K LED  
**Mounting:** Recessed In-Grade/Wall

#### Luminaire



#### Luminaire Characteristics

Luminous Diameter: 3.50 in.  
Luminous Height: 0.410 in.

#### Summary of Results

Roadway Classification: Type I, Very Long  
Cutoff Classification: Noncutoff  
BUG Rating: B0 U2 G0

#### Test Conditions

Test Temperature: 24.1 °C  
Voltage: 11.89 VAC  
Current: 0.3318 A  
Power: 3.843 W  
Power Factor: 0.974  
Frequency: 60 Hz  
Current THD: 13.6 %

Tested in 30 planes left side, 30 planes right side, left and right averaged  
Vertical test increments are 2.5 degrees  
Test distance exceeds five times the greatest luminous opening of luminaire

Laboratory results may not be representative of field performance  
Ballast factors have not been applied



## Distribution - Goniophotometer

### Distribution Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
24.1 °C	11.89 VAC	0.3318 A	3.843 W	0.974	60 Hz	13.6 %

### Summary of Results

#### Spacing Criteria

0-180: 1.60

90-270: 1.67

#### Total Lumen Output:

54.94 Lumens


#### Luminaire Efficacy:

14.3 lm/w

#### Maximum Candela:

20 Candela

### Polar Plot

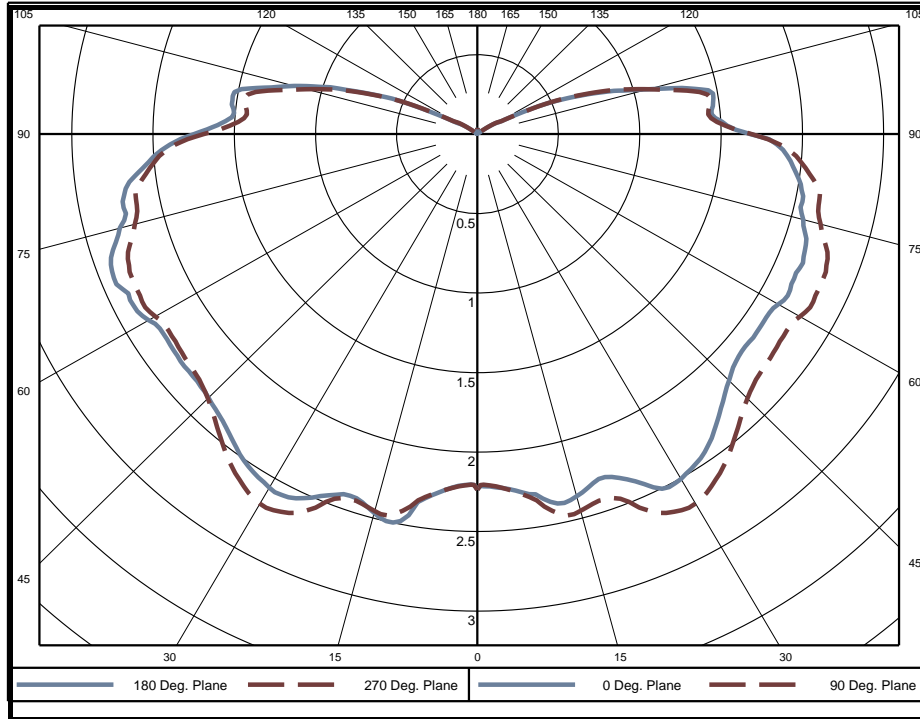

### Zonal Lumen Summary

Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	0.054	0.1%	60-65	2.180	4.0%	120-125	0.119	0.2%
5-10	0.167	0.3%	65-70	2.647	4.8%	125-130	0.047	0.1%
10-15	0.297	0.5%	70-75	2.822	5.1%	130-135	0.021	0.0%
15-20	0.415	0.8%	75-80	3.749	6.8%	135-140	0.017	0.0%
20-25	0.593	1.1%	80-85	6.244	11.4%	140-145	0.015	0.0%
25-30	0.783	1.4%	85-90	6.883	12.5%	145-150	0.012	0.0%
30-35	0.931	1.7%	90-95	7.200	13.1%	150-155	0.010	0.0%
35-40	1.056	1.9%	95-100	6.500	11.8%	155-160	0.008	0.0%
40-45	1.185	2.2%	100-105	3.892	7.1%	160-165	0.007	0.0%
45-50	1.367	2.5%	105-110	1.377	2.5%	165-170	0.005	0.0%
50-55	1.551	2.8%	110-115	0.767	1.4%	170-175	0.003	0.0%
55-60	1.756	3.2%	115-120	0.258	0.5%	175-180	0.001	0.0%

Zone	Lumens	% of Luminaire
0-40	4	7.8%
0-60	10	18.5%
0-90	35	63.1%
90-180	20	36.9%



**Candela Tabulation**  
Horizontal Angle (Degrees)

Vertical Angle (Degrees)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
	0	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24	2.24
	5	2.24	2.28	2.27	2.29	2.25	2.27	2.26	2.28	2.25	2.28	2.26	2.27	2.25	2.29	2.27
	10	2.33	2.45	2.51	2.48	2.38	2.42	2.45	2.44	2.45	2.45	2.42	2.38	2.48	2.51	2.45
	15	2.36	2.48	2.51	2.54	2.45	2.54	2.54	2.47	2.54	2.54	2.54	2.45	2.54	2.51	2.48
	20	2.30	2.67	2.72	2.68	2.44	2.69	2.75	2.63	2.41	2.63	2.75	2.69	2.44	2.68	2.72
	25	2.43	3.15	3.27	3.11	2.63	3.08	3.25	2.96	2.53	2.96	3.25	3.08	2.63	3.11	3.27
	30	2.51	3.31	3.49	3.32	2.68	3.28	3.45	3.10	2.57	3.10	3.45	3.28	2.68	3.32	3.49
	35	2.44	3.35	3.53	3.39	2.60	3.37	3.52	3.16	2.51	3.16	3.52	3.37	2.60	3.39	3.53
	40	2.31	3.35	3.53	3.41	2.47	3.41	3.54	3.17	2.41	3.17	3.54	3.41	2.47	3.41	3.53
	45	2.19	3.50	3.82	3.70	2.35	3.57	3.69	3.31	2.34	3.31	3.69	3.57	2.35	3.70	3.82
	50	2.13	3.75	4.34	4.16	2.29	3.78	3.90	3.52	2.32	3.52	3.90	3.78	2.29	4.16	4.34
	55	2.12	3.87	4.53	4.32	2.27	3.93	4.06	3.70	2.31	3.70	4.06	3.93	2.27	4.32	4.53
	60	2.14	4.58	5.19	5.03	2.29	4.76	4.87	4.50	2.34	4.50	4.87	4.76	2.29	5.03	5.19
	65	2.15	5.39	5.84	6.01	2.32	5.68	5.71	5.45	2.37	5.45	5.71	5.68	2.32	6.01	5.84
	70	2.15	6.32	6.66	6.75	2.29	6.64	6.40	6.37	2.40	6.37	6.40	6.64	2.29	6.75	6.66
	75	2.08	5.90	6.27	6.57	2.19	6.29	6.33	6.38	2.28	6.38	6.33	6.29	2.19	6.57	6.27
	80	2.03	13.40	11.48	11.56	2.14	13.90	13.38	14.13	2.21	14.13	13.38	13.90	2.14	11.56	11.48
	85	1.94	14.85	14.06	14.98	2.00	15.80	15.99	15.58	2.04	15.58	15.99	15.80	2.00	14.98	14.06
	90	1.68	16.39	16.62	17.42	1.69	19.33	18.79	19.00	1.75	19.00	18.79	19.33	1.69	17.42	16.62
	95	1.45	13.96	14.73	15.02	1.43	15.69	15.67	15.82	1.51	15.82	15.67	15.69	1.43	15.02	14.73
	100	1.47	13.62	16.01	15.40	1.44	15.65	16.35	17.08	1.52	17.08	16.35	15.65	1.44	15.40	16.01
	105	1.09	3.39	3.50	3.50	1.09	3.87	4.02	3.99	1.17	3.99	4.02	3.87	1.09	3.50	3.50
	110	0.75	2.42	2.50	2.56	0.77	2.75	2.85	2.78	0.77	2.78	2.85	2.75	0.77	2.56	2.50
	115	0.42	0.97	1.11	1.08	0.42	1.10	1.20	1.05	0.39	1.05	1.20	1.10	0.42	1.08	1.11
	120	0.15	0.34	0.42	0.38	0.16	0.33	0.37	0.30	0.13	0.30	0.37	0.33	0.16	0.38	0.42
	125	0.07	0.21	0.24	0.25	0.07	0.22	0.22	0.19	0.06	0.19	0.22	0.22	0.07	0.25	0.24
	130	0.01	0.07	0.07	0.07	0.01	0.07	0.07	0.07	0.01	0.07	0.07	0.07	0.01	0.07	0.07
	135	0.01	0.06	0.06	0.06	0.01	0.06	0.06	0.06	0.01	0.06	0.06	0.06	0.01	0.06	0.06
	140	0.01	0.05	0.06	0.06	0.01	0.06	0.06	0.06	0.01	0.06	0.06	0.06	0.01	0.06	0.06
	145	0.01	0.05	0.05	0.06	0.01	0.06	0.05	0.05	0.00	0.05	0.05	0.06	0.01	0.06	0.05
	150	0.01	0.05	0.05	0.05	0.01	0.06	0.05	0.05	0.01	0.05	0.05	0.06	0.01	0.05	0.05
	155	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05
	160	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05
	165	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.00	0.05	0.05	0.05	0.01	0.05	0.05
	170	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05
	175	0.00	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05	0.05	0.01	0.05	0.05
	180	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04

**Average Luminance (cd/m<sup>2</sup>)**  
Horizontal Angle (Degrees)

Vertical Angle (Degrees)	0	45	90
	0	360	360
	45	1207	1294
	55	678	725
	65	617	664
	75	541	569
	85	478	494



### Utilization of Lumens - Zonal Cavity Method

Effective Floor Cavity Reflectance 20%																		
Ceiling Cavity Reflectance	80				70				50			30			10			0
Wall Reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Room Cavity Ratio (RCR)	** Values are expressed as Lumens delivered to the task surface **																	
0	61	61	61	61	57	57	57	57	50	50	50	43	43	43	37	37	37	35
1	50	45	40	37	46	41	38	34	35	32	29	29	27	25	24	22	20	18
2	44	37	31	27	40	34	29	25	29	25	21	24	21	18	19	17	14	12
3	39	32	26	21	36	29	24	19	24	20	16	20	17	14	16	13	11	8
4	35	27	21	17	32	25	20	16	21	17	13	17	14	11	14	11	9	7
5	32	24	18	14	30	22	17	13	19	14	11	15	12	9	12	9	7	5
6	30	21	16	12	27	20	15	11	17	12	9	14	10	8	11	8	6	4
7	27	19	14	10	25	18	13	9	15	11	8	12	9	7	10	7	5	4
8	25	17	12	9	23	16	11	8	14	10	7	11	8	6	9	7	4	3
9	24	16	11	8	22	15	10	7	13	9	6	10	7	5	9	6	4	3
10	22	14	10	7	20	13	9	6	12	8	5	10	7	4	8	5	4	2


Beam and Field Information	
CIE Type:	Semi-Direct
Center Beam Intensity:	2.24 Candela
Central Cone Intensity:	2 Candela
Beam Flux:	54.2 Lumens
Beam Angle (0-180):	210.4 Degrees
Beam Angle (90-270):	209.2 Degrees
Field Angle (0-180):	235.3 Degrees
Field Angle (90-270):	235.7 Degrees

Cone of Light Tabulation			
Mounting Height (Feet)		Footcandles at Nadir	Diameter (Feet)
4.00		0.140	8.24
6.00		0.0621	12.4
8.00		0.0349	16.5
10.0		0.0224	20.6
12.0		0.0155	24.7
14.0		0.0114	28.9
16.0		0.00874	33.0




## ISOFootcandle Plot

Mounting Height - 2 Feet

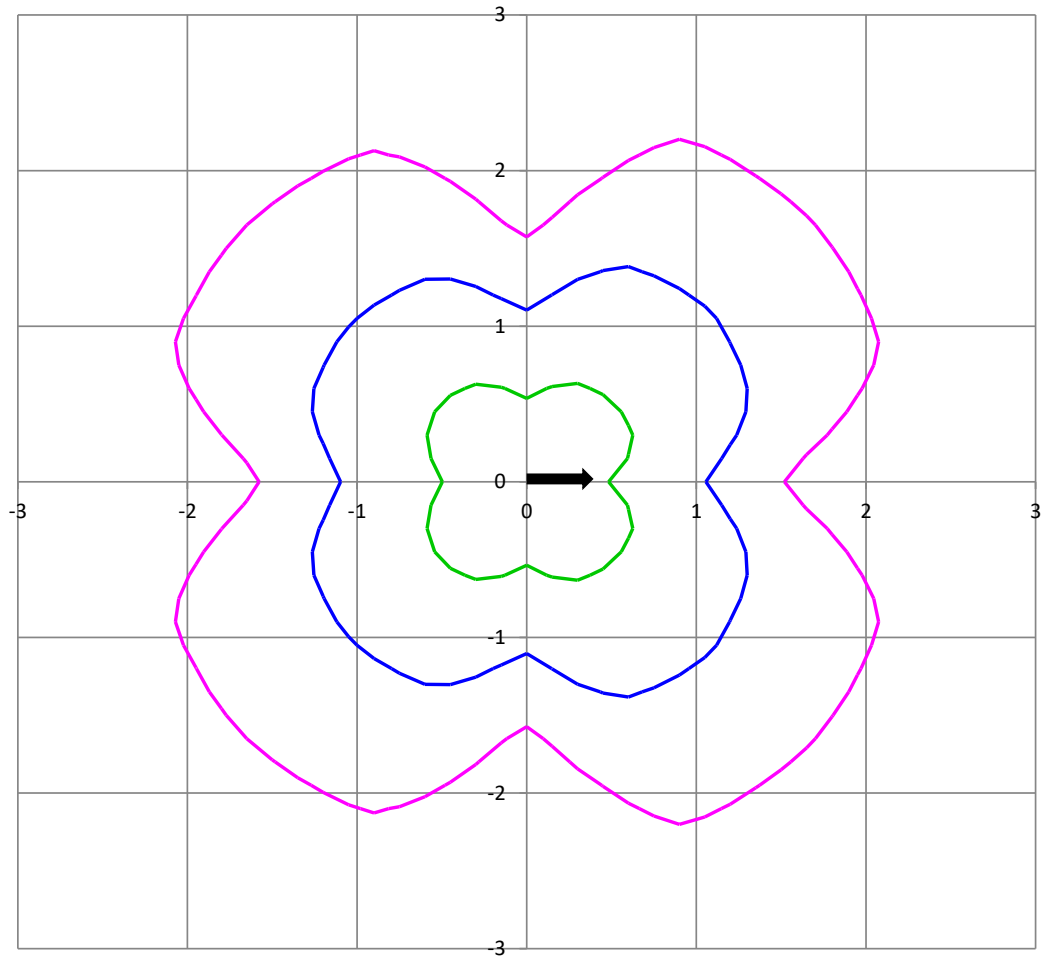


Grid Lines in Units of Mounting Height





**IES "BUG" Rating**  
(Back Light, Uplight, Glare)  
Per IES TM-15-11

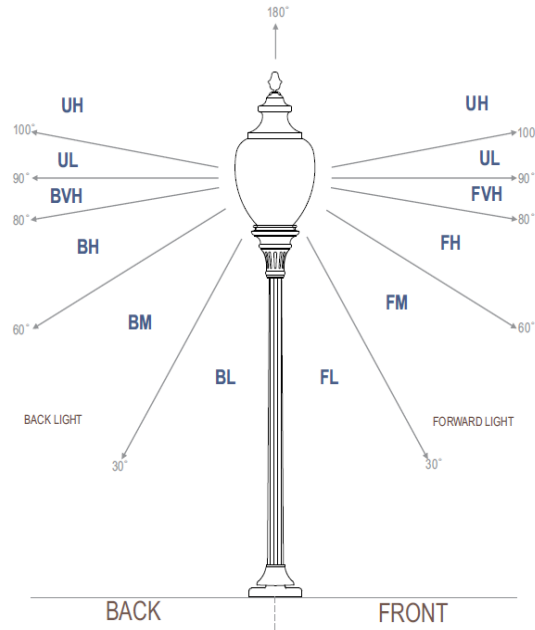

Luminaire Classification System (LCS)

LCS	Zone	Lumens	Luminaire %
FL	(0-30)	1.2	2.0%
FM	(30-60)	4.0	7.0%
FH	(60-80)	5.8	10.2%
FVH	(80-90)	6.6	11.5%
BL	(0-30)	1.2	2.0%
BM	(30-60)	3.8	6.7%
BH	(60-80)	5.8	10.2%
BVH	(80-90)	7.2	12.6%
UL	(90-100)	14.7	25.7%
UH	(100-180)	6.9	12.0%
Total		57.2	100.0%
<b>BUG Rating</b>	<b>B0 U2 G0</b>		



## Attachment A

## Amended Report Documentation

[illegible]