



UL Verification Services Inc.  
7036 Snowdrift Road  
Allentown, PA 18106  
610-774-1300

## Photometric Test Report

Relevant Standards  
IES LM-79-2008, ANSI C82.77-2002

**Prepared For**  
**Auroralight Inc**

2742 Loker Ave W  
#100  
Carlsbad, CA 92010-6619  
United States

**Catalog Number**  
**LSW16-M-27 (25° OPTIC, 2700K)**

Order Number  
12043087  
Test Number  
12043087.14

Report Date

2018-02-13

Prepared By

Alexa Lambert, Project Handler

Approved By

Kevin Rodriguez, Project Handler

The results contained in this report pertain only to the tested sample.  
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.  
This report must not be used by the client to claim product certification, approval, or endorsement by  
NVLAP, NIST, or any agency of the Federal Government.



**Luminaire Description:** Cylindrical brass housing with circular brass domed faceplate, clear glass lens and PVC sleeve  
**Lamp:** One (1) Cree XP-L 2700K LED with 25° medium silicone optic  
**Mounting:** Recessed - Wall  
**Ballast/Driver:** Integrated  
**Note:** This report has been pro-rated using data from report number 12043087.01, 12043087.02, 12043087.03, and 12043087.13 to account for differences in color temperature.

#### Luminaire



#### Luminaire Characteristics

Luminous Length: 0.75 in.  
Luminous Width: 1.750 in.  
Luminous Height: 0.75 in.

#### Summary of Results

Roadway Classification: Type I, Very Short  
Cutoff Classification: Noncutoff  
BUG Rating: B0 U1 G1

#### Test Conditions

Test Temperature: 25.0 °C  
Voltage: 11.99 VAC  
Current: 0.4266 A  
Power: 3.089 W  
Power Factor: 0.604  
Frequency: 60 Hz  
Current THD: 83.1 %

Tested in 30 planes left side, 30 planes right side, left and right averaged  
Vertical test increments are 2.5 degrees  
Test distance exceeds five times the greatest luminous opening of luminaire

Laboratory results may not be representative of field performance  
Ballast factors have not been applied



## Distribution - Goniophotometer

### Distribution Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
25.0 °C	11.99 VAC	0.4266 A	3.089 W	0.604	60 Hz	83.1 %

### Summary of Results

#### Spacing Criteria

0-180: 0.85  
90-270: 1.32

#### Total Lumen Output:

63.98 Lumens


#### Luminaire Efficacy:

20.7 lm/w

#### Maximum Candela:

354 Candela

### Polar Plot

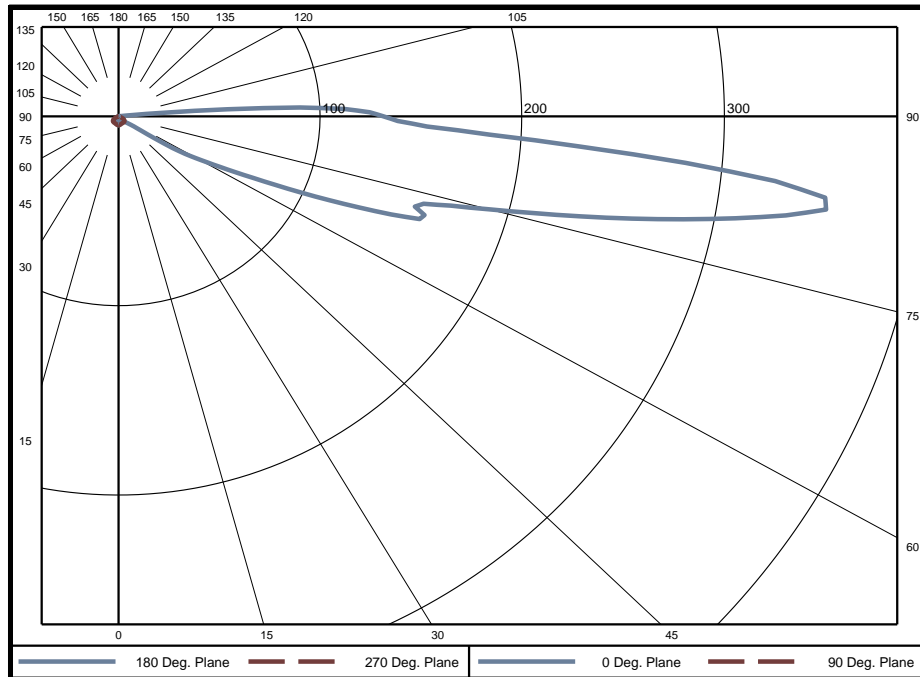

### Zonal Lumen Summary

Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	0.11	0.2%	60-65	3.16	4.9%	120-125	0.03	0.0%
5-10	0.31	0.5%	65-70	6.22	9.7%	125-130	0.02	0.0%
10-15	0.49	0.8%	70-75	9.48	14.8%	130-135	0.01	0.0%
15-20	0.60	0.9%	75-80	12.83	20.1%	135-140	0.00	0.0%
20-25	0.64	1.0%	80-85	13.52	21.1%	140-145	0.00	0.0%
25-30	0.64	1.0%	85-90	6.76	10.6%	145-150	0.00	0.0%
30-35	0.65	1.0%	90-95	3.31	5.2%	150-155	0.00	0.0%
35-40	0.67	1.0%	95-100	0.23	0.4%	155-160	0.00	0.0%
40-45	0.70	1.1%	100-105	0.08	0.1%	160-165	0.00	0.0%
45-50	0.80	1.3%	105-110	0.06	0.1%	165-170	0.00	0.0%
50-55	0.93	1.5%	110-115	0.05	0.1%	170-175	0.00	0.0%
55-60	1.63	2.5%	115-120	0.04	0.1%	175-180	0.00	0.0%

Zone	Lumens	% of Luminaire
0-40	4	6.4%
0-60	8	12.8%
0-90	60	94.0%
90-180	4	6.0%



**Candela Tabulation**  
Horizontal Angle (Degrees)

Vertical Angle (Degrees)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
	0	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	5	4.2	4.2	4.2	4.4	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.4	4.2	4.2
	10	4.0	4.0	4.0	4.1	4.5	4.5	4.4	4.4	4.4	4.4	4.5	4.5	4.1	4.0	4.0
	15	3.7	3.7	3.7	3.8	4.3	4.4	4.1	3.8	3.6	3.8	4.1	4.4	4.3	3.8	3.7
	20	3.2	3.3	3.3	3.5	4.1	4.1	3.5	2.4	2.0	2.4	3.5	4.1	4.1	3.5	3.3
	25	2.8	2.8	2.9	3.3	4.0	3.9	2.4	1.2	0.8	1.2	2.4	3.9	4.0	3.3	2.9
	30	2.5	2.3	2.6	3.2	4.0	3.7	1.5	0.1	0.0	0.1	1.5	3.7	4.0	3.2	2.6
	35	2.6	2.2	2.2	3.0	4.0	3.5	0.7	0.0	0.0	0.0	0.7	3.5	4.0	3.0	2.2
	40	2.7	2.2	1.9	2.8	4.0	3.1	0.1	0.0	0.0	0.0	0.1	3.1	4.0	2.8	1.9
	45	3.6	2.7	1.9	2.5	3.8	2.6	0.0	0.0	0.0	0.0	0.0	2.6	3.8	2.5	1.9
	50	5.1	3.9	1.9	2.2	3.6	2.1	0.0	0.0	0.0	0.0	0.0	2.1	3.6	2.2	1.9
	55	9.0	5.5	1.9	1.8	3.2	1.6	0.0	0.0	0.0	0.0	0.0	1.6	3.2	1.8	1.9
	60	44.0	9.4	1.8	1.3	2.6	1.2	0.0	0.0	0.0	0.0	0.0	1.2	2.6	1.3	1.8
	65	85.5	23.2	1.6	0.9	1.5	0.7	0.0	0.0	0.0	0.0	0.0	0.7	1.5	0.9	1.6
	70	158.6	47.1	1.2	0.6	0.6	0.3	0.0	0.0	0.0	0.0	0.0	0.3	0.6	0.6	1.2
	75	189.5	70.6	0.7	0.4	0.4	0.2	0.0	0.0	0.1	0.0	0.0	0.2	0.4	0.4	0.7
	80	310.0	54.7	0.5	0.3	0.2	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.2	0.3	0.5
	85	281.8	12.6	0.3	0.2	0.1	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.1	0.2	0.3
	90	131.2	4.0	0.3	0.2	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.2	0.3	4.0
	95	21.1	0.9	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.1	0.2	0.9
	100	1.0	0.4	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.1	0.2	0.4
	105	0.6	0.4	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.1	0.2	0.4
	110	0.5	0.4	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.1	0.4
	115	0.4	0.3	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.1	0.3
	120	0.4	0.3	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.1	0.3
	125	0.4	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2
	130	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1
	135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	140	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	145	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	150	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	155	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	160	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	165	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	170	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	175	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Average Luminance (cd/m<sup>2</sup>)**

Vertical Angle (Degrees)	Horizontal Angle (Degrees)		
	0	45	90
0	5451	5451	5451
45	2974	1603	4499
55	7669	1572	4132
65	76010	1426	2156
75	182800	654	661
85	307100	367	266



### Utilization of Lumens - Zonal Cavity Method

Effective Floor Cavity Reflectance 20%																		
Ceiling Cavity Reflectance	80				70				50			30			10			0
Wall Reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Room Cavity Ratio (RCR)	** Values are expressed as Lumens delivered to the task surface **																	
0	75	75	75	75	73	73	73	73	69	69	69	65	65	65	62	62	62	60
1	58	50	44	38	55	48	42	36	44	39	34	41	37	32	38	34	31	28
2	49	39	30	23	46	37	29	22	33	27	21	30	25	20	27	23	19	16
3	43	31	23	16	40	30	22	15	27	20	14	24	18	13	22	17	12	10
4	39	27	18	12	36	25	17	11	23	16	10	21	15	10	19	13	9	7
5	35	23	15	9	33	22	15	9	20	13	8	18	12	8	17	11	7	5
6	32	21	13	8	31	20	13	7	18	12	7	17	11	6	15	10	6	4
7	30	19	12	7	28	18	11	6	17	10	6	15	10	6	14	9	5	4
8	28	17	10	6	27	16	10	6	15	9	5	14	9	5	13	8	5	3
9	26	16	9	5	25	15	9	5	14	9	5	13	8	4	12	7	4	3
10	25	15	9	5	23	14	8	4	13	8	4	12	7	4	11	7	4	2


Beam and Field Information	
CIE Type:	Direct
Center Beam Intensity:	4.6 Candela
Central Cone Intensity:	5 Candela
Beam Flux:	61.2 Lumens
Beam Angle (0-180):	116.4 Degrees
Beam Angle (90-270):	123.3 Degrees
Field Angle (0-180):	137.3 Degrees
Field Angle (90-270):	145.9 Degrees

Cone of Light Tabulation			
Mounting Height (Feet)		Footcandles at Nadir	Diameter (Feet)
4.00		0.288	3.45
6.00		0.128	5.18
8.00		0.0721	6.90
10.0		0.0462	8.63
12.0		0.0321	10.4
14.0		0.0236	12.1
16.0		0.0180	13.8




## ISOFootcandle Plot

Mounting Height - 2 Feet

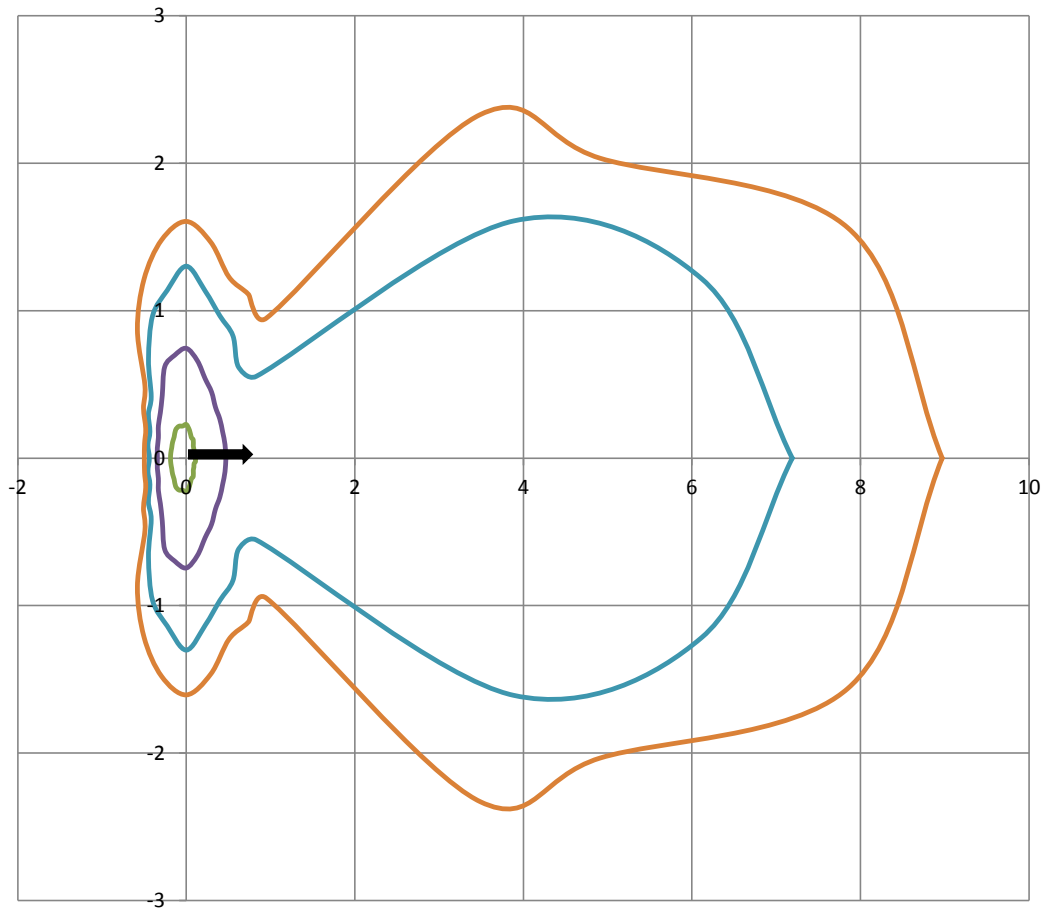

Grid Lines in Units of Mounting Height





**IES "BUG" Rating**  
(Back Light, Uplight, Glare)  
Per IES TM-15-11



**Luminaire Classification System (LCS)**

LCS	Zone	Lumens	Luminaire %
FL	(0-30)	1.4	2.3%
FM	(30-60)	4.1	6.6%
FH	(60-80)	31.5	50.3%
FVH	(80-90)	19.5	31.1%
BL	(0-30)	1.3	2.2%
BM	(30-60)	1.3	2.1%
BH	(60-80)	0.2	0.4%
BVH	(80-90)	0.0	0.0%
UL	(90-100)	2.9	4.6%
UH	(100-180)	0.3	0.5%
Total		62.6	100.0%
<b>BUG Rating</b>	<b>B0 U1 G1</b>		