## **PENDANTS**







PD85124-BK Black

White


## **SPECIFICATION DETAILS**

\* For custom options, consult factory for details.

Fixture Dimensions	L23-5/8" x W23-5/8" x H1"
Light Source	LED with DC Driver
Wattage	60W
Total Lumens	3825lm
Delivered Lumens	BK-1575lm; WH-2115lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
LED Rated Life Dimming	50,000 hours  100% - 10%, TRIAC or ELV Dimmer (Not Included)
	<u> </u>
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Dimming Diffuser Details	100% - 10%, TRIAC or ELV Dimmer (Not Included) White Acrylic Diffuser
Dimming Diffuser Details Adjustable	100% - 10%, TRIAC or ELV Dimmer (Not Included) White Acrylic Diffuser Yes
Dimming Diffuser Details Adjustable Wire Length	100% - 10%, TRIAC or ELV Dimmer (Not Included) White Acrylic Diffuser Yes 120" Max
Dimming Diffuser Details Adjustable Wire Length Wire Type	100% - 10%, TRIAC or ELV Dimmer (Not Included) White Acrylic Diffuser Yes 120" Max Clear Coaxial Wire
Dimming Diffuser Details Adjustable Wire Length Wire Type Location	100% - 10%, TRIAC or ELV Dimmer (Not Included) White Acrylic Diffuser Yes 120" Max Clear Coaxial Wire Dry

## **DESCRIPTION**

A suspended rectilinear frame emits soft luminance downward from the continuous perimeter opal diffuser. Veiled within the aluminum extrusion is a secondary set of LED lights sending ambient illumination up toward the ceiling. Utilizing a minimal orthogonal outline the PIAZZA series creates an airy effect with the center of the fixture transparent and open. Available as essential singular pendant or dramatic multi-pendant configurations.

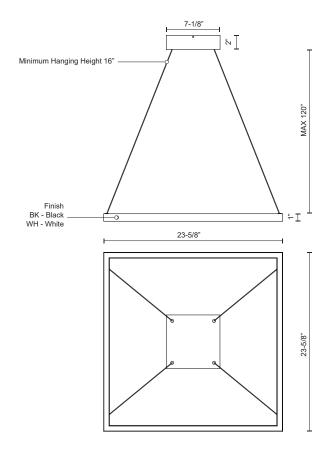



19054 28TH AVENUE SURREY - BC V3Z 6M3 CANADA COMMENT



