

AURORALIGHT

PROJECT:

SKU #:

TYPE:

CENTRO

RDL331103

Building upon the success of our esteemed In-grades, we are proud to introduce the latest addition to our lighting portfolio - the Centro downlight; employing our remarkably versatile light module.

- IP67 Rated for Interior or Exterior Wet Location Use
- IC Rated for Insulation Contact, UL Class 2
- Thermally Regulated for Maximum Performance
- Ideal for overhangs, eaves and architectural features

CONFIGURATOR:


RDL331103	LED	FINISH
() = Most common configuration	(2704) 2700K 4W (2706) 2700K 6W (3004) 3000K 4W (3006) 3000K 6W	(NAT) Natural Brass (BLP) Bronze Living Patina (BLPX) Extra Dark BLP (NI) Nickel PVD

AVAILABLE FINISHES:



FIXTURE DIMENSIONS	L2-3/8" x D3-1/4"
LIGHT SOURCE	Integrated LED
COLOR TEMPERATURES	2700K, 3000K
WATTAGES	4W, 6W
CRI (RA)	80 CRI
VOLTAGE	12V
DELIVERED LUMENS	420lm (3000K 6W)
DIMMABLE	Yes, Dim to <10% via Transformer
DRIVER	Yes, 12V Integral Constant Current
TRANSFORMER	12V AC/DC (Supplied by others)
MOUNT	Yes, Aluminum Torsion Springs
ACCESSORIES	Yes, Not Included
OPTICS	Yes, Included 20°, 40° & 60°
FINISH	Included Natural Brass
MATERIAL	Brass
WIRE LENGTH	24"
LOCATION	Interior or Exterior Wet
CERTIFICATIONS	UL, IP66, IP67, IC, Dark Sky

*For complete warranty terms, please visit: www.auroralight.com/warranty/

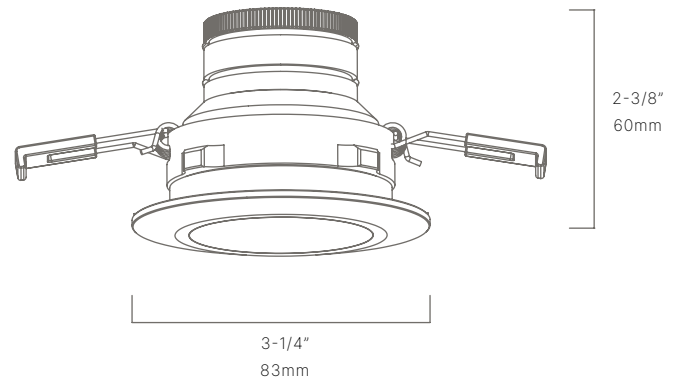

P. 760.931.2910

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com

MADE IN USA
WITH DOMESTIC & IMPORTED MATERIALS



AURORALIGHT

PROJECT: _____

SKU #: _____TYPE: _____

ADD-ONS

ACCESSORIES

H003	Hex Baffle
SBH113	Stepped Baffle

