

Quartz Topper Installation Guide

OCCASIONAL TABLES





Caulk




Quartz Topper




Base

3.1

Apply caulk to top of base. Caulk should not be closer than 1 inch from the edge.

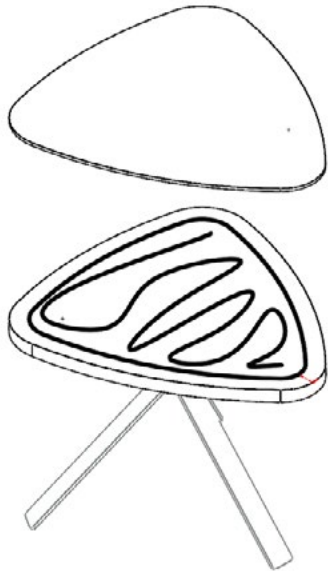**3.2**

Align topper with the top of the base and press firmly together. Assembly complete.

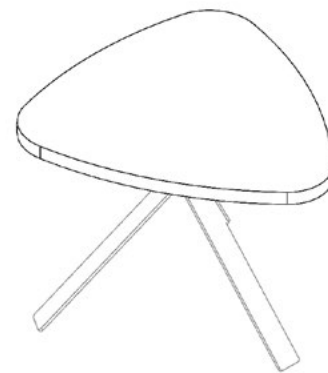

ENWORK

1.800.815.7251
enwork.com

12900 Christopher Dr. Lowell, MI 49331

Specifications subject to change without notice.
Rev 03.2023