




if it flows,
we go with it

1.800.665.4499
barrplastics.com


QUAD 4000 SERIES DIAPHRAGM PUMP

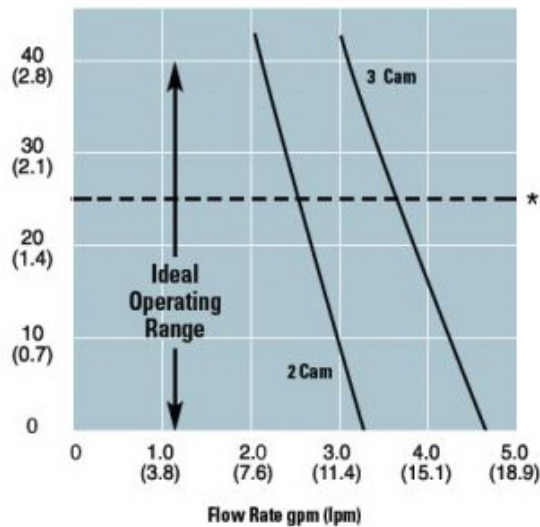

*Continuous Duty Max Pressure For No Switch 3 Cam Models

SPECIFICATIONS

Flow Rate	3.5 to 5.0 GPM (13.2 and 18.9 LPM) Nominal
Pump Design	Diaphragm
Motor	TEFC/TENV Permanent Magnet Motor
Voltage	12 & 24 Volt DC, 115 & 230 Volt AC
Cycle	50/60 hertz for AC Models
Current	1.5 amp max. (115 V)
Pressure Switch Setting	45 PSI (3.2 bar) cut out
Maximum Operating Pressure	40 PSI (2.8 bar)
Self-Priming	Up to 8 ft. (2.4 m) Vertical Height
Ports *	Plug-In Ports 1/2" (12.7mm) or 3/4" (19mm) Hose Barb Standard
Wetted Parts	Housing Modified Polypropylene - Standard, Elastomer Santoprene® and Buna - Standard
Net Weight	4 lbs. (2 kg)

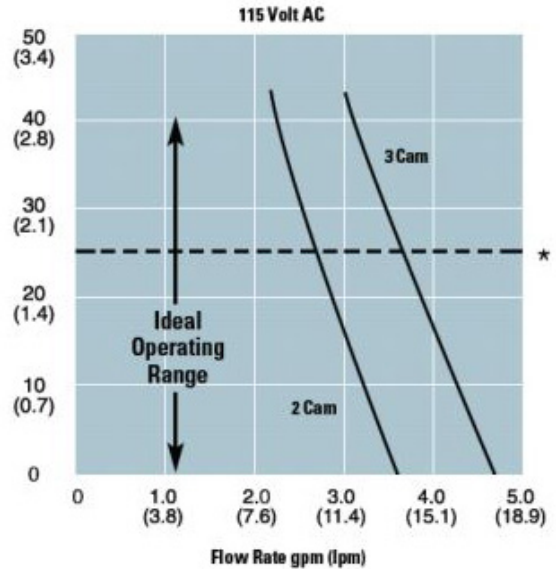

*Continuous Duty Max Pressure For No Switch 3 Cam Models

DIMENSIONAL DRAWING

UNLESS OTHERWISE STATED DIMENSIONS IN [] ARE IN MM.

