



if it flows,
we go with it


1.800.665.4499
barrplastics.com

External Filters for GRAF Carat S

Optimax Filter

This external filter provides over 95% water yield and is low maintenance as it is self cleaning. Use for roof surfaces up to 3,700 sq. ft. with DN100 connections or 8,000 sq. ft. with DN150 connections.

Using a telescopic dome shaft, it features a continuously variable installation depth of 22.8" to 41.3" with a minimal height offset of 8" between inlet and outlet. The Opticlean cleaning unit is available as a separate product (does not include hose)

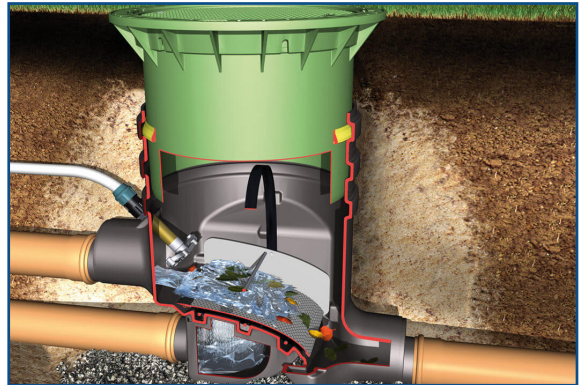


| Part # | Description |
|--------|---|
| 340030 | Optimax External Filter suitable for pedestrian loading |
| 340031 | Optimax External Filter suitable for vehicle loading |
| 340041 | Opticlean external (without hose) |

| Connecting dimensions | |
|-----------------------|---------------|
| Inlet | 13" - 31.5" |
| Outlet | 20.9" - 39.3" |
| To the sewer | 20.9" - 39.3" |

Minimax Filter

Use the Minimax filter for roof surfaces up to 3,700 sq. ft. with standard 4" connections. Using a telescopic dome shaft, it features a continuously variable installation depth of 19.1" to 38.2" with a 3.9" offset between the inlet and outlet. The filter carries a sieve inset mesh with a width of 0.01".

The Miniclean cleaning unit is available as a separate product.

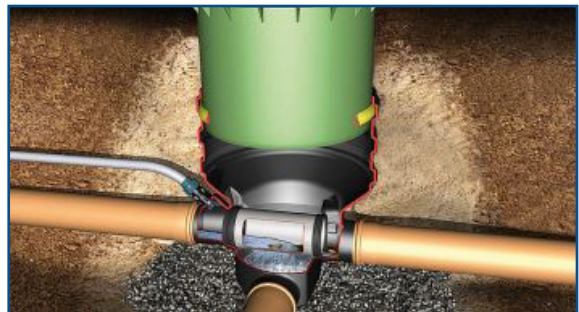

| Part # | Description |
|--------|---|
| 340061 | Minimax External Filter suitable for pedestrian loading |
| 340062 | Minimax External Filter suitable for vehicle loading |
| 340045 | Miniclean external |

| Connecting dimensions | |
|-----------------------|---------------|
| Inlet | 13" - 31.5" |
| Outlet | 16.9" - 35.4" |
| To the sewer | 13.4" - 31.9" |