



if it flows,
we go with it


1.800.665.4499
barrplastics.com

External Filters for GRAF Carat S

Industrial Optimax Filter

This external filter is ideal for roof surfaces up to 8,000 sq. ft. with DN 100 connections or 16,100 sq. ft. with DN 150 connections using patented filter technology.

Smooth installation depths are possible from 28.9" to 51.9" using the telescopic dome shaft. There is only a 8.8" height offset between the inlet & outlet.

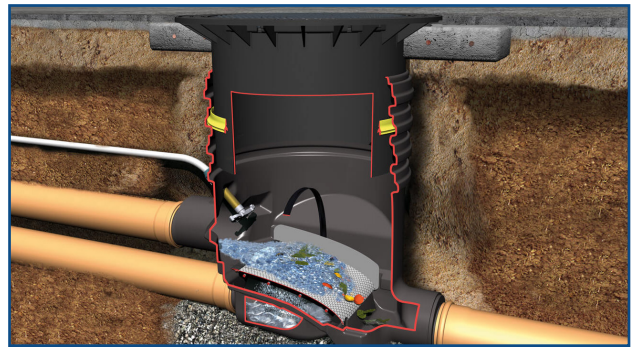


Part #	Description
340035	Optimax Industrial External Filter suitable for pedestrian loading
340036	Optimax Industrial External Filter suitable for vehicle loading
340041	Optimax Cleaning Unit External (hose not included)

Connecting dimensions	
Inlet	10.7" - 28.5"
Outlet	25.8" - 48.9"
To the sewer	25.8" - 48.9"

Universal 3 Industrial Filter

Use this filter for roof surfaces up to 8,000 sq. ft. with DN 100 connections or 12,900 sq. ft. with DN 150 connections.

Features continuously variable installation depths of 26.7" to 50" using the telescopic dome shaft. There is only 9" height offset between the inlet and outlet.

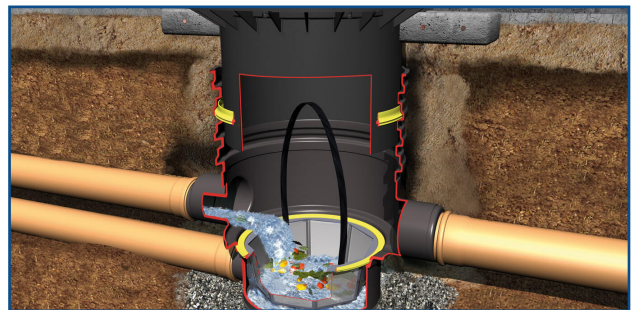

Part #	Description
340050	Universal 3 Industrial Filter Suitable for pedestrian loading
340051	Universal 3 Industrial Filter Suitable for vehicle loading

Connecting dimensions	
Inlet	15.5" - 37.9"
Outlet	24.6" - 46.9"
Emergency Overflow	15.5" - 37.9"