


QSFP-100G-EXT22CM-C

MSA and TAA Compliant 100GBase-CU QSFP28 to QSFP28 Male to Female Direct Attach Extension Cable (Passive Twinax, 22cm, 30AWG)

Features

- Low EMI radiation
- Insertion Loss < 7.0dB @12.89GHZ/channel within 50cm
- Oil resistance, dust-proof and anti-corrosion
- 100 ohm differential impedance system
- Low Near-End Crosstalk (NEXT)
- Compliant with QSFP-MSA
- Compliant with SFF-8436 and SFF-8665
- IEEE 802.3bj Compliant
- Compliant with Infiniband EDR
- Operating Temperature: 0°C to 70°C
- ROHS Compliant

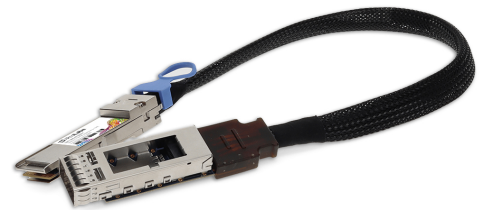

Applications

- Extend the 100Gb/s high speed interconnection for liquid immersion solution
- Extend the link of 100G AOC
- Extend the link of 100G transceiver

Product Description

This is an MSA compliant 100GBase-CU QSFP28 to QSFP28 direct attach extension cable that operates over passive copper with a maximum reach of 22cm (0.6ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLab's direct attach extension cables are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compliant with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Storage Temperature	Ts	-20		80	°C
Operating Case Temperature	Top	0	25	70	°C
Data Rate per Lane			25.78125		Gbps

General Specifications

Parameter	Specification	Notes
Feature	Adapter (convert connector type to cage type) with extended cable	
Connector Type	QSFP28 (SFF-8665)	
Cage Type	QSFP28 cage	
Wire Gauge	30AWG	
Length	22cm	The length excludes connector and cage
Latch Color	Sky Blue	


Pin Assignment

WIRING DIAGRAM

HIGH SPEED SIGNAL				
P1(QSFP28 PLUG)			P2(QSFP28 RECEPTACLE)	
PAD	SIGNAL		PAD	SIGNAL
02	TX2n		02	TX2n
03	TX2p		03	TX2p
05	TX4n		05	TX4n
06	TX4p		06	TX4p
14	RX3p		14	RX3p
15	RX3n		15	RX3n
17	RX1p		17	RX1p
18	RX1n		18	RX1n
21	RX2n		21	RX2n
22	RX2p		22	RX2p
24	RX4n		24	RX4n
25	RX4p		25	RX4p
33	TX3p		33	TX3p
34	TX3n		34	TX3n
36	TX1p		36	TX1p
37	TX1n		37	TX1n
08	ModSelL		08	ModSelL
09	ResetL		09	ResetL
10	VccRx		10	VccRx
11	SCL		11	SCL
12	SDA		12	SDA
27	ModPrsL		27	ModPrsL
28	IntL		28	IntL
29	VccTx		29	VccTx
30	Vcc1		30	Vcc1
31	LPMode		31	LPMode
GND GROUP	GND		GND GROUP	GND
GND GROUP 01,04,07,13,16,19 20,23,26,32,35,38			GND GROUP 01,04,07,13,16,19 20,23,26,32,35,38	
CONNECTOR SHELL			CONNECTOR SHELL	

*DC BLOCKING CAPS ON P1,P2 RX END.

Mechanical Dimensions

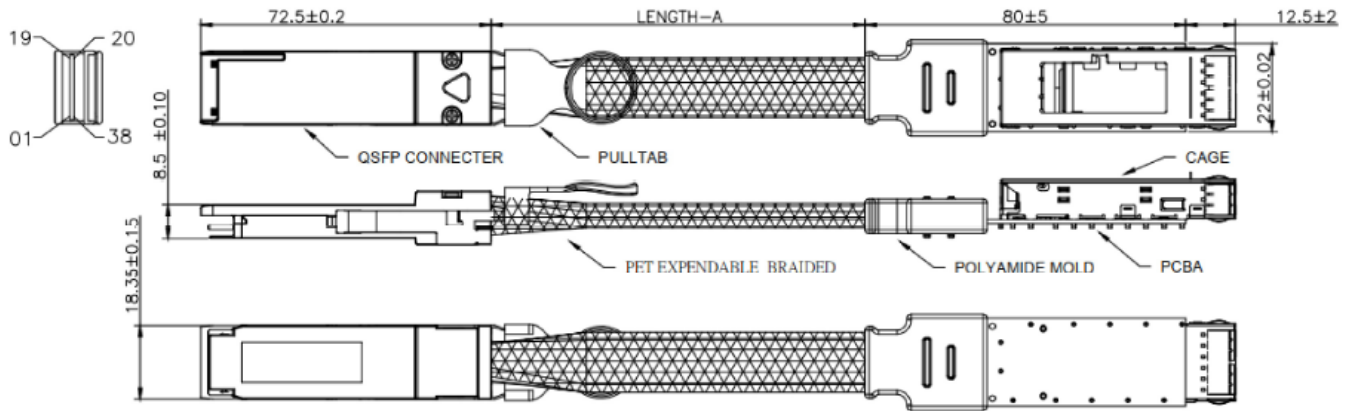

AWG	LENGTH-A(mm)
.30	220±30
.30	360±30

Notes:

1. Standard length as LENGTH-A in drawing with tolerance. Option of LENGTH-A: 22cm and 36cm
2. Unit: mm
3. Compliant with IEEE802.3bj
4. LED function: Once pluggable QSFP28 connector end of the extender plugged into an equipment that support Vcc power 3.3v, the LED will be ON.

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.

Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salesupport@prolabs.com

Telephone: +44 1285 719 600